This is a digital copy of a book that was preserved for generations on library shelves before it was carefully scanned by Google as part of a project to make the world's books discoverable online.

It has survived long enough for the copyright to expire and the book to enter the public domain. A public domain book is one that was never subject to copyright or whose legal copyright term has expired. Whether a book is in the public domain may vary country to country. Public domain books are our gateways to the past, representing a wealth of history, culture and knowledge that's often difficult to discover.

Marks, notations and other marginalia present in the original volume will appear in this file - a reminder of this book's long journey from the publisher to a library and finally to you.

Usage guidelines

Google is proud to partner with libraries to digitize public domain materials and make them widely accessible. Public domain books belong to the public and we are merely their custodians. Nevertheless, this work is expensive, so in order to keep providing this resource, we have taken steps to prevent abuse by commercial parties, including placing technical restrictions on automated querying.

We also ask that you:

+ *Make non-commercial use of the files* We designed Google Book Search for use by individuals, and we request that you use these files for personal, non-commercial purposes.

+ *Refrain from automated querying* Do not send automated queries of any sort to Google's system: If you are conducting research on machine translation, optical character recognition or other areas where access to a large amount of text is helpful, please contact us. We encourage the use of public domain materials for these purposes and may be able to help.

+ *Maintain attribution* The Google "watermark" you see on each file is essential for informing people about this project and helping them find additional materials through Google Book Search. Please do not remove it.

+ *Keep it legal* Whatever your use, remember that you are responsible for ensuring that what you are doing is legal. Do not assume that just because we believe a book is in the public domain for users in the United States, that the work is also in the public domain for users in other countries. Whether a book is still in copyright varies from country to country, and we can't offer guidance on whether any specific use of any specific book is allowed. Please do not assume that a book's appearance in Google Book Search means it can be used in any manner anywhere in the world. Copyright infringement liability can be quite severe.

About Google Book Search

Google's mission is to organize the world's information and to make it universally accessible and useful. Google Book Search helps readers discover the world's books while helping authors and publishers reach new audiences. You can search through the full text of this book on the web at `http://books.google.com/`

MILITARY HANDBOOKS

EDITED BY

LIEUT.-COL. C. B. BRACKENBURY

MILITARY SKETCHING AND RECONNAISSANCE

LIEUT.-COL. F. J. HUTCHISON

AND

CAPTAIN K. G. MacGREGOR


600022864Q

MILITARY HANDBOOKS FOR REGIMENTAL OFFICERS

VOL. I.

MILITARY SKETCHING AND RECONNAISSANCE

In preparation, uniform with the present Volume.

THE

ELEMENTS OF MODERN TACTICS.

BY MAJOR WILKINSON SHAW.

BEING THE SECOND VOLUME OF

Military Handbooks for Regimental Officers.

LONDON: C. KEGAN PAUL & CO.

MILITARY SKETCHING

AND

RECONNAISSANCE

BY

LIEUT.-COLONEL F. J. HUTCHISON

H.P. LATE 64TH REGT.
GARRISON INSTRUCTOR, WESTERN DISTRICT

AND

CAPTAIN H. G. MACGREGOR

29TH REGT.
LATE GARRISON INSTRUCTOR, HOME DISTRICT

WITH FIFTEEN PLATES

BEING THE FIRST VOLUME OF

Military Handbooks for Regimental Officers

EDITED BY

LIEUT.-COL. C. B. BRACKENBURY, R.A., A.A.G.

SUPERINTENDING INSPECTOR OF GARRISON INSTRUCTION

BODLEIAN
MAY 1879

LONDON

C. KEGAN PAUL & CO., 1 PATERNOSTER SQUARE

1878

231. e. 222.

(*The rights of translation and of reproduction are reserved*)

PREFACE.

NOT many years ago the officers of the English army might be roughly divided into two classes—the scientific and the non-scientific. The former were deeply versed in mathematics and physical sciences, capable of making accurate maps and of designing or attacking a permanent fortress. They had, however, no knowledge of tactics, except such as had come from their own voluntary studies. On the other hand, officers of the non-scientific class were entirely deficient in knowledge of science, incapable for the most part of even reading a military map, and uninformed on the subject of practical tactics, which was, strangely, regarded as a 'theoretical' study, and therefore condemned.

Thus it comes about that books intended to instruct officers in 'Military Sketching' are, as a rule, suitable rather for surveyors and map-makers than for practical sketches in the field, and contain little or no information on the art of 'reconnaissance of ground,' which should go hand in hand with military sketching. Similarly a whole library of books might be found to

tell by what great fault the Prussians lost the battle of Kolin, or by what wisdom won that of Königgrätz; but there was no work in existence explaining to an English lieutenant how he should lead his handful of men to the best advantage, or even to a colonel how to dispose his battalion so as to deserve success, if not to command it. Officers who were desirous of learning just so much of the military art as is requisite to complete their practical efficiency in the field, without entering deeply into studies which, however valuable, are not necessary except for a few, have had little assistance towards self-education.

It has, however, lately been understood that, on the one hand, a knowledge of drill and interior economy of regiments is insufficient to enable an officer to fulfil his whole duty to his Sovereign and his country in the field; while, on the other hand, a deep knowledge of permanent fortification, the scientific part of artillery, accurate surveying, and the tactics of divisions or armies, are only necessary for a limited number of officers, specially trained.

Strongly impressed by the lack of really elementary books, the Editor appealed to certain garrison instructors to assist him in supplying the want which was felt, not only by students but by the instructors themselves. It is needless to say that any call for special work, when the good purpose of it is clear, always meets with hearty acquiescence in the English army. By far the greater part of the labour has fallen upon the officers who consented to undertake the task.

To them is the chief credit due, and the Editor trusts that their work may receive the recognition which it deserves.

It is to be hoped that the Handbooks, of which this is the first, may prove useful to the Militia and Volunteers as well as to the Regular Army. The Editor can promise them that if they will patiently work through this volume, and one which will shortly follow, containing those details of elementary tactics which, while of the greatest value, are not to be found in ordinary books on the subject, they will acquire almost a new sense. They will see features of country with a military eye, just as a painter sees them with an artist's eye, and will gain a new and peculiar pleasure as incomprehensible by the outer world as that of the artist who sees—not dull fields—but lovely pictures in the flattest series of meadows.

In view of future editions, the Editor will feel much indebted for any criticisms or suggestions which may be sent to him.

C. B. BRACKENBURY.

WOODLANDS,
YORK TOWN,
FARNBORO' STATION.

CONTENTS.

PART I.

MILITARY SKETCHING.

SECTION		PAGE
I.	Definition and Object of Military Sketching	1
II.	Instruments used	2
III.	Measurement of Distances	6
IV.	Scales	7
V.	Conventional Signs	11
VI.	Triangulation	12
VII.	Traversing and Details	20
VIII.	Sketching with Field Book	25
IX.	Features of Ground	28
X.	Representation of Hilly Ground	30
XI.	Practical Contouring	43
XII.	Execution and Finishing of the Sketch	49
XIII.	Shading	51
XIV.	Drawing Sections of Ground	54
XV.	Copying, reducing, and enlarging Maps	56
XVI.	Sketching without Instruments	59
XVII.	Use of Aneroid Barometer in Contouring	63
XVIII.	Heights, Distances, and Areas	65

PART II.

RECONNAISSANCE.

SECTION		PAGE
	INTRODUCTORY	71
I.	TOPOGRAPHICAL RECONNAISSANCES	72
II.	RECONNAISSANCE OF A ROAD	76
III.	THE REPORT	77
IV.	RECONNAISSANCE OF A RIVER	85
V.	,, ,, WOOD	92
VI.	,, ,, RAILWAY	93
VII.	,, ,, VILLAGES	97
VIII.	,, ,, CAMPING GROUND	98
IX.	,, ,, BIVOUAC GROUND	102
X.	,, ,, MOUNTAINS	102
XI.	,, ,, SMALL POST	103
XII.	,, ,, POSITION	105
XIII.	ARRANGEMENTS FOR A CONCERTED RECONNAISSANCE OF A DISTRICT	105
XIV.	COAST RECONNAISSANCE	106
XV.	NOTES ON ESTIMATION OF SUPPLIES	108
XVI.	COURSE OF FIELD SKETCHING AND RECONNAISSANCE OF GROUND FOR NON-COMMISSIONED OFFICERS OF INFANTRY, CAVALRY, AND ARTILLERY	109

PART I.

MILITARY SKETCHING.

SECTION I.

DEFINITION AND OBJECT OF MILITARY SKETCHING.

A 'MILITARY SKETCH' is a map or plan of ground, made expressly with a view to give such information as is required for military purposes.

Marches, battles, and other operations of war, cannot be safely planned nor executed without knowledge of the ground on which they are to take place. Ordinary maps of the country, though most useful, only supply this need in part. They are on too small a scale to show the necessary details, and, not having been made for military purposes, may omit essential military features. Moreover, new roads may have been made, and other changes taken place since they were published.

Plans of the ground must therefore be made, and hence it is essential that an officer should be capable of making a military sketch. The object of Part I. of the present manual is to assist officers who are under instruction, and to enable those who have not the opportunity of being instructed, to master the mechanical part of military sketching. Its practical application to the purposes of war will form the subject of Part II.

The processes employed in military sketching are essentially the same as those used in ordinary surveying; but the means employed being less perfect, and the time available

being always limited, the same minute accuracy is not attainable. Nor is it required. Details of no military importance are omitted; distances and dimensions often judged instead of being measured; and time economised in various other ways which experience will suggest; care being, however, taken to preserve such correctness in essentials, that the sketch shall be practically serviceable for the purpose it is intended to fulfil.

SECTION II.

INSTRUMENTS USED.

The main points to be considered in the choice of instruments for military sketching are simplicity and portability. Those generally used are the Prismatic Compass and six-inch Protractor, which fulfil both conditions, and are sufficient for all that has to be done; nothing being necessary beyond the means of measuring angles and distances on the ground, and of laying them down on paper, or 'plotting' them as it is called.

The Prismatic Compass.—The reader should have a compass in his hand while studying the following description.

The Prismatic Compass is founded on the well-known property of the magnetic needle; viz., that, when balanced on its centre, and allowed to move round freely, it will come to rest pointing nearly due north.

The construction of the instrument is as follows:

A shallow circular metal box has a short upright pin fixed in the centre of its bottom. On this pin is balanced a magnetic needle. To one side of the rim of the box is fixed a sight vane, with a horse-hair down its centre, and to the opposite side a glass prism, with a slit above it, through which the horse-hair can be seen. The vane and prism are so placed, that a line from the middle of the slit to the horse-hair would pass exactly over the centre of the circle, and both are made to turn down on a hinge, so as to allow the compass to be put into a leather case. The magnetic needle is fixed to a circular card, (or sometimes a metal ring), which

it carries with it when it moves round on the point of the upright pin. To prevent the point of the pin from being blunted by the constant friction of the needle turning on it, a small lever is arranged, so that, when the sight vane is turned down, it presses on one end of it, and causes the other end to lift the needle off its bearing. In the outer rim of the box, under the sight vane, is a small knob, which, being pressed, forces a spring against the edge of the card, the use of this being to check the swinging to and fro, which often takes place before the card settles into its proper position. A glass is fitted into the rim of the box to protect the card, and the whole is protected by a metal cover. The edge of the card is divided into 360 degrees, numbered from 0° round to the right.

To use the compass, (which is sometimes put on a tripod stand, but more usually held in the hand), the prism and sight vane are turned up, the eye placed at the slit, and the horse-hair aligned on the object which is to be observed. Care must be taken to hold the compass level, so that the card may swing freely, for if tilted up, so that the edge of the card touches the glass, the needle will be checked, and unable to move round to its proper position. If the card swing violently to and fro, the spring may be used to check it, the pressure being applied when the card is at about the middle of its swing. When the card has settled, the number of the degree which appears * to be cut by the hair, is read. If there is any difficulty in seeing the numbers, the prism may be moved up, by means of the sliding-bar to which it is fixed, till a focus to suit the eye is found.

The number thus read is the 'magnetic bearing' of the object observed; that is, it is the number of degrees in the angle between two lines drawn from the position of the observer, one to the object observed, the other in the direction of north and south as shown by the needle. This last-

* This is not really the number cut by the hair, but the number directly under the eye, reflected by the prism. On account of this arrangement, the numbers on the card are reversed with regard to the needle, *i.e.* the 180° is at the north, and the 360° at the south end of it.

named line is called the 'magnetic meridian' of the observer.

As the circle is divided into 360 degrees, numbered from 0°, which is at the north, round to the right, it follows that if the number read be between 0° and 90°, the direction of the object will be between N. and E. from the observer; if between 90° and 180°, it will be between E. and S.; if be tween 190° and 270°, between S. and W.; and if between 270° and 360°, between W. and N. (Plate I., *fig.* 1).

The magnetic needle does not point exactly to the true north, but varies in direction in different countries. Hence a line drawn through any point in the direction of true north and south, (*i.e.* the true meridian of that point), will not coincide exactly with its magnetic meridian, but will make a certain angle with it. This angle is called the 'variation' or 'deviation' of the compass. In England, at present, the deviation is a little over 19° to the west (Plate I., *fig.* 2). It changes from year to year. In 1663 the needle pointed true north. In 1818 it reached its greatest westerly deviation, 24° 41′. Since then it has been returning towards true north at the rate of about 6′ per year. In general, the deviation is to the west in Europe and Africa, and to the east in Asia and America.*

The compass needle is affected by the neighbourhood of iron. Care must be taken therefore not to stand near iron railing, &c., while observing bearings.

In windy weather, it is difficult, sometimes impossible, to hold the compass steady enough. To meet this there are various expedients, such as to sit on the ground and steady the elbows on the knees, or to lie down flat and rest the elbows on the ground, or stand the compass on a stone, or a clod.

The Protractor.—The angles observed with the com-

* The deviation may be found by taking the bearing of the pole star, when exactly above or below the third star from the tail of the Great Bear. The moment of its being so can be ascertained by means of a plumb line. If the bearing is between 0° and 90°, the deviation is westerly; if between 270° and 360°, it is easterly.

pass are laid down on paper by means of the surveying Protractor, which is an instrument of boxwood or ivory, rectangular in shape, 6 inches long, by about $1\frac{3}{4}$ broad.

Its edge, round three of the sides, is divided into 180 degrees. These three sides represent the circumference of a semicircle, the fourth, (which we may call the inner side to distinguish it), representing the diameter. In the middle of this side is a mark denoting the centre. The degree divisions round the three sides have two sets of numbers, the outer series, 1 to 180, numbered round to the right, and the inner, 180 to 360, numbered the same way. Thus, for every number on the compass card, there is a corresponding one on the protractor. The inner side has a scale of tens and hundreds of yards along its edge. Across the face of the protractor are several lines at equal distances from one another, at right angles to the long sides.

The paper used for plotting the angles on is ruled with a number of parallel lines, at unequal distances from one another, called east and west lines.

Suppose the point O (Plate I., *fig.* 3) to represent on the paper a spot from which angles have been observed. The protractor is laid on the paper, with its centre mark at O, and adjusted so that any one of the lines across it may coincide with one of the lines on the paper. As the former are at equal, and the latter at unequal, distances apart, one, if not more, lines, will generally be found to coincide exactly. If none do so, there will certainly be some so near it that the eye can judge if they are exactly parallel, which answers the same purpose, but the centre point of the protractor must not be moved away from O. If the bearing to be plotted is between 0° and 180°, the protractor is placed to the right of O (Plate I., *fig.* 3); if between 180° and 360°, to the left of it (Plate I., *fig.* 4).

When the protractor is adjusted in this way, the inner edge is supposed to lie in the same direction as the needle of the compass—that is, magnetic north and south; and it therefore represents the magnetic meridian of O. The lines across the paper, being at right angles to it, will lie east and

west by the compass, that is, in the direction of the line across the card from 90° to 270° ; and any number on the edge of the protractor will lie in the same direction from O as the corresponding number on the compass card.

To lay down any bearing, a dot is made at the proper number on the edge, the outer set of numbers being used if the protractor is to the right of O, and the inner set if to the left of it. For exactness sake, the dot should be very small, and made as close to the edge of the protractor as possible. To do this the pencil must have a fine point, and be held upright. The protractor is then taken up, and a line ruled with it from O through the dot. This line gives the true direction from O of the point whose bearing has been taken.

SECTION III.

MEASUREMENT OF DISTANCES.

Where accurate measurements are required, 'Gunter's chain' may be used. It is 22 yards long, so that 10 chains = 1 furlong, 80 chains = 1 mile. It is divided into 100 links, each 7·92 inches long. Two men are required to use the chain. The leader, who has ten iron arrows to start with, moves on till the chain is stretched, and plants an arrow to mark the spot. He does the same each time he stretches the chain. The follower picks up the arrows, one by one, as he comes to the points where they have been left. When he has all ten he returns them to the leader, who notes the distance measured.

In military sketching, distances are almost always measured by pacing. The sketcher must know the exact length of his pace, and take care to pace uniformly. It is an advantage to pace yards, as it saves trouble and chance of errors in calculation. If the regulation pace of 30 inches is used, the number of yards is found by deducting $\frac{1}{8}$ from the number of paces.

In all plans, the distances shown between the different

points are horizontal distances. On level ground, these are found at once by simple measurement, but, where the ground is uneven, the distance between any two points, measured along the surface, up and down the slopes, will of course be greater than the true horizontal distance. The steeper the slope the larger will the difference be. On a slope of 5° it will only be about 14 inches in 100 yards; at 10° it will be nearly 55 inches; at 15°, 3½ yards; at 20°, 6 yards; and at 25°, 9½ yards in 100.

On slopes of 15° and upwards, however, little reliance can be placed on pacing, and on such slopes, (as well as on the less steep ones when the line paced is a long one), the distances measured should be frequently checked by methods which will be explained in a later section.

SECTION IV.

SCALES.

All maps or plans must be drawn to scale; that is to say, there must be a fixed proportion between distances on the ground and the representations of them on paper. This is necessary, in order that the person using the plan may be able to ascertain, by measurement on the paper, any distance on the actual ground that he may require to know.

This proportion, or scale, must be decided on before the drawing is commenced, and adhered to throughout.

There are two ways of expressing it. One by comparing two units of length with one another; as, for example, when we say that a map is on a scale of one inch to a mile, we mean that a mile length of road is represented by one inch, the width of a river a quarter of a mile wide by a quarter of an inch, and so on.

The other way is by means of a fraction, (called the 'representative fraction'), which expresses the proportion between the plan and the ground in figures. Thus, to say that a plan is on a scale of $\frac{1}{63360}$, means that every line in the

plan is $\frac{1}{63360}$ the length of the line on the ground which it represents. This means the same thing as a scale of one inch to a mile, as there are 63,360 inches in a mile, and every length of an inch on the paper represents a length of 63,360 inches, or one mile, on the ground.

The first of these methods conveys more readily to the mind the idea of the scale of a map, but the second has some advantages. We can measure distances on any foreign map, if the representative fraction is given, though we may not know the measures of the country.

For instance, if we have a French map on a scale of $\frac{1}{80000}$, we know that one inch represents 30,000 inches—that is, 2,500 feet—therefore $\frac{1}{10}$ of an inch will represent 250, and $\frac{1}{100}$ of an inch 25 feet, and we can draw a scale of English measures for the map.

This example shows that it is easy to convert the second method of expressing scales into the first. The opposite process is equally simple.

For instance, given a scale of 2 inches to a furlong, to find the representative fraction. We have only to write the two in the form of a fraction, to express the furlong in inches, and to reduce the fraction to its lowest terms. Thus

$$\frac{2 \text{ inches}}{220 \text{ yards}} = \frac{2}{220 \times 36} = \frac{2}{7920} = \frac{1}{3960}.$$

Therefore $\frac{1}{3960}$ is the representative fraction of a scale of 2 inches to a furlong.

In deciding on a scale for a plan, the main question to consider is, what amount of detail is required to be shown in the drawing? At one inch to a mile, a dimension of 10 yards would be represented by $\frac{1}{176}$ of an inch, which is too small to be appreciated by the eye, or measured by any scale. We must, therefore, use a larger scale, if the sketch is required to show objects of that size. At 6 inches to a mile, a length of 10 yards is represented by about $\frac{1}{29}$ of an inch, a dimension which we can recognise and measure. This is the scale generally used for sketches of camp grounds and military positions.

Another point, however, has to be taken into account, viz. the size of the paper on which the sketch is to be made. This consideration may compel us to work on a smaller scale than would otherwise be desirable. For instance, if 15 miles of road have to be sketched, and it is done at 6 inches to a mile, the sketch will be 7½ feet long—a very inconvenient size. For such purposes, therefore, a smaller scale is used, 3, or 2, inches to a mile; and when a sketch embraces a large extent of country, a still smaller scale may have to be used. In such cases it is unavoidable that the dimensions of roads, rivers, &c. should be exaggerated in the drawing, and this is one, among many reasons, which make it necessary that a military sketch should be supplemented by a report.

The surveying protractor has, along its inner edge, a scale of six inches to a mile, the larger divisions representing hundreds, and the smaller ones tens, of yards. To use this in marking off distances on paper, it is laid along the line on which the distance is to be measured, with the 0 of the scale at the point from which we have to measure. The hundreds and tens are counted off, any fraction of 10 yards is judged by the eye, and a dot is made with the pencil at the point so found. In doing this, as in plotting angles, the point of the pencil must be very fine, and the dot must be made close to the edge of the scale, the pencil being kept upright. Unless this is done the distance cannot be marked off very accurately.

A sketcher may happen not to be provided with this 6-inch scale, or may be required to work on any other scale. He ought, therefore, to know how to make a scale for himself, which is easily done, provided that any scale of inches, divided into hundredths or fiftieths, is obtainable.

A single example will suffice to show how this is done.

Suppose a scale of 4 inches to a mile is required. We might draw a line 4 inches long to represent a mile, or 1,760 yards; but the dividing it into hundreds of yards would be awkward, as it would have to be divided into 17 parts and $\frac{6}{10}$ of a part.

But if 4 inches represent 1,760 yards, evidently 2,000 yards will be represented by a line of some length between

4 and 5 inches. This will be a convenient line both to draw and to divide, if we can find the exact length of it. This is done by simple rule of three, thus :

Yards. Yards. Inches.
1760 : 2000 :: 4 : length required.

Working this out, we find the length to be 4·54 inches; therefore, if we take off $4\frac{54}{100}$ inches from the common diagonal scale, or $4\frac{27}{50}$ from the Marquois scale of fiftieths of an inch, we have a line representing 2,000 yards on a scale of 4 inches to a mile. Dividing this into 20 equal parts, we have hundreds of yards, and again dividing one of these into 10, we have tens of yards.

The dividing of a given line into any number of equal parts is done as follows (Plate I., *fig.* 4) :

Let AB be the line to be divided. From A draw another line AC, making an angle of about 30° with AB. With a pair of compasses, opened to any convenient length, prick off from A along AC as many equal parts, (marked 1 · 2 · 3 as in the figure), as AB has to be divided into. Seven is the number shown in the figure, but the method may be used for any number. Join 7 to B, and through the points 6, 5, 4, 3, 2, 1, draw lines parallel to 7B. These lines will divide AB into the required number of equal parts. In exactly the same way one of these parts may be subdivided into any required number of equal parts.

The usual way of drawing a scale for a military sketch is as follows (Plate I., *fig.* 5) : Draw, in pencil, three parallel lines, about $\frac{1}{16}$ of an inch apart. Measure off on the lower line the total length the scale is to be, and divide it into hundreds of yards in the way just described. Then subdivide the left-hand division into tens of yards. Through the points of division draw perpendiculars, those marking the hundreds reaching as far as the top line, and those marking the tens as far as the middle line only. This is all done in pencil. In inking in, the bottom line is drawn rather thick, the middle line and the divisions thin, and the top line rubbed out, its only use being to keep the perpendiculars the same length, for neatness.

The divisions are numbered as shown in the figure, the 0 being on the right of the tens; a more convenient arrangement than putting it on the left of the whole.

Lastly, the designation of the scale is written over it, either in words, or the representative fraction.

SECTION V.

CONVENTIONAL SIGNS.

The execution of a military sketch may be divided into two distinct parts, viz.: 1st, the representation of the details; 2nd, the representation of the shape of the ground. They will be described separately in the order in which they are here placed, which, in fact, is the order in which they are usually executed. To carry out both at the same time requires considerable skill.

The first process consists in the delineation of every object on the ground which can affect the movements of troops, whether as communications or obstacles, or as affording facilities for attack or defence; for instance, roads, rivers, woods, and marshes; towns, villages, and houses; walls, hedges, &c. The nature of the surface of the ground has also to be shown, whether heathy, rocky, &c.

The way of finding the positions and dimensions of these objects will be explained hereafter. At present we are only concerned with the manner of representing them on paper.

To draw pictures of them all would be impracticable on the small scale of a military sketch. They must, therefore, be represented by signs; and, as some inconvenience would arise from leaving to each individual the choice of the signs he would use for particular objects, a set of 'Conventional Signs' is laid down to be used for all military sketches. Plate III. contains the most useful of these; that is, those which are most commonly required.*

* The complete set can be obtained from the Intelligence Branch of the Quarter-Master-General's Department.

The beginner should practise drawing these, at first copying, and afterwards from memory, so as to become familiar with them.

In general, in a military sketch, objects are shown as they would appear to the eye looking vertically down on them from above. There are, however, some few deviations from this principle. In drawing rocks and trees, the light is supposed to come from the upper left-hand corner of the paper, and the sides furthest from the light, *i.e.* the lower and right-hand sides, are drawn darker than the others. In the case of houses also, the lines on those sides are drawn slightly thicker. In drawing rivers, the line representing the bank nearest to the light is the darker of the two, as that is the bank which would throw a shadow on the water. It is customary also to draw the side of a road furthest from the light a little thicker than the other.

Fenced roads are shown by continuous, and unfenced by dotted, lines. In drawing the sides of the road, the draftsman should turn the paper so as to draw towards himself, and draw the side which is to his left first. It is easier in this way to keep the sides parallel.

Roads are coloured with burnt sienna. It is usual to make main roads of a darker shade than cross-country roads, and to leave unmetalled roads uncoloured.

Woods may be shown by a light flat shade of green, (gamboge and Prussian blue mixed), instead of, or in addition to, drawing the trees. Or they may be represented by sketching the boundaries, and printing the word 'Wood' inside.

Crimson lake is used for colouring masonry, buildings, or bridges; and cobalt, or Prussian blue, for water.

SECTION VI.

TRIANGULATION.

When we have taken the bearing of any object, we know its direction from the spot on which we stand, and if we take a point on the paper to represent that spot, and plot

from it the bearing, we know the direction of the object on the paper; that is, we know that it lies somewhere along the line we have drawn. But, before we can put it down in its proper place, we must find out where it lies on that line, by measuring the distance on the ground, and laying it down on the paper from our scale. We might then return to our starting point, and find, in the same way, the position of a second object, and so on for any number.

But this would be a long process, and there would most probably be obstacles in the way of our measuring some of the distances correctly. We can gain our object more quickly, and at the same time more accurately, in the following way:

Suppose A (Plate II., *fig.* 7) to be our starting point, and that, by taking the bearing and measuring the distance of B from A, we have got B correctly placed on the paper. Then, if we take from A the bearing of a third point C, and plot it, we have a line A*a*, on which C must lie. By doing the same from B, we find a second line B*b*, on which C must also be. Therefore C must be at the point where A*a* and B*b* cross one another, or in other words the position of C is determined by the intersection of bearings from A and B. In the same way we can find the positions of any number of other points, that are visible from both A and B, without measuring any other distance than that from A to B.

The process of fixing points in this way is called 'Triangulation,' and the measured line is called the 'Base.'

As any error in the base, whether as regards bearing or length, will evidently affect the whole work, care must be taken to lay it down as correctly as the means at command will admit of. A line should be chosen for the base, if possible, where the ground is fairly level, and free from obstacles; the length should be paced more than once, and the bearing taken from both ends, viz. that of B from A, and that of A from B. It is desirable that the ends of the base should be well marked points, visible from a distance, and easy to find, in case it should be necessary to return there, at any future stage of the work, to correct an error, or for any other purpose.

When the position of any point has been fixed in this way, it may be used as a station from which to take the bearings of other points. For example, if D (Plate II., *fig.* 7) is a point whose position has to be found, and which can be seen from B and C; but not from A, we can fix it by bearings from B and C, and this process may be extended, so as to embrace the whole of the ground to be sketched within a set of triangles, the angles of which are marked by the most prominent objects, placed in their true positions, and forming so many starting points to work from in sketching the details within the triangles, which is done by methods to be described in the next section.

These triangles ought to be as nearly equilateral as possible, so that the intersections which determine the several points may be neither very acute nor very obtuse.

There are two reasons for this. One is that when two lines cut each other at a very acute, or very obtuse, angle, it is not easy to determine the exact point of intersection, while, if the angle is anywhere near a right angle, the point is quite distinct (Plate II., *fig.* 8, *a b c*). The other reason is that, the further the angle is from a right angle, the greater will be the difference made in the position of the point by a small error, either in observing or plotting the bearing (Plate II., *fig.* 8, *a b c*).

If any point is very distant in proportion to the length of the base, the intersection of the bearings which fix it must necessarily be acute (Plate II., *fig.* 7, *a*). For this reason the base ought to be near the centre of the ground, and of a length proportioned to its extent. For small sketches of one or two square miles, the base should be about one-third the distance across the ground.

It may be impossible, in broken country, to find a good base of such a length. In this case the following expedient may often be used with advantage: Suppose A and B (Plate II., *fig.* 8) to be two points, suitable in other respects for the ends of the base, but that obstacles between them prevent direct measurement of the distance. A shorter line C D may be found, somewhere between A and B, which

can be measured by pacing, and from the ends of which A and B can be fixed. These points can then be used, as if AB had been a regularly measured base.

Though the intersection of two bearings is sufficient to fix the position of any point, still there is always liability to error, and it is often useful to apply some test of the correctness of the work. This may be done by taking 'check bearings,' as in the following example (Plate II., *fig.* 10):

With AB as a base, the points C, D, E have been fixed. Then, if from C the bearings of D and E are taken, the lines, when plotted, will pass exactly through those points if the work is correct. If they do not do so, there has been some error.

These check angles are especially useful to verify points which have unavoidably been fixed by intersections too acute or obtuse to be quite reliable; and many other cases occur in which they are of use.

We have seen how to find, on our paper, the position of a point at a distance from us by taking its bearings from two known points. We must now consider the opposite case, viz. when we are ourselves standing at the unknown point, and want to find its place on the paper. We can do so, provided we can see from it two or more of the points whose positions we have fixed.

This process is called 'Interpolation,' and is founded on the simple facts that, if A is north of B, B is south of A; if C is west of B, B is east of C; and so on with regard to any two opposite directions on the compass.

The way of proceeding is as follows: We are standing somewhere, but do not know exactly where, between the points A, B, and C (Plate II., *fig.* 11), whose positions we know, and all of which we can see. Taking the bearing of B, we find it to be 60°. If we plot this bearing from B, and prolong the line backwards, we have a line B*b*, passing through B, and having a bearing of 60°. We must be somewhere on this line, or B could not bear 60° from where we are. Next we take the bearing of A, say 330°, plot it, and prolong the line backwards as before. This gives us a line

A*a*, bearing 330°, and, for the reason already given, we must be somewhere on this line. We must, therefore, be at X, the point where these two lines cross.

The rule given before, that acute and obtuse intersections are to be avoided, holds good here also, and for the same reasons. We must, therefore, if we can, choose our points, so that the intersection of their bearings may be near a right angle. If the intersection is not a good one, or if we wish, for any other reason, to test its correctness, we can do so by a check bearing, provided we can see a third known point. If, in addition to the bearings of A and B, we plot that of C in the same way, the latter will, if the work is correct, pass through the intersection of the other two.

In practice, instead of plotting the angles in the manner shown above, (which has been employed in order to make the thing clear to the learner), it is more convenient to plot them backwards at once, by reversing the protractor, *i.e.* laying it to the left for angles from 0° to 180°, and to the right for angles from 180° to 360° ; the result is the same, and the drawing of unnecessarily long lines is avoided.

The cases in which interpolation is useful are numerous. For instance, in making a triangulation there may be points which it is desirable to fix, but which can only be seen from one of our known stations. By moving about the ground, a spot may be found from which they are visible. Having fixed the position of this spot by interpolation, we may use it as a station from which to take a second bearing to the points in question.

Again, after the triangulation is completed, there may be reason, at any time during the work of sketching the details, for suspecting that some error has crept in. The true position being found by interpolation, the error, if any exists, can be discovered and corrected.

A few practical hints on the manner of executing a triangulation may be of use to the beginner.

In the first place, the requisites of a good base may be recapitulated.

It should be level and free from obstructions.

Most of the principal points on the ground should be visible from the ends.

The ends should be marked by easily recognisable points.

It should be centrally situated, and of a length proportioned to the size of the ground.

The sketcher, stationing himself at the end of the base at which he intends to begin work, takes the bearing of the other end, and paces the distance to it. From it he takes the bearing of the first end, and paces back. The two bearings, if carefully taken, are sure to agree. If they do not, there must have been some accidental error in one of them, which can be checked at once by taking the bearing again. Nor can there be any material discrepancy between the two measurements if the pacing has been done with care. If they do differ, the distance should be paced a third time, when it becomes necessary in the course of the work to go to the other end of the base again. If two out of the three pacings agree, they may be taken as giving the correct length. If all three differ slightly, the mean may be taken.

The next step is to observe all the bearings which it is intended to take from the present station. It is a good plan to write down in the corner of the sketching paper, or in a note book, the names of the different objects, before beginning to use the compass, placing them in the order in which they come, looking from left to right or from right to left.

When several angles are to be taken from the same point, it is an advantage if a rest can be contrived for the compass, so that it can be turned on each point in succession, and the bearing of one written down while the card is settling for the next. If no rest can be found, and the compass has to be held in the hand, two or three bearings may be taken at once, without removing the compass from the eye, by turning it slowly from one point to another. This saves much of the time that is lost by the swinging of the card before it settles; but care must be taken not to observe more angles at a time than the memory can retain distinctly, before writing them down.

It is a saving of time to take all the bearings at once, before plotting any, for, by plotting all of them at once, one adjustment of the protractor for angles under 180°, and one for those over 180°, are sufficient, the number of degrees in each being lightly written in pencil close to the dot.

Lines are then drawn from the end of the base through the dots, and in doing this it is useful to estimate roughly the distance of each point, so that the line may be drawn at once long enough to pass through it; greater correctness is obtained in this way than if the line is drawn too short at first and then prolonged.

As each line is drawn, the name of the object to which it belongs is lightly written in pencil along it, so as to avoid confusion among a number of lines (Plate II., *fig.* 12).

When this work is completed at one end of the base, the sketcher proceeds to the other end, and from thence takes the bearings of the several objects in the same manner as before. As each point is fixed by the intersection of the bearings, a small ring is drawn round it, and its name written close to it. The names written along the lines, and the superfluous ends of the lines, beyond the intersections, are then rubbed out. It is always an advantage to keep the paper as clear as possible, by rubbing out all dots, lines, &c., when no longer required.

When the work at the base is finished, the triangulation is completed by visiting such of the points, just fixed, as it may be necessary to use as stations, for the purpose either of fixing, by a second bearing, any object that has only been seen from one end of the base, or of taking bearings to new points which it is desirable to fix, or of verifying, by check bearings, any intersections of the correctness of which there may be a doubt.

It is often useful to fix on the paper the positions of conspicuous points which are near, though not actually on, the ground which is to be sketched. Such points may be useful for interpolations when working near the boundary of the ground; and when, as is often the case, a large piece of ground is portioned out to be done by different individuals,

the occurrence of some of the same points on two sketches will facilitate the piecing of them together.

An example of a triangulation is given below. The plotting of it is shown in Plate IV., but the learner will find it useful practice to plot it for himself, observing the rules given above, as far as they are applicable.

Example of a Triangulation.

Angles observed from A (a tree in a field).

E (top of church steeple) . . .	20° 30′.
D (guide post at cross roads) . .	97°.
C (chimney of house)	129°.
B (stile at bend of road) . . .	161°.
K (shed at corner of field) . . .	175°.
F (vane on top of house) . . .	200°.
H (signal post on railway) . . .	328°.

The distance from A to B, being twice paced, is found to be 690 yards.

Angles observed from B.

E	3° 30′.
C	27° 30′.
D	54°.
F	260°.
G (telegraph post)	289°.
K	325°.
A	341°.

It will be observed in the above:

1st. That the bearings of B from A, and of A from B, agree.

2nd. That the positions of the following points are determined, viz. E. D. C. F. K., and that all the intersections are good ones, except that for E, which is rather acute.

3rd. That the positions of H and G are not determined, only one bearing having been taken to each, as neither of them can be seen from both ends of the base.

To verify the position of E, its bearing is taken from D, and found to be 328°. This passes through the intersec-

tion of the bearings from A and B. E is therefore taken to be correctly fixed.

By moving about the ground, a point X is found, on the edge of a railway cutting, from which both H and G can be seen. A and F are also visible. The position of X can therefore be found by an interpolation, and it can be used as a station for fixing H and G.

Interpolation to find X.
Bearing of A from X 97°.
„ „ F „ X 146°.
Angles observed from X.
H 30°.
G 227°.

All the points are now fixed, but it is considered advisable to test the correctness of the whole work by a check bearing.

Accordingly, from H, the bearing of E is taken and found to be 81°, which passes exactly through the position of E as previously found. The correctness of the work may therefore be considered to be established.

A plot of the above triangulation is given on Plate IV.

SECTION VII.

TRAVERSING AND DETAILS.

The triangulation being completed, the next step is to put in the details within the triangles. Of these, the roads generally claim attention first, both on account of their importance, and because, in the course of sketching them, so much of the rest gets worked in, that often little or nothing remains to be done to complete this part of the sketch.

Roads are sketched by a process called traversing, which is very simple.

The sketcher chooses a convenient spot to start from, (either one of the points fixed by the triangulation, or one

which he can find by interpolation), and from it takes a bearing forward in the direction he means to work in. He plots the bearing, paces the distance, and marks the point on his paper, and then uses it as a fresh station, from which to take a forward bearing. Proceeding as before, he gets a third station on his paper, and continues to work in the same way, till he reaches the boundary of his sketch, or closes on some point in the triangulation, which he can then use as a fresh starting point, to commence work in another direction.

While pacing from one station to another, the sides of the road are drawn, the proper width being given to it according to scale. It is not at all necessary that each forward bearing should be taken along the middle of the road. On the contrary, much time will be saved, without any loss of correctness, by taking the bearing of the furthest point that the bends of the road will allow to be seen. Care must, however, be taken to pace on that point in a straight line. The sides of the road will be at varying distances from this line, (which may even touch one or both of them at different points), and must be drawn accordingly, the distance being judged by the eye.

The sketcher also marks down any cross road or lane, as he comes to it, taking its direction with the compass, and drawing the sides for a short distance, so that he can return to the spot afterwards, and traverse the cross road if he should have occasion to do so.

Any stream crossing the road is treated in the same way, bearings being taken up and down, and an arrow drawn to show the direction of the current. The bridge, if any, is also drawn.

In a similar manner any railways, or canals, which the road crosses, are shown, and hedges, boundaries of woods, &c., are sketched in.

Houses and other buildings are also drawn in their proper places, those immediately on the road being put in as they are passed. Those which are at a short distance from the road, and accessible, may be put in as follows : The sketcher

when exactly opposite to the building, halts, and paces the distance to it at right angles to the line on which he is advancing. He should make a mark in the road where he leaves it, so that he may return to the exact spot to continue his traverse.

A line measured in this way, perpendicular to the line of direction, is called an 'offset.'

In military sketching, the right angle of the offset is judged by eye, and not measured with any instrument, and the length also, when not great, is often judged instead of being paced.

Buildings that are too far off to be put in by offsets, should be fixed by intersections of bearings taken from convenient points (Plate V., *fig.* 13).

In pacing along the road, the sketcher must always be careful to march direct on the point whose bearing he has taken. If he does so, and his pacing is correct, the next station will be rightly placed, and any error he may make in sketching in the sides of the road cannot be great, whereas, if he deviate from the true line, the station will be wrongly placed, and this will materially affect the correctness of the whole work.

This line of direction, from station to station, is generally drawn for convenience in measuring distances along it, and offsets from it, but it is rubbed out when the work is inked in. It should, therefore, be drawn very lightly in the first instance, not only in order that it may be completely obliterated afterwards, but also because, for the sake of distinctness in the drawing, any lines of this sort, required only for temporary purposes, should be made as inconspicuous as possible. For the same reason, on reaching a station, the superfluous length of line beyond it should be rubbed out at once.

When offsets are taken, the perpendiculars are not drawn at all, but the points to which they are taken are marked down at once, by measuring the distance from the scale.

Traversing is applicable to rivers, to borders of woods and marshes, and to boundaries of any kind, as well as to roads.

When a very irregular line, such as a stream or boundary, has to be sketched, it is advisable to take as distant points as possible on it for forward bearings, thus cutting off several bends, which can be put in by offsets (Plate V., *fig.* 14). Not only is this way more expeditious, but it is more accurate than traversing all the bends.

For example, by taking a bearing from A to B, and offsets as shown in the figure, the position of B is found correctly, and the errors in laying down the course of the curved line are likely to be small, while, if all the bends between A and B were traversed, there would probably be a considerable error in the position of the latter point.

In commencing a traverse, if any error is made in observing or plotting the bearing from the first station, or in pacing or setting off the distance from it to the second, the latter will be wrongly placed on the sketch. Consequently the third station, the correctness of which depends on the bearing taken, and distance measured, from the second, will also be wrong, and every subsequent station will, of course, be affected.

If any further mistake is made between any two stations, it will put all that come after still further out of their true places; that is, to the extent of both errors added together; and as every mistake, during the whole work, tells in the same way, the error at the end, which is an accumulation of them all, is likely to be considerable.

A certain amount of inaccuracy is unavoidable in military sketching. To say nothing of mistakes due to forgetfulness or inattention, the imperfection of the means employed makes perfect accuracy impossible.

In the angles, fractions of a degree can neither be read nor plotted. Unevenness of ground must affect pacing to some extent, nor can distances be set off exactly to a yard or two; and though each single error due to these causes may be very small, still the accumulation of them must tell.

Hence traversing, by itself, is not entirely to be relied on, and this shows the advantage of having a good triangulation to start with. The principal points on the ground having

been correctly fixed, we can ensure that no considerable error arises in the work. Either each separate portion of the traversing may be commenced and closed on known points, or, if this is impracticable, the work may be checked from time to time by bearings taken on some of them. When it is certain that the line of direction is correct—as, for example, in pacing from one known point, A, on another, B (Plate V., *fig.* 15)—it is only necessary to check the distance paced, and this can be done by one bearing, taken on a third known point, C; but where the direction has been changed several times, an interpolation on two known points is needed.

The sketcher must judge for himself when, and how often, such checks are required. As a rule, they should be applied more frequently when the pacing has been over rough ground, or up and down steep hills.

The main roads, being among the most important features in a military sketch, should be correctly drawn. Bye roads and lanes are often very tortuous, and to traverse them regularly would be very laborious. Being of less importance than the main roads, they may often be put in by more expeditious methods, such as, finding, by interpolation, the positions of the principal bends, and sketching the intermediate parts by eye. The course of a stream may be sketched in a similar manner, when obstacles interfere with pacing along the bank. Edges of marshes or creeks may be treated in the same way.

Hedges can generally be put in with sufficient accuracy, while traversing the roads, by observing the points where they branch off, and their directions, and by judging the distances of those that are parallel, or nearly so, to the road. Where a hedge forms the boundary between wood and cultivation, or cultivation and heather, &c., it is of more importance to give its position correctly, than where it merely divides one field from another, and in such cases the direction may be taken with the compass.

Watercourses are important features, (as will be seen in the sections on contouring), and should not be neglected.

Railways must of course be shown, but it is seldom necessary, nor would it be easy, to traverse them. The pacing would be difficult, and the iron would probably affect the compass. They can be traced by fixing points on them by intersections, or by offsets, or by noting where they cross the roads. Cuttings and embankments on them, and also on the roads, must not be omitted.

It is needless to enumerate all the minor details which may be met with. The various ways of finding their positions have been explained, and the sketcher must judge for himself, in each case, which will be the best method to employ.

It often occurs that a sketch of a road has to be made for several miles on end. Triangulation is impracticable here; consequently no check bearings can be taken, and reliance must be placed on the correctness of the traversing.

Often, however, means may be found of checking this. Milestones, if they exist along the road, will answer the purpose. If a map of the country is obtainable, the distances from the starting point, and from one another, of the chief landmarks, such as cross roads, villages, bridges, &c., may be measured and noted down. Or even the general outline of the road may be traced on the paper before starting, whatever may be the scale of the map, by a process which will be explained in a later section.

SECTION VIII.

SKETCHING WITH FIELD BOOK.

A military sketch is usually plotted at once on the ground, the sketcher having his drawing materials with him, and completing the work in pencil as he goes along.

There is, however, another way of working, viz. by recording the several observations, as they are made, in a book called a 'Field Book,' and plotting them at a future time.

This method is useful in certain cases, such as, when drawing materials are not at hand, or when the weather is so bad that it is impossible to draw, or where secresy in making the sketch is an object. The out-door part of the work can be done more expeditiously than by plotting it at once, though the whole takes longer to complete.

There is one disadvantage in this way of sketching. If the work is plotted at once on the ground, any great error, accidentally made, either in a bearing or distance, has a good chance of being detected by the eye, which is not the case if the observation is simply recorded. If such an error be discovered afterwards, while plotting the sketch, it will generally be necessary to revisit the ground to correct it.

Recording a triangulation in the field book is very simple, and the example given in the last section is sufficient to give an idea how it may be done. But a road traverse is more complicated, though by no means difficult, when the conventional way of keeping the field book is explained.

As a first principle, the sketcher should always allow himself plenty of room in the book, and not try to economise space by crowding the work—a common mistake with beginners, and one which generally leads to hopeless confusion in the plotting. The work should be kept as clear and distinct as possible, so that, if the necessity should arise, any other person may be able to plot it.

Any ordinary note book of convenient size may be used to record a road traverse, the only preparation required being the ruling of two parallel lines, about half an inch apart, down the middle of each page. Between these lines are written the forward bearings from station to station, and the distances paced from one to another. All offsets and bearings taken to either side are entered outside the lines, on the side to which they belong. To enable this to be done conveniently, the entries begin at the bottom of the page and work upwards, *i.e.* in the same direction as the sketcher is going.

The space between the two lines is merely for the purpose of writing the necessary figures, and does not represent

any distance on the ground. The lines representing the sides of the road are drawn outside, continuous for a fenced, and dotted for an unfenced, road (Plate V., *fig.* 16), and, if great correctness is required, their distance from the line of pacing at different points may be entered between.

In commencing a traverse, the sketcher numbers the station, and takes a bearing to the next, which he enters in the centre space, with the word 'forward' opposite to it in the margin. Any other bearing taken from here is entered in the margin on the proper side, with the name of the object.

He then paces on till he has occasion to take an offset or a bearing, when he enters in the centre column the number of yards paced, and opposite to it, in the margin, the number of degrees in the bearing, or the length of the offset, with either the name of the object, or its conventional sign.

Offsets are always measured from the line of pacing, and not from the edge of the road.

When a bearing is taken along a bye road, hedge, or stream, they are drawn instead of writing their names.

In continuing the pacing from the spot where he halted, the sketcher takes up the counting from where he left off, and does not begin at 1, 2, &c. again, so that the number of paces in the centre column is, in every case, the total number from the last station.

On reaching station 2, a line is drawn across the page, above the total number of yards; station 2 is numbered, a forward bearing taken and entered, and the work carried on as before, a fresh numbering of paces being commenced.

When the road passes cuttings, embankments, woods, marshes, &c., such changes may be noted in writing, or by the proper conventional signs.

The plotting of a traverse from the field book is done in the same way as on the ground, but when check bearings have been used to correct the work, it is advisable to plot only the stations and line of pacing from one to the other, in the first instance, and then apply the checks; for if any error is discovered by their means, there is only one line to

rub out. When the stations are all verified, we can go back to the beginning and plot the details.

An example of a page of a field book, and the plotting from it, is given in Plate V., *fig.* 16, from which the beginner may learn the conventional way of making the ordinary entries.

SECTION IX.

FEATURES OF GROUND.

The shape of ground depends mainly on the geological formation of the country. This question cannot be fully discussed here; but certain typical features may be described, which are found everywhere, and by the combination of which, in an endless variety of ways, all hilly ground is formed.

What is generally understood by a 'hill' is a piece of elevated ground, with a top of any shape, regular or irregular, from which the ground falls in all directions. When the hill is small, it is often called a 'knoll.' If the top of a hill is of considerable extent and level, or nearly so, it is called a 'plateau.' Where a hill is narrow in proportion to its length, it may be described as a 'ridge.' The top of this ridge may be level for the greater part of its length, only commencing to fall towards the ends, or it may slope downwards both ways from a point at or near its middle; or, again, it may be broken into a series of alternate rises and falls, this last being the case of most frequent occurrence when the ridge is a long one. These dips, or depressions, vary in depth, the deeper ones constituting the passes through the range. The shallower depressions are often called 'saddles' from their shape.

A hill may stand alone; but more frequently it forms one of a group of hills, either rising here and there from an elevated plateau, or connected by ridges, straight or bent, simple or branched.

The sides of the hills and ridges are generally broken

into bulges and hollows, more or less marked, called 'salients,' and 're-entrants,' respectively.

From the former spring the 'spurs,' which form the under features of the hills, and which, in fact, are smaller ridges projecting from the main one, either at right angles or obliquely, and varying in size and shape: short, rounded and abrupt, or long and sloping gradually, or stretching out far with nearly level tops, in which case they often end in a slight rise or knoll.

The re-entrants form the heads of the valleys, which may be straight, curved, or branched, with sides of varying degrees of steepness. When a valley is deep and narrow, with sides sloping abruptly, it is called a 'ravine.' Through the bottoms of the valleys run the watercourses, by which the water, from springs in the hills, or from rain falling on them, finds its way to the nearest river, or to the sea.

If we stand at any point on the top of a ridge, facing along it, we see that the rain which falls on the ridge will run down, partly to our right hand, partly to our left, according to which side of the ridge it falls on. There must therefore be a line along the top, on which the water parts, to run in these two opposite directions, or, in other words, a line from which the slope downwards each way commences. This is called the 'watershed,' or 'water-parting' line. Every ridge or spur of any kind must have its watershed line, not necessarily straight, but often very irregular in direction, and often not very clearly defined.

These lines, together with the watercourses, mark out the shape of the ground, and an experienced sketcher, having these traced for him, and the heights of some of the principal points given, may make a fairly correct sketch of a piece of hilly ground without seeing it.

There is generally little difficulty in recognising which of the above-named features of ground we may be standing on at any moment. The following simple rules* may serve to guide the beginner:

* From Captain Lendy's 'Practical Course of Military Surveying.'

Observe the rise and fall of the ground in four directions, opposite, and at right angles to each other.

If the ground falls in all four, we are on a hill.

If it falls in three, and rises in one, we are on the watershed of a ridge or spur.

If it rises in three, and falls in one, we are in the watercourse of a valley.

If it falls and rises in alternate directions, (say rises to front and rear, and falls to right and left), we are on a saddle.

Plate VII. is an example of a sketch of hilly ground, illustrating the manner in which several of the above described features are represented, but in order to understand it the next section must first be studied.

SECTION X.

REPRESENTATION OF HILLY GROUND.

In all sketches made for military purposes, it is essential that the form of the ground should be represented. The positions of the hill tops, the shapes and directions of ridges, spurs, and watercourses, the steepness of the slopes, and the relative heights of different points, must all be shown.

Some conventional means must therefore be devised, by which these particulars may be shown, both with accuracy, and in such a manner as to convey the required information readily to the eye.

The system of representing ground by 'contours' answers both these conditions, and has been adopted for military sketches.

A contour is the intersection of the surface of the ground with a horizontal plane; or it may be defined more simply, as an imaginary line running along the surface of the ground and keeping on the same level throughout its whole length.

The following illustration may help in arriving at a clear understanding of these definitions:

Suppose a tract of hilly ground to be immersed under

water, and that the water sinks, by successive equal stages, a certain definite number of feet at a time. We can easily conceive what would happen as this went on. The tops of the hills would first appear as islands, then the ridges connecting them would gradually show themselves. As the water still sank, the spurs and the heads of the valleys would begin to be marked out, and the forms of these lower features would continue to develop themselves, till at length the water reached its destined permanent level.

Now suppose that, at the end of each stage of its subsidence, the water left a mark on the ground; each line thus traced would evidently be continuous, and at the same time level throughout its length. Each one would also be at the same vertical distance above and below its next neighbours.

These lines would be strictly contours, according to the definition; and, by traversing and plotting each in the ordinary way, we might make a complete contoured sketch of the ground.

We are all familiar with the way in which the shape of the coast line of a country is shown in ordinary geographical maps; how the water line stretches out from the land to embrace capes and promontories, and recedes into the land up the sides of inlets and arms of the sea, as far as the tide reaches.

Now the sketch we have just imagined would be a series of coast lines, marked at the several successive levels of the water; and, as each line would give the true shape of the land at its own level, it is evident that the set of lines gives a true representation of the shape of the whole.

Some familiarity with contoured maps is, however, required, before they will convey at once to the mind the idea of the shape of the ground they represent. In fact, the beginner must learn to 'read' them, as he would have to learn to read writing in any unknown characters. He will, probably, often be puzzled at first to decide which of two neighbouring contours is the higher, or to distinguish between a spur and a valley. Such difficulties will diminish with practice, as the eye becomes accustomed to the shape, on paper, of the

different features. He may often gain help in such cases by bearing in mind one or two simple facts, such as the following: When a sheet of water or a stream are represented in a sketch, the ground must, of course, rise as it recedes from them; consequently each contour becomes higher than the last, according as it is further from the water. Also, in going up a stream each contour that crosses it is higher than the preceding one.

Again, where a set of contours are found on a plan, one outside the other, each of which closes on itself (*i.e.* of which the ends meet), the innermost one is the highest, and denotes the top of a hill.

As regards spurs and valleys, (which somewhat resemble each other in the shape of their contours), it may be observed, as a general rule, that where the contours turn, those of the valley do so at a more acute angle than those of the spur, which are usually more rounded.

A good deal may be learnt by studying contoured sketches, on which the heights of the several contours, in feet, are all marked.

Better practice still is to copy on paper the contours of plaster models of ground, and then to compare the drawing with the model, so that the correspondence between the actual shape and its representation may impress itself on the mind. Drawing sections from contoured maps is also useful. The way of doing this will be explained in a later section.

Besides the general form of the ground, the contours show the degrees of steepness of the different slopes.

Bearing in mind that the distances shown in a plan are horizontal ones, (*see* Sec. III.), suppose two points on sloping ground, one of which is a given number of feet higher in level than the other. Evidently, the gentler the slope the further apart will the points be on the plan, and *vice versâ*; or, to put the case more simply, we have to walk further on an easy slope to ascend a given height than we have on a steep slope.

Consequently, the steeper the slope the closer together

will be the contours, and the gentler the slopes the further will they be from one another.

We may verify this fact for ourselves, by standing on a sea beach, and observing the difference between high and low water mark. Where the beach slopes very gradually the sea, on the fall of the tide, recedes to a considerable distance; but where it shelves steeply, the distance is but small, the level of the water being, of course, at any moment the same at both points.

It has been supposed, in the illustration given above, that the contours are at definite and equal vertical intervals one above the other, and this condition is essential to the true representation of ground by means of them. If we know what this interval is on any plan, we can find the actual height of any point above the lowest part of the ground, or the relative heights of any two points, by simply counting the contours.

For the sake of uniformity in military sketches, it has been considered necessary that a certain vertical interval between contours should be fixed upon and adhered to.

Two considerations influence the choice of this.

If it is made too great, the contours will not show the smaller features of the ground.

For instance, if it is 50 feet, there are no means of showing a hill 40 feet high; while if it is 20 feet, the same will be shown by two contours, one round the top, and one round the middle. Hence, the smaller the interval, the more faithfully is the ground represented.

But, on the other hand, the smaller the interval, the more numerous will be the contour lines; and this, if carried to excess, greatly increases the labour of making a sketch, besides tending to obscure the other details. Either extreme, therefore, should be avoided.

The rule laid down is, that for sketches at 6 inches to the mile, the vertical interval between contours is to be 25 feet. It is considered that this enables the ground to be shown with sufficient minuteness for military purposes. When the scale is 12 inches to the mile, the greater space occupied on

the paper allows room for more contour lines without crowding, and the interval is fixed at 12½ feet. On the other hand, at 3 inches to the mile, where the space is smaller, 50 feet is the regulated vertical interval.

It has been said that a contoured sketch of ground may be made by traversing the several contours, and, in fact, this is what is done, when great accuracy is required for any engineering purposes. A series of points, at the regulated vertical intervals, one below the other, is found by means of levelling instruments. Taking each of these as a starting point, a continuous series of points, on the same level with it, is found, (also by levelling), and marked out by pickets. Finally, the whole set of contours is traversed and plotted.

This, however, is a very laborious process, and, from the time it takes, is unsuitable for military sketches. For these another method is used, which is far more expeditious, and sufficiently accurate for the purpose. The principles on which it is founded, and the way of carrying it out, have to be explained.

Slopes of ground, or gradients as they are called, may be denoted, either by the number of degrees in the angle which the slope makes with a horizontal line, or by the proportion between the height and base of the slope, put in the form of a fraction, of which the height is the numerator, and the base the denominator.

Thus, we may speak of a 'slope of 30°,' or a 'slope of $\frac{1}{2}$,' both meaning practically the same thing. The fraction $\frac{1}{2}$ implies that, for every 2 feet of horizontal distance, there is a rise of 1 foot of vertical height.

This manner of expressing slopes falls in with the ordinary way of speaking. 'A rise of 1 in 50,' 'A fall of 1 in 220,' and so on, are common expressions, conveying their own meaning to the mind.

By using this form, we can find, by simple arithmetic, the length of base of any portion of a slope, if we know the vertical height, and the gradient.

Thus, suppose two points on a slope of $\frac{1}{12}$, one of them being 25 feet higher than the other; then, as there is a rise

of 1 foot of height for every 15 feet horizontal, there will be a rise of 25 feet, for $25 \times 15 = 375$ feet horizontal, which will be the length of base of the supposed slope, *i.e.* the distance of the two points from one another on a plan.

When the slope is given in degrees, we can arrive at the same result by trigonometrical calculation, or we may do so by geometrical construction as follows:

Draw two lines parallel to one another, at 25 feet apart, by any convenient scale (Plate VI., *fig.* 17). From any point A in the lower line, plot the given angle, say 4°, which is nearly the same slope as $\frac{1}{15}$, and draw the line far enough to cut the upper line. From B, the point of intersection, let fall a perpendicular BC on the lower line. Then, by measuring the length of AC, (by the same scale as was used to measure the 25 feet distance between the lines), the length of base of the supposed slope is found.

If this is correctly done, the result will agree very nearly with that obtained above by arithmetic. It will not agree exactly, for 4° is not exactly, though very nearly, the same slope as $\frac{1}{15}$. As a matter of fact, the length of AC is 360, instead of 375, feet, and trigonometry will give the same result.

It appears then, that, for a height of 25 feet and a slope of 4°, the horizontal distance, or base, will always be the same. And, similarly, for a height of 25 feet, any other degree of slope will have its own fixed definite length of base.

These distances are called the 'horizontal equivalents' of the several slopes for the given height, *i.e.* 25 feet.

A table of horizontal equivalents for every degree of slope, and for any given height, may be made by the above construction.

An example is given in Plate VI., *fig.* 18, in which the equivalents of 3°, 5°, 10°, 15°, 25° (viz. AB, AC, AD, AE, AF respectively), for a height of 25 feet, are found. The figure is drawn on a large scale, (36 inches to a mile), for the sake of clearness. It does not matter what scale we use for this purpose, provided that, in measuring the number of feet

or yards in each horizontal equivalent, we use the same scale as that from which we have taken the height of 25 feet; that is, the distance between the parallel lines.

We must remember also, that, in marking off any of these equivalents on our sketch, we must take the number of yards from the scale on which the sketch is drawn, 6 inches to the mile, or whatever it may be.

This table of horizontal equivalents tells us how far we have to march on any of the named slopes, in order to reach a point 25 feet higher, or lower, than where we started from; or, rather, it gives us the distance between the two points, as it will appear on our sketch, *i.e.* the true horizontal distance, and not the length of the line which we actually pace aloug the sloping surface of the ground. It has been explained, however, (Sec. III.), that on the gentler slopes, up to 5° or 6°, the difference between the two is so very small, being under 1 yard in 100, that we need not take it into account in contouring a military sketch. On steeper slopes, where the differences are greater, the same checks may be applied, from time to time, as we should use in sketching the details of the ground, and which have been already fully described.

It must be borne in mind that the method of contouring now being described is only approximate, and does not pretend to be quite exact. In fact, the instruments used, in military sketching, for measuring slopes, do not admit of their being ascertained to fractions of a degree, so that perfect accuracy is not to be expected.

It follows, as a practical result of what has been stated above, that, if we have means of measuring the slope of the ground along any selected line, we can, by pacing along that line, mark off a set of points on it, each 25 feet above or below the last, according as we are going up or down hill; and this is the principle on which the contouring of military sketches is executed.

A set of such lines is taken, each starting from the same level, and on each a series of points is marked off in the manner described. When a sufficient number of these has

been obtained, the contours are traced by joining the corresponding points of the several series; that is, those which are on the same level with one another.

An instrument for measuring the angles of slopes is called a 'Clinometer.' There are several different forms; but a very simple one, sufficient for purposes of military sketching, can be made, (without adding to the number of instruments to be carried), by a thread, with a weight at the end of it, attached to the protractor. The thread is passed through the hole close to the centre mark, and secured by a loop. If the protractor is held perfectly level, with the inner edge uppermost, the thread, when stretched by the weight, will cover the line from the centre to the 90° mark; but if the protractor is inclined upwards or downwards, the thread will make an angle with this line, which can be read on the edge, by counting the number of degrees backwards or forwards, as the case may be, from 90° to where the thread hangs (Plate VI., *fig.* 19).

This angle is the same as the angle which the edge of the protractor makes with the horizontal line; that is to say, it gives the degree of slope at which it is held, and therefore, if it is held so that its edge is parallel with the surface of the ground, the angle shows the number of degrees in the slope.

To use this clinometer, the sketcher holds it in the right hand, near the eye, and looks along the upper edge at an object the height of his eye above the ground (Plate VI., *fig.* 19), thus keeping the edge parallel to the surface of the ground. The finger and thumb of the left hand are kept ready to press the thread against the lower edge when the weight is steady. The protractor should be held upright, so that the thread may slide easily against the surface. If it is allowed to swing away from it, the thumb, in closing on it, will probably move it to one side or other of its true position.

The angle is then read. If the thread is at 90°, the ground is level; but if to one side or the other, there is a slope, up or down, as the case may be, equal to the number of degrees counted from 90°.

This instrument can therefore be used as a level, as well as a clinometer, and its use is easy with a little practice. The chief drawback is, that in high wind it is difficult to get the weight steady. For this reason, a leaden bullet, being heavier, is better than the small brass weight issued with the protractor, and the string should not be too long. If the weight hangs two or three inches below the protractor, it is sufficient.

Abney's reflecting level is sometimes used for measuring slopes. It consists of a small telescope tube, about 4½ inches long, near one end of which is fixed, in a vertical position, a graduated semicircle of brass with teeth cut in the edge, and to which a small spirit level is attached, along, and parallel to, the diameter. The semicircle can be turned about on its centre by a screw with teeth fitting those of the edge, and the graduated part works along a small brass arc, with an index point in the middle. In the upper part of the telescope tube is a mirror, so arranged that, if we look through when the spirit level is horizontal, we see the bubble reflected.

To use the instrument for measuring slopes of ground, we set the 0° of the semicircle at the index, and look through the tube at an object the height of the eye above the ground. If the bubble is visible, the object is on our level; but if not, it is above or below us, and we must turn the screw slowly till we see the bubble. When we do so, the number of the degree opposite the index gives the angle of the slope.

This clinometer, like the other, is easy to use; but after some little experience in sketching, the eye becomes familiar with the slopes, and the clinometer need be but little used. It must be remembered, however, that the eye which is accustomed to judge slopes on turf may be deceived on heather, and *vice versâ*. It may also be remarked that it is much easier to distinguish, by the eye, the differences between the gentler slopes, than those between the steeper ones.

There may sometimes be difficulty in finding an object the height of the eye, to align the clinometer on. In enclosed country, something will generally offer itself. The

top of a gatepost, or a point in a hedge, wall, or tree, may be taken. It does not matter how near, or how far off, the object is, provided that the slope of the ground is uniform throughout the distance. In an open country various expedients may be used. If two men are working together, one may march on to give a point to the other. Or a common walking stick may be set up, and a short distance paced up or down the slope, and then the angle taken kneeling, so as to bring the eye to the same height from the ground as the top of the stick. Or the sketcher may lie down and take his sight along the top of the grass, heather, or other growth. When in going down hill, a gentler slope is succeeded by a steeper one, (Plate VI., *fig.* 20), the sketcher may step back till the prolongation of the steeper slope meets the eye, and then align the clinometer along the surface of the ground.

It may be useful to remark that, the further off is the object looked at, the smaller will be the error caused by its not being exactly the height of the eye.

The Aldershot protractor has a scale of horizontal equivalents on the back, by means of which their lengths can be marked off at once on the paper, instead of measuring them from the scale of yards. The equivalents given are for $12\frac{1}{2}$ feet vertical intervals, on a scale of 12 inches to the mile, and the length of each in yards is also given.

The scale can, however, be used also for 6 inches, or 3 inches, to the mile, provided we adhere to the proportion, mentioned above, between the vertical intervals and the scale of the map, viz. 25 feet at 6 inches, and 50 feet at 3 inches, to the mile.

It is easy to show that this is the case. The equivalent for 25 feet contours is, of course, double that for $12\frac{1}{2}$ feet contours on the same slope; in other words, we must walk twice as far to rise 25 feet as to rise $12\frac{1}{2}$. But the length of line, which expresses any number of yards at 12 inches to the mile, will express twice as many at 6 inches to the mile. Hence the equivalents for $12\frac{1}{2}$ feet in one case, and for 25 feet in the other, are of the same length on the paper. For

the same reasons it is evident that we may use the scale on the protractor, when working at 3 inches to the mile, with 50 foot contours.

We must not forget, however, that if we require, for any purpose, to know the length in yards of any horizontal equivalent for 25 feet contours, we must double the number given on the protractor for 12½ feet contours. For 50 feet contours we must of course quadruple it.

For instance, on a slope of 5°, we find that the equivalent for 12½ feet is 48 yards. For 25 feet, then, it will be 96 yards, and the length of line, given as the equivalent of 5° on the scale, represents 48 yards at 12, and 96 yards at 6, inches to a mile.

The horizontal equivalents are given in pairs, bracketed together, for slopes of 3°, 4°, 5°, 6°, 7°, 8°, 10°, 15°, 20°, 25°, and 35°. For 2° the equivalent is given single, as there is not room for a pair. This plan of giving them in pairs is convenient where several have to be marked off along the same line, as it enables two to be done at once, and the protractor has only to be adjusted half as many times as if they were given single.

The way of using this scale is as follows: The sketcher, having chosen his line of march downhill, and laid it down on his paper, measures the angle of slope, ascertains from the protractor the number of yards in the horizontal equivalent, and starts to pace down the hill. He may either halt each time he completes the number of yards, and make a dot on his paper, or he may pace at once the whole distance to where the slope changes, mark his position on the paper, and put in at once, from the scale, as many equivalents as will go into the distance, commencing from the starting point, and marking each by a dot. Each dot will denote a fall of 25 feet.

Where the angle of slope changes, he must take a fresh observation with the clinometer, and proceed as before.

He may, if he pleases, number the dots 1, 2, 3, &c., commencing from the top, with small figures lightly pencilled, so as to make sure of joining the corresponding dots on the different lines correctly when he traces the contours.

It may happen that the distance to the change of slope is not exactly divisible by the horizontal equivalent, but that there is a remainder after marking the last dot. This remainder, of course, represents a descent of a certain number of feet, after the last 25 foot stage was completed, which number is easily found, by comparing the number of yards in the remainder with the number in the whole equivalent.

Thus if the remainder equals half the equivalent, the descent will have been 12½ feet; if one-fifth of it, the descent will have been 5 feet. This must be taken account of in marking off the first contour on the next slope. If it is 12½ feet, only half the equivalent of the next slope must be paced before the next mark is made; if it is only 5 feet, four-fifths of the equivalent must be paced, and then the dot made.

An example will illustrate this. Suppose the slope at starting to be 3°, and that it continues for 200 yards. The equivalent of 3° is 160 yards, and the first dot is made at that distance. There is a remainder of 40 yards, or one-fourth the equivalent, which denotes a fall of one-fourth of 25, *i.e.* 6½ feet. The slope now changes to 6°, and remains at this for 260 yards. The equivalent of 6° is 80 yards, but as one quarter of the second 25 feet has been done already, only three quarters remain to do; therefore only three quarters of the 80 yards, viz. 60, must be paced for the second dot. The third and fourth will be at the full intervals of 80 yards; that is, at 140 and 220 respectively from the change of slope. On reaching the 260 yards, where the next change of slope occurs, there is again a remainder of 40 yards, which in this case equals half the equivalent, so that a descent of 12½ feet has been made since the last contour. The slope now becomes 8°, the equivalent of which is 60 yards. As there are only 12½ feet to go down to complete this 25, the fifth dot will be at 30 yards from the change, and the following ones at intervals of 60 yards, as long as the slope of 8° lasts.

The beginner may find it useful practice to work a few examples of this kind for himself, taking the slopes and number of yards in each at hazard.

For instance, let him place the dots for the contours on the following slopes, viz. 2° for 180 yards, 4° for 210° yards, 7° for 170 yards, and 10° for 120 yards.

He may easily set himself any number of examples of this kind, till he understands the principle thoroughly.

In measuring the slopes, we may meet with one of which the horizontal equivalent is not given in the scale, say one between 15° and 20°. As we know from the scale the equivalents of these two, we must judge the intermediate one, giving it a length between the two proportional to the difference of angle.

For instance, take a slope of 18°. The equivalent of 15° is 32 yards, and that of 20° is 24 yards. We should therefore judge that of 18° to be about 27 yards, which, in fact, is very nearly what it really is.

Contours are drawn in chain dotted lines, as shown in Plate VII., and generally in blue or red to catch the eye. They are not drawn across roads or rivers, nor through houses, gravel pits, &c., but are dropped at one side, and continued again from the other. They are often numbered, as in the figure, to show their heights, in feet, above the level of the sea, or of the lowest point on the sketch.

It may be of use to caution the beginner against one or two mistakes, which are sometimes made, in forgetfulness of the true nature of contours.

A contour cannot be lost. It must either close on itself, as it does in going round an isolated hill, or continue unbroken till it reaches the limit of the sketch.

Nor can two contours run into one. To make them do so is to assert that two lines, one of which is always 25 feet above the other, are, at a certain point, on the same level, or that one of them is vertically over the other. This last fact, however, does really occur, in the exceptional case of an absolutely perpendicular precipice. This has no horizontal base; therefore, strictly speaking,* the top and bottom, and, consequently, all the intermediate contours, would run into

* To represent the cliff on paper a certain width must be taken.

a single line. But when the cliff changes again to hill side, the lost contours will reappear in their proper places.

It is not safe to trace a contour joining two points, though ascertained to be on the same level, unless the intervening ground can be seen. We cannot tell how the contour may wind, in passing from one point to the other, nor, in fact, whether they ought to be joined at all.

For instance, the points *a a* in Plate VII. are on the same level; yet it would be an error to join them, for there is lower ground between, and a contour cannot depart, even for the shortest distance, from its own proper level.

When, as is generally the case, the top of a hill is higher than the highest contour, it should be numbered with its total height, in feet, above the lowest point of the sketch.

SECTION XI.

PRACTICAL CONTOURING.

The object of the last two sections has been to prepare the learner for the operation of systematically contouring a piece of ground.

But before he can satisfactorily carry out the details of this work, it is essential that he should have grasped the *general idea* of the way in which ground is represented by contours; that is to say, he should understand how they wind round a spur or valley, in what directions they bend to mark a salient, or a re-entrant, how they are situated on a saddle, &c.

To master this is perhaps the most difficult part of military sketching to a beginner, especially without the aid of an instructor. Something may be done towards it by the copying and study of models, alluded to in the last section. Still more may be learnt by going over a piece of ground, with a contoured sketch of the same in hand, comparing the natural features with their representations on the paper, and endeavouring to trace the course of any particular contour.

As a further step, the learner may sketch for himself the details of any piece of hilly ground, the features of which are well defined, and, taking it to the ground with him, try to follow the contours by the eye. In doing this, the question he has continually to ask himself is this: 'In what direction must I walk to keep on my present level?' The answer to this is the solution of the problem. When he can in this way run a single contour through his sketch, he may, by observing the slopes up and down, trace the contours next above and below it, and thus, by degrees, establish in his mind a conception of the relation between real ground and the contours representing it.

During the process of triangulating and putting in the details of a piece of ground, some knowledge of the nature of its features will have been gained; sufficient, in the case of a sketcher who knows his business, to enable a decision to be come to, as to the best and most expeditious way of executing the contouring.

Ground is so infinitely varied in its combinations, that it is scarcely possible to do more than give a few general rules for guidance. The details of the execution of each individual case must be left to the judgment of the sketcher.

As a general rule, the contouring of a piece of ground is commenced by sketching in the 'crest line,' or highest contour, which serves as a starting point for running the several lines down hill, as described in the last section.

This is done by traversing, using the clinometer as a level.

On some kinds of ground, the tops of the hills are level plateaux, with well marked crest lines, from which the ground begins distinctly to fall. More frequently, however, there is no well defined crest line, and the sketcher must decide on the level at which he will trace his highest contour. This must, of course, not be more than 25 feet* below the summit, or another contour would have to be drawn above it.

* We are supposing the sketch to be at 6 inches to the mile, with 25 feet vertical intervals.

The chief points to be considered, in deciding on the crest line, are, that it should give a good general indication of the shape of the top of the hill, and that there should be points on it which can be found again, (such as gates, conspicuous trees or bushes, rocks, &c.), so that the sketcher may, without difficulty, establish himself on the proper level, on his return to the top, after each journey down the hill.

Having fixed on his line, he finds, by means of the clinometer,* some point, at a convenient distance from him, on his own level, and traverses up to it, putting in the bends of the crest line as he goes. When these are small and unimportant, they may be put in by the eye, remembering that when the line of pacing passes over a slight rise, the crest line curves outward, *i.e.* away from the summit, while, in the case of a dip, it curves towards the summit. But when the bends of the crest line are considerable, so as to affect to any extent the shape of the lower ground, offsets must be paced, and the levels checked by the clinometer. It is important to get the heads of the salients and re-entrants correctly placed, for they mark out the shape of the ground, and form the starting points of the several lines which are run down the hill.

The remainder of the crest line is traced in the same way, by levelling and traversing, till it either closes on the starting point, or reaches the limit of the ground which it is intended to sketch.

Having completed the crest line, the sketcher commences to work down the slopes, along such lines as he considers necessary, in order to obtain, in the manner already explained, the several series of points, (at 25 feet vertical intervals), which are required to enable him to trace the successive contours below the crest line.

These lines need not necessarily be numerous. As a rule, a few, judiciously chosen, will suffice ; they should, whenever

* For short distances, levels may be judged pretty accurately by the eye, with practice ; but at long distances the eye is deceived. A long stretch of intervening ground generally makes the distant point look higher than it really is.

it is practicable, cut each contour at right angles,* as the shape of the ground is more correctly indicated by joining the points thus obtained, than if the contours are cut obliquely. Lines traced in this way, cutting every contour they meet at right angles, are called 'orthogonals.'

It may, in some cases, be necessary to run an orthogonal down the side of a hill or spur; but the principal lines to be followed are the watershed and watercourse lines, as it is on them that the contours turn to change their directions.

The watercourse lines are distinctly marked on the ground, and it is easy to follow them. The watershed lines are not so easy, and it may often require a practised eye to recognise them. A rough rule may be given for following the watershed line down any spur or bulge of ground, viz. always to aim at where the ground appears to come to a point, *i.e.* in the direction in which the lower ground appears furthest from us. By continually doing this, we shall always be passing through the points on which the contours turn, which is what we want to do.

It may help the learner to understand this, if he studies a plaster model of ground, and endeavours to trace the watershed lines. He will find that these, as well as the watercourses, cut each successive contour at right angles at the extremity of its bend.

These watershed lines are not always straight. Very often they are curved, and sometimes are very irregular in their course. To traverse them systematically would take a long time; but in a sketch of which the details are already drawn, the sketcher will often find himself marching in the direction of some known point, or nearly in such direction, so that great part of the orthogonals may generally be traced by the eye, without much use of the compass. Provided the posi-

* Where the contours are straight, and parallel to one another, as along a straight hill side, it is easy to conceive a line drawn at right angles to them. But where they are curved, this may require explanation. A straight line is said to cut a curve at right angles in any point, when it is at right angles to a straight line drawn touching the curve at that point.

tion is occasionally checked by an interpolation, an error of a few yards to the right or left, in tracing the intermediate parts, will affect the shape of the ground but little, if at all.

To pace the whole slope, from the highest to the lowest level on every line, would be very laborious. In many cases it is not necessary to do so. When we see that a slope is uniform down to any point, whose position is marked on our paper, we can find, by the scale, the number of equivalents that will go into the distance, and mark them off, without pacing it. For instance, when, at the foot of the slope, there is a creek, lake, or marsh, the edges of which are correctly marked on the sketch, we may stop our pacing down, as soon as we reach a point from which the slope continues to the bottom without change. By taking the angle of this slope, and marking down the equivalents from the scale, as many as will fit into the distance, we get the proper number of contours, and consequently know the height of the hill.

Again, though, in some cases, we may have to run orthogonals up or down the watercourse of a valley, in order to ascertain its fall, we can often save the labour of doing so. For instance, when we work down different re-entrants, all leading into a principal watercourse, we find the level of the latter at each point where we strike it, and, by observing the slope of its bed up and down each time, we can generally put in the intermediate contours without pacing up or down it; which, in fact, would often be difficult to do.

On the same principle, when we have a spur between two watercourses, it will generally be sufficient to measure the slopes of the latter from their heads, and, judging how far those slopes continue without change, to dot in the contours accordingly, and then to run an orthogonal down the spur to where the watercourses meet. We can then measure their slopes upwards, as far as we can see; and, as we know, from having worked down the spur, the total number of contours from top to bottom, we can generally put in the intermediate ones, along the streams, with sufficient correctness. If the spur is a very long one, we may, if we please, at any point of it, (marking our position so as to be able to

find it again), run an orthogonal down the side into the bed of either watercourse, or both, which will give us the level of each where we strike it. By doing this, we are also able to observe whether the sides of the spur have any salients or re-entrants which we ought to notice.

It often happens that a re-entrant, which is strongly marked at the crest line, becomes less and less so as we go down it, till at last its contours blend into those of the lower slopes of the hill. It is unnecessary to follow it beyond this point.

In sketching a valley with hills on each side, it is useful, while working down one side into the valley, to take opportunities of levelling across, with the clinometer, to known points on the opposite side. This establishes a correspondence of levels between the two, which, if not more accurate, serves, at all events, as a check on those obtained by working down one side and up the other. If the hedgerows and similar landmarks are down on our sketch, we may sometimes be able to trace a whole contour, by observing what points in the hedges, &c. are on our level, both on the sides and towards the head of the valley. We can then take their bearings with the compass, and join the points at which those bearings cut the several hedges respectively.

We may find, approximately, the angle of a slope at a distance from us, if we can see its edge well marked against the sky, or any other good background, by holding up the clinometer across us, so that its upper edge coincides with the surface of the slope, and reading the angle.

It is not necessary invariably to begin the contouring of a piece of ground from the highest part. The crest line must, of course, be sketched; but, instead of beginning with it, we may first work up to it, by running an orthogonal up from some lower level, either the lowest on our ground, or some intermediate one.

For instance, if a large valley forms one of the principal features on our ground, we may start from the bottom, and work up it till we reach the crest, taking the slopes of the sides as we go, and marking in the various salients, re-en-

trants, and minor watercourses. On reaching the crest line, we can proceed, in the manner already described, to finish the ground.

Or we may start from some point near the end of a spur, contour the lower part of it first, and then work up its watershed to the crest.

In fact, there are many different ways of contouring the same piece of ground, and a sketcher must judge for himself which to adopt. To guide him in this, he should endeavour to gain all the knowledge he can of his ground while executing the preliminary parts of his sketch.

SECTION XII.

EXECUTION AND FINISHING OF THE SKETCH.

Besides compass and protractor, the requisites for sketching in the field are as follows, viz. sketching case, pencils, india-rubber, penknife, and note book.

The foundation of the sketching case must be a smooth stiff surface, such as millboard, to stretch the paper on, with some means of fastening it down, either elastic bands, or, better still, a metal rim, about half an inch wide, going all round the edge, so as to clip the sides of the paper down, opening and closing on the millboard by a leather hinge on one side, and kept tight by a strap and buckle on the other. This is the principle of the sketching case used at the Royal Military College. It has the advantage of allowing the spare edges of the paper to be folded under, which is useful where a large sketch has to be made. There is also a waterproof flap to protect the sketch from rain, dirt, &c., and a strap to hang the case over the shoulders.

The pencils required are a hard (HHH) and a softer one (HB), and blue and red chalk pencils, the former to put in water, and the latter masonry buildings, bridges, &c.

For all the plotting of the sketch, the hard pencil is used, with a very fine point, and all the work is done lightly, so as to be easily rubbed out where corrections are

necessary. All superfluous lines and dots should be taken out at once. When all the work on the ground is done, and the sketcher satisfied of its correctness, the soft dark pencil comes into use, all the lines being gone over with it, so as to bring them out clear and distinct. In doing this, the original work may be rubbed out, bit by bit, so as to be only just visible, before tracing it over with the dark pencil, so that all errors and confused parts may disappear, and only the correct work be seen.

The sketch is then fit to be handed in on the ground, if required; but in all cases, whether given in in pencil, or subsequently inked in, the scale,* and north point, must be drawn, (as shown in Plate I., *figs.* 2 and 6), in some convenient part of the paper, the vertical interval between contours noted, and the sketch signed, dated, and headed with the name of the locality.

Also the names of all places on the sketch, and of those to, and from, which the roads lead, must be clearly written or printed.

If the sketch is to be inked in, indian ink is used. Where any colour is to be laid on, as on roads, woods, &c., all pencilling under the colour should be entirely rubbed out first, as it will not come out afterwards. If edges of roads or rivers, or boundaries of woods, are inked before the colour is laid on, they should be done in very fine lines, lest the ink should run. They can be thickened, if required, when the paint is dry.

In laying on a flat shade, enough paint for the whole should be mixed at once, as it is difficult to get the same shade again. The colour should be laid on quickly, and the edge not allowed to get dry till the whole is done.

When the triangulation has to be shown in a sketch, it is generally done in red, the base line being drawn slightly thicker than the others.

It is well to bear in mind always, that, next to accuracy, clearness is the most valuable quality in a military sketch.

* The scale is easily drawn by ticking off the lengths of the divisions from the edge of the protractor

SECTION XIII.

SHADING.

The features of ground are sometimes represented by shading with pen, pencil, or brush. This is not so accurate a method as showing them by contours, and shading is more frequently used to complete the sketch after the contours have been drawn, than as a substitute for them. In either case the principle is the same, viz. to bring out the steep slopes by strong dark shading, to shade the gentler slopes more lightly, and to leave the level ground clear.

The object of shading is to assist the eye in reading the plan, by bringing prominently before it the relative steepness of the slopes, on which depends the practicability of moving troops of the different arms on them.

Another point gained is that it enables changes of ground to be represented, which are not of sufficient height to be shown by contours at the regulated intervals. To gain the full benefit of this, however, the shading should be done on the ground; but it may be effected, to some extent, by the sketcher noting, (either by lightly tracing contours at half or quarter intervals, or in some other way), the principal variations.

English military sketches are shaded on what is called the 'horizontal system,' which consists in drawing strokes, or 'hachures,' between the contours, conforming to their bends, and, in fact, approximately parallel to them; intermediate contours as it were, though they differ in some essential points from contours, as will be explained presently.

It is obvious that, if shading is to be used, some definite scale is required, fixing the degree of shade, *i.e.* the proportion between black and white on the paper, for the several degrees of slope, so that the work of different draftsmen, when pieced together, may harmonise. Accordingly the following scale has been adopted, in which it will be observed that the required depth of shade for any slope is obtained, both by regulating the distance of the hachures

from one another, and by increasing or diminishing the thickness of each.

SCALE OF SHADE.

Degree of slope.	Number of strokes per inch.	Thickness of each stroke.
35°	32	$\frac{1}{50}$ inch.
25°	32	$\frac{1}{70}$,,
20°	30	$\frac{1}{90}$,,
15°	28	$\frac{1}{110}$,,
10°	24	$\frac{1}{180}$,,
5°	18	$\frac{1}{230}$,,
3°	14	$\frac{1}{300}$,,
2°	10	$\frac{1}{400}$,,

For slopes of 35° to 45° the number of strokes per inch remains the same, the thickness being increased according to the skill of the draftsman. Slopes of over 45° are shown as broken ground. Slopes under 2° are shown by strokes wider apart.

The scale of shade is printed on the back of the Aldershot protractor. On one edge, with the horizontal equivalent for each slope, is given the number of strokes to be drawn between any two contours at that slope, the proper thickness of the strokes being also shown. On the other edge is a small block of hachures, drawn according to the scale, for each slope, to show the effect. It will be seen, by the scale of shade on the protractor, that the number of strokes, between any two contours varies with the degree of slope, diminishing gradually as the slope becomes steeper, the reason being that, as the contours draw closer together; there is not room for the same number of strokes as when they are far apart. The hachures, therefore, cannot be drawn continuously, (differing in this respect from contours), and in passing from gentle to steep slopes some must be dropped, while in going from steep to easy slopes some have to be added. The hachures are, therefore, drawn in short, broken lines, connected in such a way that the changes in number may be almost imperceptible. To do this neatly some skill

is required; and, in fact, to shade well demands some natural aptitude as well as much practice. It is learnt, in the first instance, by copying a series of examples, and a few general rules may be given here for the guidance of the beginner.

The strokes are drawn towards the body, the paper being turned about as may be necessary. They are drawn in small blocks of about half-a-dozen to a dozen strokes each, care being taken that all the strokes in a block are not of the same length. In joining one block to another, the ends of the strokes should not exactly meet, but fall rather on the intervals; the object of this being to disguise, as much as possible, the adding or dropping of strokes, while, by making the several strokes in each block of different lengths, the stiffness that would result from having all the joints in the same line is avoided. Each individual stroke should be of the same thickness throughout its length, and the blocks should not begin nor end exactly on the contours, or the work will look as if it had been done in bands.

Shading is usually begun at the top of a hill, and carried downwards.

In using the scale of shade it must be remembered that changes of slope do not uniformly, nor even generally, coincide with the contours; and therefore the different slopes should blend one into the other, and not change abruptly. Consequently the scale of shade is to be looked on rather as a general guide to the way in which different slopes are represented, than as a copy to be strictly adhered to.

Shading is not absolutely necessary. A correctly contoured sketch shows the heights of hills, and the steepness of the slopes, which are the essential points for military purposes. A military draftsman must, however, understand enough of the principles of shading to be able to read a shaded sketch.

Shading should not obliterate the contours. The latter should, therefore, be drawn so as to be seen through it, and the heights of the tops of the hills should also be marked.

SECTION XIV.

DRAWING SECTIONS OF GROUND.

If we suppose a hill to be cut vertically downwards into two parts, and the part on one side of the cut removed, there will be exposed to view an outline of the surface of the ground along the line of the cut, showing its rise and fall, the steepness of the slopes, and the heights of the several points along that line. Such an outline is called a 'section' of the hill: a section of ground being defined as 'the intersection of its surface with a vertical plane.'

On a contoured map of ground, we may draw a straight line in any direction, cutting the contours, as AB (Plate VIII., *fig.* 21), and, if we know the scale of the map, and the vertical interval between the contours, a section of the ground on that line can be drawn as follows:

A certain level must first be assumed, from which to measure the heights of the several points in which the line cuts the contours. This is called the 'datum level,' and may be assumed at the level of the lowest contour, or at any lower level that may be convenient, such as that of the sea, or any large sheet of water on the ground.

A line is drawn to represent this 'datum level,' and above it, parallel to it, lines are drawn at distances apart, (by the scale of the map), equal to the vertical interval between the contours. As many of these lines must be drawn as there are contours.*

The next step is to measure on the plan, along the cutting line, the distances of the several points in which it cuts the contours, and to transfer them to the datum line. This is readily done by laying a straight edge of paper along the former line, marking the intersections, and then taking them off along the latter line.

At each of these points perpendiculars are raised. These,

* Of course if the datum level is below the lowest contour, the first of the parallels must be drawn at a distance above the datum line equal to the difference.

with the parallel lines already drawn, will form a set of rectangles, (see Plate VIII., *fig.* 21), and the section can then be drawn, by following the cutting line through its successive intersections with the contours, marking the height of each above the datum level on the corresponding perpendicular, and then tracing a line through these points.

The lines joining the points will, in general, be diagonals to the rectangles, drawn upwards where the ground rises, and downwards where it falls ; but in some cases, in passing from one intersection to another, they will rise or dip slightly, and return to the same level.

In the example given, the lowest contour is taken as the datum level, and the ground rises through the first five intersections, reaching the fifth contour from the lowest. The section line then passes over the top of the hill, and returns to the fifth contour. In the next two stages there is a fall from the fifth to the third contour above the datum level. Next, the line dips, nearly, but not quite, touching the second contour, and rises again to the third. It then rises very slightly above the third, and returns to it again, and then falls through the next three stages till it arrives at the datum level.

In this example, the contours are numbered along the line AB, to facilitate following it out, the datum level being numbered 0, the next above it 1, and so on. Corresponding numbers are put to the parallels drawn above the datum line. This precaution may be taken to prevent mistakes when a section of complicated ground has to be drawn.

In inking in a section, it is usual to draw the datum and section lines continuous, and those parts of the parallels and perpendiculars, which lie between them, dotted, and to rub out the rest. In the example, the whole of the latter are left, to show the construction.

If, in drawing a section of ground, the heights of the perpendiculars are measured by the same scale as that to which the map is drawn, the section is a true one. But this does not convey an adequate idea of the steepness of the slopes, and it is common to exaggerate the vertical heights

in proportion to the horizontal distances. In the example, the former have been exaggerated by three times—a convenient proportion, as the scale of yards, used in measuring distances, can be taken as a scale of feet for the heights.

A handy way, in this case, of getting the distances for the parallels, is to raise perpendiculars near the ends of the datum line, and to mark off on each of them, from the scale on the protractor, as many distances of 25 yards as are required, and then to join the points.

SECTION XV.

COPYING, REDUCING, AND ENLARGING MAPS.

One of the simplest ways of making a copy of a military sketch is to lay over it a piece of tracing paper, or cloth, made for the purpose, through which everything can be seen, and to trace over it, in pencil, all the lines, &c. of the original. This is an expeditious way of copying, and the original is not defaced. If the work is interrupted before completion, it can be resumed at any time, as the tracing material can be replaced in its proper position on the map by means of the lines already drawn.

If the copy is required to be kept for any length of time, cloth is preferable to paper, as the latter is fragile, nor is it easy to ink in the drawing on it.

A copy may be made on ordinary drawing paper on the same principle; but, instead of laying it over the original on a table, both are held up against the glass of a window, when, if the lines on the original are distinctly drawn, they can be seen through by means of the light at the back. If they are too faint for this, a trace can be made on thin paper, (as described in the last paragraph), with strong dark lines, and the copy made from this by holding it to the window. This is an inconvenient method when the map to be copied is large.

Copies may also be made by means of black lead tracing

paper. This is laid on the clean paper, (blackened side downwards), and the original on the top of all. The lines in the latter are then gone over with some blunt pointed instrument, slight pressure being applied, so as to transfer all the lines to the paper underneath. A disadvantage of this method is, that, if the work is interrupted in the middle, it is difficult to replace the sheets exactly as before; and if the copier should accidentally omit to go over any of the lines, he does not know it till the paper is taken up. Also the original is defaced to some extent; but this may be avoided by first taking a trace on thin paper, and using it to make the copy from.

Another way of copying a map is to rule lines dividing it, (or a trace of it, if the original must not be defaced), into squares of a convenient size, and to rule similar squares on the paper on which the copy is to be made. The details are then copied, square by square, by marking the points where roads, streams, boundaries, &c. cut the sides, and joining them, drawing any intermediate bends by eye, or measuring offsets to them from two adjacent sides of the square. If there is very much detail in a square, the diagonals may be drawn to help. The exact position of any important landmark, such as a church, cross roads, &c., may be got by measuring its distance from two corners of the square in which it is, and describing arcs to intersect one another from the corresponding corners in the copy.

This is not an expeditious method; but very accurate copies may be made by it, and the principle may be usefully applied, where the copy is required to be on a larger or smaller scale than the original, by ruling the squares larger, or smaller, in the required proportion.

For example, a plan, at 6 inches to the mile, has to be copied on a scale of 3 inches to the mile. Rule the original in squares of 1 inch side, (Plate VIII., *fig.* 22), and the paper for the copy in squares of half an inch side, and copy square by square, of course halving, on the copy, all the distances measured on the original. By reversing the process, a copy on double the scale of the original may be

made. In the same way, copies may be made on a scale three, four, five, &c. times larger or smaller than the original, by proportioning the size of the squares accordingly.

In the case referred to in Sec. VII., where a considerable length of road has to be sketched, a trace of it may be made before starting, from a map of the country, by the above means, whatever may be the scale of the map and of the proposed sketch.

The proportion between the sides of the squares is easily found by means of the representative fractions.

To give an instance: Suppose it is required to make a trace on a scale of 2 inches to a mile, or $\frac{1}{31680}$, from an Italian Government map, of which the scale is $\frac{1}{86400}$. The simplest way will be to make the squares for the sketch of 1 inch side. As this length represents half a mile, or 880 yards, we must find what length of line on the Italian map represents that distance. This is done as follows: We know by the representative fraction that, on the map, 86,400 inches are represented by 1 inch, and as we want to make the sides of our squares 880 yards, or 31,680 inches, we have the following proportion:

inches.		inches.		inch.		
86,400	:	31,680	::	1	:	length in inches which represents 880 yards,

which we find to be 0·37 of an inch very nearly. We must therefore rule the map in squares of $\frac{37}{100}$ inch sides.

Another point has to be considered. If the trace, when made, is to be verified on the ground, and the details completed by means of the prismatic compass, we shall require east and west lines on our paper, in order to plot the angles we take. But since, in all geographical maps, the north point given is the true and not the magnetic north, we cannot take this as our guide in drawing the east and west lines. We must therefore find the local variation of the compass, so as to be able to draw the magnetic north and south line on the map. This variation can be found, either by getting two conspicuous landmarks exactly in line with us, and taking the bearing, or by taking the bearing of a long straight line

of road. A line is then drawn through the two points, or along the direction of the road. The centre mark of the protractor is laid at any point on this line, and the instrument pivoted round on it, till the line cuts the number of degrees in the observed bearing. The inner edge of the protractor will then evidently be lying in the direction of the magnetic north and south, and if a line be drawn along it, the east and west lines, for the compass plotting, can be ruled at right angles to it.

It may, perhaps, be found more convenient to get the direction of the magnetic meridian in this way before drawing the squares, and then to rule their sides parallel to, and at right angles to, it, instead of to the north and south line of the map.

For measuring the distances on the sides of the squares, a scale of yards for the copy, and another for the original, may be drawn on slips of paper in the manner described in Sec. IV.

SECTION XVI.

SKETCHING WITHOUT INSTRUMENTS.

On tolerably open ground a sketch may be made with some accuracy without any instrument for measuring or plotting angles.

Two ways of doing this will be here described, the first of which requires nothing to be taken on the ground but a note book and pencil.

If any three objects on the ground, which are not all in the same straight line, are taken, the lines joining them will form a triangle; and, if these lines are measured, the triangle can be plotted on paper, as follows:

Let A, B, and C, (Plate VIII., *fig.* 23), be the three points, and let the distances be, A to B 430 yards, B to C 585 yards, and C to A 650 yards.

Draw a line to represent AB, 430 yards long by any

scale. Take a pair of compasses with pencil leg; open to 650 yards on the same scale, and, with A as centre, describe an arc; again, alter the compasses to 585 yards, and, with B as centre, describe another arc on the same side of AB. The intersection of these arcs gives the position of C, for we know from Euclid that no other triangle can be made, *on the same side of AB*, with sides of those lengths. An exactly similar triangle can, however, be made on the other side of AB; so it is necessary to note on which side of AB the point C lies.

If, while pacing from A to B, B to C, and C to A, the points are noted where those lines cross roads, streams, hedges, &c., and offsets be taken to objects near the lines, the whole may be plotted in the same way as an ordinary traverse (*see* Plate VIII., *fig.* 23).

When the triangle ABC is completed, either of its sides may be used as a base to find a fourth point (as D), and this may be carried on, till it embraces the whole of the ground to be sketched.

A sketch of this kind must necessarily be made with field book, as no triangle can be plotted till all three of its sides are measured. The field book may either be kept in the same way as in ordinary traversing, or by drawing rough diagrams of the triangles, and marking the distances and offsets along their sides.

The other method of sketching without instruments is known as 'eye sketching.' It cannot be done with field book, as everything must be drawn on the ground. A sketching case, or board with paper stretched on it, is therefore required, also a flat ruler or straight edge of some kind, and a scale for measuring distances.

The triangulation is done as follows: The base is first fixed upon, and a line drawn to represent it. As we are independent of the north point in sketching in this manner, the only point we have to look to is, that the base be so placed that all the work may come in on the paper.

One end of the base being marked, the sketcher stations himself at it, and, laying the straight edge of the ruler along

the line on the paper, he places the sketching case on the ground, and turns it about, taking care not to move the ruler, till the edge of the latter is aligned on the other end of the base. This can be pretty accurately done, with a little practice, by stepping back a pace or two to look along the edge. When this is done, the paper is lying in its true position with reference to the ground, *i.e.* the line drawn on it coincides in direction with the base line on the ground.

The paper must then be kept steady, and the ruler moved round, keeping its edge in contact with the end of the base, till it is aligned on one of the objects which it is desired to fix. When it is so placed, (which is ascertained by stepping back and looking along the edge as before), a line is drawn along it, which gives the true direction of the object, from the point at which the sketcher is standing. The same process is repeated for each point that is to be fixed, always pivoting the ruler on the point representing the end of the base.

On the completion of this the case is taken up, and carried to the other end of the base, which is at the same time paced, and its length marked off by scale.

The next step is to replace the paper on the ground in its true position. This is done by again laying the edge of the ruler along the base, placing the whole on the ground, and turning it about as before, till the edge of the ruler is in line with the other end of the base, the sketcher taking care, of course, that the near end of the base on the paper is kept towards him, and the far end away from him.

The paper is now in the same position with reference to the ground as it was before, and the sketcher can proceed to fix his points, by pivoting the ruler, in the manner already described, on the end of the base at which he is standing, and aligning it successively on the points. Lines are drawn along it in each case, the intersections of which, with the lines previously drawn, will give the positions of the several objects.

Angles may then be taken, if required, from any of these points; it being remembered that, invariably, the first step

in commencing work at a new station, is to lay the ruler along the line from it to some other known point, and, by looking along it, to get the paper into its true position on the ground before commencing to take angles.

The traversing is done on exactly the same principle, starting from some known point, and adjusting the paper there, and at each subsequent station, by means of the last station, or some other known point, before taking the forward angle.

In the contouring, the orthogonal lines are traced in a similar manner when required, and the slopes judged by the eye.

Though in a sketch made in this way, the north point need not be in any particular position on the paper, still a line showing the direction of north and south should be drawn if possible. On a sunshiny day the direction may be found thus: Shortly before noon, having adjusted the paper on the ground, set up a short, straight stick, so that the shadow may fall across it. The direction of the shadow at noon is very nearly true north and south, the end furthest from the stick being, (in northern latitudes), the north.

If without a watch, noon may be known by marking the length of the shadow till it is at its shortest and begins to lengthen again.

If the sketcher is without a scale, a rough one, but sufficient for the purpose, may be extemporised by cutting a long, narrow strip of paper, and doubling it repeatedly into two, four, eight, &c. parts, till a convenient length for representing 100 yards is arrived at. By again doubling the end division into eight parts, distances of $12\frac{1}{2}$ yards may be measured. This scale can be marked off on the sketch, for measuring distances on it. Its representative fraction can be found afterwards, when there are means of measuring the actual length of one of the hundred yard divisions.

SECTION XVII.

USE OF ANEROID BAROMETER IN CONTOURING.

The pocket aneroid, fitted with a movable arc graduated in feet, may be made useful in contouring ground. If the zero of the arc is set opposite to the point of the needle at any particular spot, then, on moving up or down hill, the amount of rise or fall is shown by the movement of the needle along the arc.

The divisions on the arc are usually for hundreds of feet; but a form of the instrument has been devised by Lieut.-Col. Hutchinson, R.A., expressly adapted for military sketching, the arc being graduated in divisions of 25 feet.

Ground may be contoured quickly and very accurately with this aneroid, provided that no atmospheric change, affecting the barometer, occurs while the work is going on; but, in a climate like that of England, changes in the barometric pressure occur frequently and suddenly, and often without any apparent cause, and a very slight change is sufficient to affect the accuracy of the work.*

It is not safe, therefore, to trust to a single reading of the aneroid for the difference of level between any two points, especially if some time has elapsed between the observations, even though wind and weather appear to have undergone no change. If, however, a second reading can be taken and is found to agree with the first, there is a very strong probability of their being correct. But to get a second reading for every difference of level during the contouring, would involve going over the ground at least twice, and more generally three times, and even oftener if the first two readings do not agree.

A better way is to use the aneroid during the preliminary parts of the work, and, having set it at any selected spot, (such as an end of the base, the crest line, or the lowest point of the ground), to note the levels of all the principal points

* For a difference in height of 25 feet, the difference in the barometer is about 0·0275".

visited during the triangulation and traversing. Opportunities are sure to occur during the work of revisiting several of these points, when, if the second readings agree with the first, it may be taken as pretty certain that the levels, not only of those particular points, but of all others recorded between the two observations, are correct.

For example: Suppose that the aneroid is set at any point A, and that the levels of any number of points B, C, D, E, are noted, one after the other in the order given, from a single observation. Then if a second reading of difference of level between A and E gives the same result as the first, we may assume that the single readings of the levels of B, C, and D are correct.

In this way a number of points in different parts of the ground is obtained, whose exact heights with reference to each other are known, and which not only serve as checks on the accuracy of the contouring, but are so many 'bench marks,' at any one of which the sketcher may ascertain if any change has occurred in the barometer, and reset it if necessary.

The crest line can now be sketched, and the orthogonals run far more rapidly than with the clinometer. Where the orthogonal lines are interrupted by quarries or clay pits, or similar obstacles, the instrument is specially useful, as it enables the correct level to be taken up after the obstacle is past. Also in dense woods, where the use of the clinometer is impracticable, but where, by interpolation here and there in the more open parts, and noting the levels of the points so found, the ground may be contoured with some approach to accuracy; and there are many similar cases in which the aneroid will be found a valuable aid.

In reading the aneroid, it should always be held in the same position, with the needle horizontal, and opposite to, and on a level with, the eye.

Though professing to be 'compensated,' it is said to be slightly affected by changes of temperature, and it is recommended to carry it in a pocket close to the body.

SECTION XVIII.

HEIGHTS, DISTANCES, AND AREAS.

Distances on the ground may be found, without using any instruments, by the following simple problems:

Problem 1. To find the distance from one another of two points, A and B, between which some obstacle prevents direct measurement (Plate IX., *fig.* 24).

Find a point C, from which you can pace direct to both A and B, and set a mark there. Pace the distance from A to C, and continue on the same line for an equal number of paces beyond C, *i.e.* so that CD = AC.

In the same way, pace from B to C, and prolong the line till CE = BC. Then the distance from D to E will be the same as that from A to B.

If the ground does not admit of pacing so far in the directions of D and E, take Cd = ½ AC, and Be = ½ BC; then de will equal ½ AB.

Problem 2. From B to find the distance of an inaccessible point A (Plate IX., *fig.* 25).

Lay off on the ground a line BC, at right angles to BA, of any convenient length.

Set up a mark D in the line BC, so that BD may be either equal to DC, or twice, three times, four times as long, or any convenient multiple.

From C lay down a line perpendicular to BC, and march along it till D is in a line with A, say at the point E. Then, if BD = DC, CE = BA: if BD = twice DC, BA will be twice CE, and so on, for any other multiple that BD may be of DC.

N.B. To lay off a perpendicular to BA, measure off 3 yards from B towards A, and drive in a picket (*b*). Make fast a cord to B and another to *b*. Measure off 4 yards on the former, and 5 yards on the latter, and, holding these points together in the hand, move towards C till both cords are stretched tight. The direction of the 4 yard cord will be perpendicular to BA.

If the ground does not admit of a line being taken perpendicular to BA, lay off a line BC in any direction, and of any length, that may be convenient (Plate IX. *fig.* 26), and prolong the line AB any distance to D. Lay off CE parallel to BD, and DE parallel to BC; and from E, where these two lines meet, observe what point in BC is in line with A. Let F be the point. Measure BF, FC, CE. Then BA is found by the proportion,

$$FC : CE :: FB : BA.$$

N.B. The lines parallel to BD and BC may be laid off as follows: Make fast a cord to C, and another to D: on the former measure off a length = BD, and on the latter a length = BC. Holding these two points together, stretch both cords tight. This gives the position of E.

The heights of objects, whether accessible or not, may be found, either without using any instruments, or by means of the simple clinometer used in contouring.

Problem 3. To find, without instruments, the height of an object EF, on level ground (Plate IX., *fig.* 27).

At any convenient distance from EF, set up an upright picket AC, about 3½ or 4 feet high. A few yards from it, in line with EF, set up another picket of the same height, BD.

Bring the eye down to C, and let an assistant slide a rod upwards, in prolongation of BD, till its top H comes in line between the eye and the top of the object F. Measure the height of H above D; also the distances AB and AE (which are of course equal to CD and CG). Then the height of EF is found thus:

$$CD : DH :: CG : GF.$$

Add to GF the height EG, which is the same as the height of the picket AC, and we have the total height of EF.

If EF is inaccessible, its distance from A will have to be found by Problem 2, instead of being measured.

If the sun is shining, the height of EF can be found very simply from the length of its shadow, thus (Plate IX., *fig.* 28).

Set up a picket AB. Measure its height, and the length of its shadow AC, also ED, the length of the shadow of EF.

Then AC : AB :: ED : EF.

Problem 4. To find, by the clinometer, the height of an accessible object, AB, on level ground (Plate IX., *fig.* 29).

At any suitable distance from the object, observe, with the clinometer, the angle of elevation of the top, and pace the distance to the bottom of it.

Draw a horizontal line, and set off on it, by scale, CA, the measured distance.

At A raise a perpendicular of indefinite length, and at C raise a perpendicular CE, equal to the height of the eye above the ground. Through E, draw ED, parallel to CA. From E, plot the observed angle, and draw the line till it meets, in B, the perpendicular raised from A. Then AB, measured by scale, gives the height of the object.

Problem 5. To find, by the clinometer, the height of an inaccessible object, AB, on level ground (Plate IX., *fig.* 30).

From any point, at some distance from the object, measure, with the clinometer, the angle of elevation of the top. Pace, in a straight line, towards the object, as far as the ground will allow, and again measure the angle of elevation of the top.

Draw a horizontal line, and, on it, set off, by scale, CD equal to the distance paced. At C and D raise perpendiculars, CE, DF, equal to the height of the eye above ground, and through the points E and F draw a line, which will be parallel to CD. From E and F plot the observed angles, and draw the lines far enough to intersect. Let B be the point of intersection, and from it drop a perpendicular on the horizontal line CD produced, meeting it in A.

Then BA, measured by scale, gives the height of the object.

N.B. In the above two problems, the full construction is given, to make them clear. In practice it is sufficient to draw a simple horizontal line (ED, or EG), to measure the distances on it, and plot the angles from it, and after measuring the heights, BD, or BG, to add the height of the eye, to get the total height of the object.

Problem 6. To find, by the clinometer, the height of an accessible object, AB, on sloping ground (Plate IX., *fig.* 31).

From any convenient point, measure, with the clinometer, the angles of elevation of the top of the object, and of a point on it the height of the eye above the ground, and pace the distance to the object.

Draw a horizontal line, EF, and plot from E the two observed angles, FEC, FEA. Make EC equal, by scale, to the measured distance, and, through C, draw the vertical line ACF.

Measure AC, and add to it the height of the eye, for the height of AB above the ground it stands on.

By measuring AF, and adding to it the height of the eye, the total height of A above the horizontal plane is found. [*See* Note to Problem 5. In *fig.* 31 the lines showing the full construction are dotted.]

Problem 7. To find, by the clinometer, the height of an inaccessible object, AB, on sloping ground (Plate IX., *fig.* 32).

Take a point on the object about the height of the eye above the ground. Observe, from any convenient spot, the angle of elevation of this point and that of the top of the object. Pace towards the object, as far as the ground admits of, and again observe the angle of elevation of the top.

Draw the horizontal line EF. From E plot the two angles first observed, FEC, FEA. On EC, set off EG, equal to the distance paced. From G, draw a short horizontal line GH, and from it plot the last observed angle HGA. From the point A, where EA and GA intersect, drop a vertical line ACBF.

Then AB, measured by scale, gives the height of the object from its base, and AF + height of the eye, gives the height of the top above the ground on which the observer stood when taking his first observation.

AREAS OF SIMPLE FIGURES.

The area of a rectangle is found by multiplying the length by the breadth. Thus, area of ABCD = AC × CD (Plate IX., *fig.* 33).

The area of a triangle is found by dropping a perpendicular from any one of the angles on the side opposite to it, multiplying together the lengths of the side and the perpendicular, and taking half the product. Thus, area of ABC = ½ (BC × AD) (Plate IX., *fig.* 34).

By this last rule, the area of any figure bounded by straight lines can be found, for any such figure can be divided into triangles, and the area of each calculated separately. All these areas added together will give the area of the whole figure (Plate IX., *fig.* 35).

To drop a perpendicular from an angle of a triangle on the opposite side, on the ground :

Make fast to a picket at the angle a rope, a little more than long enough to just reach the opposite side. Taking hold of the end, describe an arc with it, marking the two points where it cuts the side. The perpendicular will meet the side exactly midway between these points (*see* Plate IX., *fig.* 34.)

PART II.

RECONNAISSANCE.

INTRODUCTORY.

THIS manual is designed for the use of Regimental Officers.

At page 109 will be found notes for the instruction of non-commissioned officers of Cavalry, Infantry, and Artillery.

A Military reconnaissance means the process of obtaining information respecting, 1st, the enemy; 2nd, the country in which military operations are to take place.

The more important reconnaissances would probably be carried out by staff officers, but every officer should be able to take at least a subordinate part in this work.

Reconnaissances of *the enemy*, and reconnaissances 'in force,' will be treated under the head of Tactics in another manual.

This treatise will deal only with the duty of reconnoitring *the country*.

Part I. explains how to make a military sketch; Part II. will show how to apply this knowledge practically, for the requirements of war.

On service Commissariat officers, and others specially selected, would probably gather information about 'supplies;' a few notes, however, upon this subject and 'accommodation' are given in pages 108–9 for the use of combatant officers employed on this duty.

SECTION I.

TOPOGRAPHICAL RECONNAISSANCES.

It is not generally necessary for an officer to sketch the whole of the country that he is to reconnoitre—there may not be time for this in war. But it is essential that he be competent to sketch, to enable him to give details, and the principal points of his reconnaissance.

To abridge this operation, before proceeding to the ground, he can, from a correct map of the country, fix the situations of towns and villages, roads and large rivers, on a scale susceptible of details, and afterwards sketch in the ground while passing over it.

Existing maps to be utilised.—In the present day maps of most countries are procurable; these might be rapidly multiplied on an enlarged scale by means of photozincography, or some other process, and as many copies as required issued to the troops.

But maps merely enlarged give no fuller information than before; all further details must be put in on the ground by the reconnoitrer.

Many old maps and some new ones cannot be trusted. Hills remain unaltered, but rivers do not; marshes disappear, old woods are cut down and new ones spring up; railways, villages, and roads come into existence or change their character, and hence it becomes necessary to test the accuracy of existing maps before depending upon them, as incorrect information purporting to be true is often worse than none.

Maps to be tested.—A map may be tested thus: Draw three or four straight lines across its face at random. Observe what features (hills, woods, bridges, cross roads, villages, &c.) each line cuts through, and compare these with what you actually observe on the ground. If a map stands this test its general character is usually correct.

Necessity for written information.—Even a rough sketch conveys at a glance an idea of the form of a hill, the direction of a winding road or river, and the shape of an irregular wood,

better than elaborate writing can do. But it is not possible to convey all needful information by means of conventional signs, which, if unduly multiplied, would prove distracting. Hence it appears that in most cases information must be recorded partly by drawings and signs, and partly by *written matter*.

To do good work in a short time, it is important to distinguish between what is necessary to be drawn or noted for military purposes, and what is unnecessary. Minuteness of detail is not always required, though fair accuracy must be. If circumstances do not admit of fair accuracy, the fact should be stated.

Amount of 'details' depends upon circumstances.—As to the amount and nature of detail, much will depend upon the object of the reconnaissance.

For example: It might be all-important to show the exact shape of a hill when reconnoitring a position for defence, though the same hill need be merely indicated in reconnoitring for a route march. And, on the other hand, for a march, it should be shown that a certain pond cannot be used for watering horses, because it lies in an old quarry with high perpendicular banks, and yet this same fact might be wholly immaterial in reconnoitring a position for defence.

Again, in a defile or very woody country, or in a long straggling village, it may be necessary to show the bends of a road with all correctness; but in an open level country this would not be required, as the whole road is practically under view, or fire, even though it may bend a little.

These examples will serve to show that circumstances must decide as to minuteness of detail.

Division of labour.—One and the same officer is seldom required to report upon all the roads, rivers, villages, woods, railways, &c. found in a large district. The work is usually divided amongst several reconnoitrers on the principle briefly explained in page 105. But it is very useful for an officer to consider what observations he may with most advantage habituate himself to make, so that, under all conditions of ground, he may recognise the essential features.

Practice necessary.—He should *practise* his eye to judge distances, to appreciate slopes, to estimate quickly relative heights, and to take in all that comes within his range of vision. Soon he will come to do this mechanically without much effort. A man who takes the pains to learn how to draw with his fingers what he sees with his eyes, will come to notice on the ground many more particulars—and these more accurately—than he who puts nothing down on paper.

Measuring distances by eye can be much improved by practice. With good eyesight, on an ordinarily clear day, it is generally admitted that the following objects should be distinguished on the skyline :

At a distance of	10	to	12 miles,	church spires and towers.
,,	5	,, 7	,,	windmills.
,,	2	,, 2½	,,	chimneys of a light colour.
,,	1¼		,,	trunks of large trees.
,,	⅔		,,	single posts.
,,	600	yards		window panes.
,,	250	,,		roof tiles.

(*see* p. 264, 'The Duties of the General Staff,' Von Schellendorf, translated by Lieut. Hare, R.E.)

For practice, *the beginner should observe every detail and jot it all down on paper*, though at first he spends much time in doing so. When he becomes better acquainted with the subject, he will know what information to record, and what may be omitted. It takes a clever artist to hit off a likeness with a few strokes ; and it is only the reconnoitrer who has accustomed himself to observe everything who can compile a pithy report, and dash off quickly an illustrative military sketch.*

We would caution a beginner not to be disheartened because he must do many things at first which he could not do on service, for by the time he is employed in war he will no

* A remarkable and instructive example of rapid sketching is given in the 'Aide Memoire,' vol. i. p. 533, which describes how Lieut. Bainbrigge, during the Peninsular War, accomplished a sketch of eight or ten square miles of most difficult country, near Salamanca, and partly under the enemy's fire, in less than three hours.

longer require these helps, needful though they be to the inexperienced.

Reconnoitring should first be practised on foot, afterwards on horseback (*see* Instructions for N.C.O.'s., page 109).

Reconnoitring on horseback.—To be an efficient reconnoitrer an officer should be at home in the saddle; able to ride across country and through difficult ground without having his attention distracted from his work. His eyesight should be good, observation quick, and his physique such as to enable him to ride far without flagging.

It should be remembered that the variation of the compass is different in different parts of the world. The amount should be ascertained beforehand—it is published by the Admiralty, periodically in a chart. In the late expedition to Ashantee the variation of the compass was mentioned in the Q.M.G.'s instructions.

The reconnoitrer should be provided with good field glasses, sketching case,* spare paper, prismatic (or common) compass, protractor (with scale), two lead pencils (HHH and F), red, blue, and green chalk pencils, penknife, india rubber, and note book.† A piece of stout string about ten yards

* Most sabretaches are inconvenient for use as sketching cases. The Staff College cases are too large and too heavy. The 'Woolwich pattern' sketching case is a serviceable article—to be procured from Messrs. Wickwar, 6 Poland Street, Oxford Street, London, price 11*s*. The metal rim should not be of iron, which affects the compass if laid upon it—copper or brass would be better, though heavier and more expensive. A piece of strong millboard, or the back of an old book, with two common india rubber bands to fix the paper, answers the purpose very well, especially if a waterproof cover is also provided. The sketching case should be capable of being slung over the neck to free the hands, and to prevent the chance of its being dropped when reconnoitring on horseback.

† A useful memo. book for field service, which may be also used for sketching, may be bought at Messrs. Newman's, 24 Soho Square. Certain headings are printed on each page to facilitate the despatch of orders in the field. Paper, best bank post, ruled into squares, representing 100 yards each on the 4″ scale. This tough thin paper admits of a very good copy of the original drawing or writing being traced through by means of black lead paper.

long, with knots at every yard, is useful for sounding, measuring bridges, &c.

The reconnoitrer should clearly understand what he has to do, before starting, and, when practicable, he should take a map of the country with him. Lastly, he should know his horse's paces at a trot and a walk (*see* page 114, note *).

SECTION II.

RECONNAISSANCE OF A ROAD.

Colonel Hamley in 'Staff College Exercises' says:—'The actual sketching of roads is a valuable exercise, as a preparation for the contingency of operations in a country of which no maps exist, and important service of this kind was rendered by trained officers in the late operations on the Gold Coast.'

A road reconnaissance is the best to begin upon. It is the most illustrative of the subject, the easiest to carry out by rule, the commonest required, and the most generally useful in reconnoitring a district.

When no map is available the road must be 'traversed' (*see* page 20, Part I.)

Scale.—The best scale, for practice, is 4″ to 1 mile; for service, 2″ to 1 mile,* or 1″ for long rapid reconnaissances.

Details.—Mathematical accuracy is not required. Fences between fields seldom need be accurately drawn—it is enough to indicate that fences exist.

Small detached houses, insignificant in themselves, may serve as useful guides for the march of troops—they should be put in.

Public houses and inns which bear a name, whose whereabouts is known throughout a district, should be shown as P.H., with name noted. Frequently these names will prove more useful when inquiring one's way, than the names of hills and hamlets as given in old maps—especially in England.

* Very expert and neat-handed draftsmen can show almost all that is necessary on the 1-inch scale, but for ordinary persons this is too small for a field sketch.

Ground adjoining.—An ordinary road sketch should indicate the ground on either side for about ¼ of a mile, on a large scale, and ½ mile or more on a small scale, and this can in most cases be done without quitting the road. Occasionally notable points, much farther distant, must be put in, by taking cross bearings upon them—for example: a conspicuous church, a village, railway station, bridge, or a remarkable hill.*

Woods.—When a road runs through a great wood, if the outer boundary of the wood is not examined, it should be so stated, lest a wrong idea may be conveyed as to its extent.

When the fences enclosing a road widen out, and continue so for some miles, leaving a space of 10 yards or more between them and the road, the fences should be drawn as at B, *fig.* 1, Plate X., as this space would allow marching room, or a shunting place for troops.

Gradients.—In every road sketch, the positions of steep inclines, up or down, must be indicated. A very few lines properly drawn will show these slopes, as explained in Part I. (Also *see* Instructions for N.C.O.'s., page 109).

It is found useful to draw a bold line right across the road at the end of every mile.

The above remarks apply to reconnoitring on service; but for practice, and whenever great accuracy is essential, the instructions contained in Part I. must be carefully carried out.

SECTION III.

THE REPORT.

By 'The Report' we mean all the information that is conveyed in *writing*. This may appear either (1) wholly on the face of the sketch, or (2) on a separate paper, or (3) part on the sketch and part on separate paper.

In favour of (1), only one paper is required, and ready

* The reader will probably remember how the two lone trees guided the march of an army corps before the battle of Koniggrätz. And a church spire did like service at Bautzen.

reference can be made from sketch to report and *vice versâ*. But it is sometimes difficult to avoid confusion if much has to be written, unless it is to be interpreted by the reconnoitrer himself, same as shorthand writing.

In favour of (2), a fixed Form of report may be settled, suitable for all conditions of ground. But there is the disadvantage of two separate papers being always required, which it is difficult to manipulate especially on horseback in windy weather. Besides, it will often happen that all the information may be jotted down on the face of the sketch without confusion.

The best rule seems to be, to put on the sketch all that is practicable, and to use separate paper only when absolutely necessary.

The Director-General of Military Education has issued the following

Instructions for all Reconnaissance Sketches accompanied by written Reports*:

'The Sketch to contain all necessary information which can be put in without confusion.

'The written Report to be supplementary to, and explanatory of, the Sketch, to be framed strictly in accordance with the Instructions for Arrangement (*see* page 79), and to convey necessary information with the utmost conciseness.

'To be written on foolscap, half margin, on the outer half only, in paragraphs according to Instructions for Arrangement; the whole of the inner margin to be left blank.

'Necessary references connecting parts of the Report with parts of the Sketch in capital letters, A,B,C, &c.

'The Sketch to be attached to left hand of inner margin of Report at top and bottom, loosely with tape; the bottom of Sketch level with foot of Report.

'The Report to be headed by a title, and signed with the officer's name, and dated.

'The title and signature to be clearly written on the back of the Sketch.

* These are drawn up for officers 'under instruction,' to teach them to systematise their Reports.

'The Instructions for the work to be appended to the last sheet of the Report.'

In addition to the foregoing Instructions the following may be added:

Names should be correctly spelt; sometimes it is useful to add the phonetic spelling of names. A very experienced staff officer strongly recommends that names of persons or places should always be written in Roman characters. Writing to be legible. Reference to be made to 'North,' 'South,' &c., rather than 'right' or 'left,' except in the case of river banks. Assertions that a river is impassable, a country inaccessible, a position impregnable, or roads impassable, should only be offered on most accurate information, and, if not from personal inspection, the authority must be given. Bear in mind that such expressions as 'wild,' 'flat,' 'hill,' 'mountain,' &c., are relative terms, and do not always convey their meaning, as a 'mountain' in one country might be described as a 'hill' in another.

Instructions * *for the Arrangement of Road Reports.*—'1. The Roadway—General directions, as N., N.E. &c., Nature—hilly or otherwise—state the average gradient and the greatest gradient, with extent and locality. Construction—metalled or not—present condition, and material for repair obtainable. Width, in feet, of carriage way. Bridges and fords (fully) *seriatim.* Hollow ways, defiles, &c. Streets—in villages and towns on the road.

'2. Country—General nature of the country in which the road lies—whether in a valley, hilly ground, cultivated land, &c. Nature of contiguous fences—facilities for moving on particular fronts of formation. Woods, especially such as are near the road.

'3. Halting places—including facilities for watering—and shunting places, where part of the column at need could pass by that part in front of it.

* These have been issued by the Director-General of Military Education for officers 'under instruction.'

'Camping grounds, or suitable Bivouacs, and for what force.

'5. Positions on, or adjacent to, the road, suitable for the advanced guard.

'6. Nature of the position, within range of the road, which the enemy might occupy (these to be judged of as seen from the road).

'7. Lateral communications (if not reported on separately). The Report on these includes the points where all roads or tracks practicable for any arm join the roads traversed by the column; and information respecting them, as detailed above, for the roadway only.'

With reference to the foregoing Instructions, and a few other matters not directly mentioned therein, the following remarks are offered:

1. *Gradients* of 5 degrees and upwards should be accurately given, with their position and extent. Slopes steeper than 8 degrees are almost impassable for heavy baggage wagons without extra horses. Guns can ascend slopes of 16° or 17°.

Construction, whether macadamised (with stones broken into angular pieces), or gravelled, or paved—all coming under the term 'metalled.'

Condition, good, fair, or bad—the whole or in part. Whether heavy (as sandy soil would be in dry weather), or sticky (if the soil is clay and the weather wet). Whether drained on either side. Unfenced roads running along steep hill sides are liable to wear away on the outer side. Mention whether bad parts may be avoided by following another route near by.

Materials for repair.—Loose stones from neighbouring quarries or from stone walls; wood fences, hurdles, brushwood, or small pine trees (as in the 'corduroy roads' in America), may be used to repair, and should be mentioned when likely to be required.

Width (in feet) ought to be 20 feet for the free and convenient passage of troops. Minimum limit is the breadth

required for the passage of guns, singly in 'column of route,' which is about 9 feet and more at sharp bends. The axle-trees of gun carriages are 6¼ feet long. Portions of road, differing very much in breadth from the average, should be noted. Sometimes the exact measurement should be given of the open space where roads cross, as at A in *fig.* 1, Plate I., to show whether two columns might march simultaneously, one from B to C, and the other from D to E, without clashing.

Bridges.—Their material, whether brick, wood, stone, or iron; breadth of roadway, length, number of spans, nature of piers; whether passable and safe for all arms. A bridge strong enough for infantry to pass four deep will bear cavalry in file, and guns singly. When a *low* bridge crosses *over* a road, its height should be given, lest it might unexpectedly obstruct the passage of wagons piled up with baggage (*see* page 88).

Fords—(*see* page 88).

Hollow ways and defiles.—Long cuttings of 8 feet deep and upwards should be shown by the regular conventional sign and their peculiarities noted. At these points the roadway is usually narrower and the bottom bad from water lodging there. The break down of one baggage wagon in a long deep cutting might occasion great trouble and delay, and a column attacked in such a position would be placed at a serious disadvantage. If there is an easy way out of a deep cutting at one side, it should be noted.

In a *large defile*, describe the character of the ground in front and in rear, as well as the defile itself. Give its length and width, and the facilities for crossing it transversely. When the flanks are accessible but covered, describe the nature of the flanks, the communications which cross them, and those which abut on the defile itself, with the view to taking up a defensive position if attacked.

Embankments should also be noted for reasons similar in principle to those mentioned above. Note their height and steepness, and whether they are made to avoid a deep descent (bridging over a gulley), or as a causeway through bad, marshy ground.

Streets.—Whether narrow, tortuous, or obstructed (*see* 'Villages,' page 97).

2. *Country.*—General nature, hilly or level, woody or bare. Soil, gravel, clay, sand, chalk, rock, &c. Pasture or arable, and nature of crops.

Fields.—Large or small.

Fences.—Those bounding the road or dividing fields, whether generally small or large, whether banks, ditches, walls, post-and-rails, &c.; whether presenting an obstacle to movement, or affording cover, or both. Unfenced roads running through a marsh or bog to be drawn as 'unfenced;' but the conventional sign for 'impassable for cavalry' (infantry, &c.) should be marked on adjoining ground according to circumstances, so that, when no such sign appears, the ground is to be considered passable for all arms.

Woods.—Nature of the trees, and whether passable for all arms (*see* page 92).

3. *Halting places.*—Best where there is dry grass or heather, trees or other shade in hot weather, road unfenced, water at hand, not in a village, space for troops on one side, so that ordinary traffic may not be impeded. When the enemy is near, many other points must be considered.

Shunting places.—Best where road is unfenced or very broad, with good ground on one side; or the troops may pass into an adjoining field through openings in a fence and out farther on, to avoid counter-marching; or may make a short detour by a branch road.

4. *Camping grounds*—(*see* page 97).

Bivouacs—(*see* page 102).

5. The consideration of '*positions suitable for an advanced guard*' is best treated under the head of Tactics. The object is to note positions near the road to which an advanced guard might push forward, or upon which it might fall back if attacked by the enemy. Clearly it would be a great advantage for the commander of the advanced guard to know this beforehand; he would move with greater confidence, and would play his part with better effect.

6. This too ('position for the enemy') comes under

the head of Tactics, and will not be entered upon in this manual.

7. *Lateral communications*, if connecting two routes both of which are to be used, should be reported upon in sufficient detail to show how far they are available for the passage of troops from one to the other. If a cross road leads both to a village near and to a town far off, note the distance of each, which may be ascertained from sign-posts, milestones, inhabitants, &c.

8. *Water*—(*see* pages 92–7 and 99). When water is scarce, note in detail that which is available for the use of men, horses, and cattle on the march. Whether the banks are too high, or too marshy, or the bottom too deep in mud; or, if artificially made, whether too fragile to allow horses to get into to drink. Level of water should never be more than 3 or 4 inches below the horses' feet if standing on the bank. Deep pools with high perpendicular banks may be used for watering when there are portable pumps and buckets with the troops; but this is a slow process. Troughs are very useful: they may be made rudely of planks, taken from the wooden flooring of houses near by. A small and shallow stream, if dammed, may afford a good watering place. State the number of horses that can be watered at one time, allowing a front of one yard for each along the space available.

Rivers and water considered as an *obstacle* may be noted as explained in pages 85, 90–1.

Marshes; whether wholly impassable, or, if not, describe pathways across, to be learnt from inhabitants and personal inspection. Quantities of rushes or rank grass in a dry place near water are indications of marshy ground in wet weather.

9. *Railways and Telegraphs*—(*see* pages 93–7).

10. *Miscellaneous.*—Note the position of forges, bakers' ovens, corn mills, and wheelwrights on or near the road; also large houses suitable for headquarters, staff, or hospitals.

Notes on the points above mentioned may be readily made on the ground as explained in page 67. From these

short notes a full report may be drawn up on returning to camp or quarters.

Written notes on face of sketch.—A beginner should next take his original sketch (not the fair copy), and write upon it in pencil (for practice) as much of the information contained in his notes as may conveniently appear without confusion, and without writing in too small characters, but making free use of abbreviations. Each particular should be written, as nearly as practicable, opposite to the corresponding point on the sketch; and when this cannot be done conveniently, a fine line should connect the note with the corresponding point on the sketch (*see* Plate XI.) All *general* information, which applies to the whole sketch, should be collected together and placed, if possible, at the top of the sketch.

When the learner has been taught what to note down, a new example should be executed on fresh ground, when information is to be noted on the sketch itself at once, and a fair copy of the whole afterwards made indoors, on the same or a smaller scale (*see* Plate XII.)

The reconnoitrer must use his judgment how far to enter into the details already explained. The orders he receives will usually decide his course.

Scarcely any allusion has been made to 'the enemy' in the foregoing remarks, as this phase of the subject is best treated under the head of Tactics.

A road sketch may be required for a simple route march, when the enemy is far off and need not be considered. In this case many of the points before mentioned need not be alluded to.

A reconnoitrer will show his intelligence and knowledge of the subject by giving just that information which is needed, and no more.

Practice in drawing hills as seen from the road, without leaving it, is most useful, and may be accomplished with less difficulty than at first sight would appear.

SECTION IV.

RECONNAISSANCE OF A RIVER.

When an original sketch of a river must be made, there frequently arises the practical difficulty of walking or riding along its banks. Walls, tributary streams, private grounds, &c. obstruct the observer's movements, though on service some of these difficulties would disappear.

When the bank cannot be traversed as a road, the bends of the river may be put in by cross bearings, or by taking offsets.

On still water the river may be sketched from a boat—the average length of each stroke being known. But the most accurate method is for one observer to go by land, the other by boat, noting the particulars by the way, the two approaching one another now and then.

The general direction of a river may be traced for long distances by the eye, even though the water itself be not visible, by observing the rows of willows or reeds lining the banks, or by noting the position of the bridges.

The principal objects of reconnoitring rivers may be classed under two heads : First, when the course of the river is in the direction of the 'line of operation'—the object of the reconnaissance being then to show how connection may be maintained on the march, or for action, by a force moving on both sides.

Second, when the river is to be used as a defensive obstacle.

Under the first head the following points should be reported on :

1. General nature of the valley in which the river lies.
2. Nature of the stream itself.
3. Tributaries.
4. Bridges, fords, and their approaches.
5. Other points at which passages of the stream may be made practicable.
6. Boats.

Under the second head in addition to the above :

7. Nature of approaches, and how they may be barred.

8. Heights on either side.

9. Inundations.

10. Points on either bank suitable for covering the passage of troops.

The foregoing headings will now be explained in detail.

1. Valleys usually widen towards their mouths. Valleys descending from the centre of a ridge of hills usually run at right angles thereto ; those descending from the extremity of a ridge radiate like a fan.

The bank which is on the right hand of an observer looking *down* the stream is called the 'right bank ;' the other the 'left bank.'

Roads running parallel to the river should be noted, as well as means of access from them to points on the river banks. These may be examined on the return journey after the river itself has been reconnoitred.

Report whether the valley generally is wide or narrow, swampy, rocky, wooded or open.

2. 'Nature of the stream' includes its average *breadth*—which may be estimated roughly by eye, or more accurately by methods explained in page 65, Part I. Streams, with low banks running in wide valleys, vary in breadth in different seasons, from overflows—a liability to which may be inferred from the presence of rushes or marshy ground in the ground adjoining, and from stray bits of drift wood and weeds washed into the branches of river-side trees.

Note how far the river is *navigable*—between what points, at what season, and for what class of boats. Also what dangers may be encountered in the way of sandbanks, sunken rocks, eddies, &c. This information is particularly desirable when barges have to be towed from the bank.

Quality of water to be ascertained by personal investigation (*see* 'Camping Grounds,' page 99).

Note whether the river is liable to be *frozen*, and to what

extent. Ice three inches thick bears infantry in small detachments ; four to seven inches bears cavalry and light guns.

Depth.—If fordable, details to be given (*see* 'Fords,' page 88) ; but if otherwise, note average depth, to be ascertained by inquiry on the spot, or by sounding with measured string from a boat or bridge (though the latter is rather deceptive) ; or a string with a stone tied to the end may be thrown into the river from the bank and allowance made for the slanting direction.

A stream being rapid—unless after a freshet—indicates little depth. If the river be liable to floods, give maximum depth ; if liable to become dry, give minimum depth. The former may be ascertained by inquiries and by observing marks left on bridge piers and posts.

If a stream bends suddenly it is deepest on the outside of the curve and shelving on the inner side.

Bottom, or *bed* (*see* 'Fords,' page 88).—If at a point suitable for a military bridge, state whether the bed is even or rough, hard or soft, shifting sand, firm and level rock, of equal or varying depth across ; and if any deep holes are discovered, state where they are. Torrentuous streams are likely to have rocks or boulders in their bed, whilst streams with clay banks have a soft, muddy bottom.

Banks are steepest in swift streams. State average height above level of water. Whether steep, shelving, slippery, sticky, marshy, or firm. Which bank commands the other, and to what extent. What points are hidden from view and likely to be used for bridges by the enemy. What facilities for cutting ramps to allow horses or carriages to enter the water. Whether the banks are lined with trees interfering with towing. Whether regular towing path exists, and on which side.

Current.—Upon this depends (1) the rapidity of forming an inundation, or reservoirs for drinking purposes ; (2) difficulty in forming bridges and fording.

The 'surface velocity' may be calculated by throwing a piece of heavy wood into the middle of the current (a light object would be affected by wind), and noting the time it takes to travel a known distance—say 100 or 200 yards.

If the current runs at the rate of

1 mile an hour, or 100 yards in 3′ 24″	the stream is termed	sluggish.
2 miles an hour, or 100 yards in 1′ 42″	„	swift.
3 miles an hour, or 100 yards in 1′ 8″	„	rapid.
4 miles an hour, or 100 yards in 51″	„	very rapid.
6 miles an hour, or 100 yards in 34″	„	a torrent.

When considering *floating* military bridges, the 'surface velocity' should be known. When considering the nature of the bed, the velocity at bottom should be known. When calculating the amount of discharge, the 'mean velocity' should be given, which is in ordinary cases $\frac{4}{5}$ of surface velocity.

Islands should be shown on sketch. Give their size and description; whether wooded, bare, or marshy. Whether the opposite bank can be seen over them.

Canals.—Whether for irrigation, navigation, or draining wet lands. Give width, depth, slopes of banks; tunnels, cuttings, and enbankments. *Locks*, their length, width, drop of water, how destroyed and the probable effect. Time taken to fill and to empty the lock.

3. *Tributary streams* usually run into the main water-course obliquely. Note their width and how they may be crossed, and how far navigable.

4. *Bridges.*—Whether fit for all arms, and in what formation, as, 'infantry in fours,' 'cavalry in half-sections,' &c. Present condition, construction, material, length and breadth, number of spans, and thickness at crown of arch. Also nature of the piers, with a view to their hasty demolition or repair. If destroyed, the nearest other passage and how reached. Facilities for fording river near bridges, so as to prevent a column, passing over on the line of march, being lengthened out by the narrowness of roadway at bridge. Under which arch it is best for boats to pass. If the arches are low (less than 9′) or narrow, give dimensions, in view of loaded boats passing through.

5. *Fords.*—Their exact position. Any peculiar marks on the banks by which they may be readily found. Their length, breadth, and nature of bottom—whether sand, clay, gravel, or rock. Fine sand becomes hollowed out by horses' feet

passing, the loose stuff is carried away by the current, and the ford deepens. Whether quicksands form in ford, rendering it unsafe. Describe approaches to ford; nature of landing-places on either side; velocity of current; liability to deepen through rise of tide or floods or opening of sluice gates above. Show in sketch the configuration of the ground on both banks, and height above water. *Depth* at ford for cavalry not to be more than 4′ 4″; for infantry 3′ to 3 6″, according to strength of current; for guns and ammunition wagons 2′ 4″.

Fords may be expected at the mouth of widening portions of the river (*see* Plate X., *fig.* 2), or from one sandbank to another between which the current is very strong, or obliquely across a winding stream between two inner curves B, B (as at Plate X., *fig.* 2). Roads and cart or cattle tracks, leading into a stream on one side and out on the opposite bank, indicate fords. In hilly countries fords are frequently obstructed by large stones, inconvenient for horses and impracticable for carriages. In moor and heath countries the bed is often fine and shifting sand, dangerous and changeable—when fascines loaded with stones may be laid down to render them safe. The best bottom is coarse gravel.

'Always examine fords by crossing them yourself several times, backwards and forwards, and do not trust to reports of inhabitants regarding their non-existence.'

In seeking for a ford, if there are no indications as before mentioned, the best plan is to ascend or descend the river in a small boat, provided with a short lead line and sounding pole.

It may be useful to remember that a ford in a deep and rapid river may be crossed if a heavy stone or other weight be carried, which would be dangerous without.

A ford at best is an inconvenient and often an uncertain means of crossing a river. When neither fords nor permanent bridges exist, temporary bridges must be constructed. The reconnoitrer should report upon the positions most suitable for these.

Positions for Military Bridges.—A bridge is most easily defended when it is (1) out of view of the enemy; (2) in a re-entering bend of the river; (3) where the defenders' side commands the other; and (4) when there is an open space on the enemy's side, so that he may be exposed to fire.

In all cases, at the points selected the banks should be firm, the approaches sound, not cramped, and not liable to be flooded, the river narrow (if not too deep), and the current slow. It is a convenience if the banks are level with the roadway of the bridge when constructed, but ramps may be cut if required.

Islands should be used as stepping-stones across.

Always give an accurate drawing on a large scale of the section of the river where it is proposed to construct a bridge (showing banks, bed, and level of water, with probable rise or fall).

If the river be broad and deep, a floating bridge of some kind will probably be best. Note character of anchorage up-stream, and down-stream also if in a tidal river. A tributary stream near by may be used to float the piers, &c. from the place where they are constructed safe from the enemy down to the point of passage. The river should not be too shallow near the banks, as it would be inconvenient if the pontoons, boats, casks, &c. were grounded.

If broad and shallow, the supports or piers would rest on the bottom. Select a spot where the bed is sound and even.

If narrow and deep, and such as might be spanned from one side to the other by some kind of spar bridge, select a place where the face of the banks is sound but not rocky, affording a good bed for the butts of the standards to rest on. The height of the banks does not signify, as a truss bridge might be used for low banks, and a lock bridge (double or single) for high.

Ferries.—Position of, size, number, and nature of boats, and how propelled across stream—by steam, ropes, or oars. Whether horses and carriages can be loaded from the banks.

6. *Boats.*—Average size, nature (whether flat-bottomed),

strength, and condition, and number procurable. Even small boats, if strong and not too slight in the gunwale, may be used for bridging. Whether any river steamers (for towing) and large barges are available. What materials at hand for rafts: such as trees, wood from timber yards, house rafters or beams, casks, &c., and their exact whereabouts.

7. In reporting upon the nature of *approaches* and how they may be *temporarily barred*, bear in mind that narrow deep lanes are easiest to obstruct, by cutting down trees and laying them across; also by cutting deep holes and trenches across and letting in the water from the river.

8. *Command*, and distances, from stream, of *heights* on either bank to be given carefully at points within firing range of passages across the river—at other points the information is required in general terms only.

9. When noting places suitable for *inundations*, remember that inundations are usually wide, but shallow, on broad level ground, and limited in extent, but deep, in a narrow valley. A railway embankment across a valley will form a dam if the bridge be blocked with stones, weighted faggots, trees, and clay.

Sometimes the river level is above the level of the country, the water enclosed between artificial banks—in such cases an inundation is easily effected by cutting through the bank.

On ground liable to a natural inundation, note all raised causeways, and the safest route to follow (by known landmarks) when there is no dry land.

Note position of sluices and weirs.

On level ground an extensive inundation, 2 feet deep, presents a serious obstacle, unless the roads are very sound and their directions marked by trees, posts, &c. Lines of telegraph posts frequently indicate direction of main roads, and a slight dip of 3 or 4 feet might render these roads impassable. A railway inundated soon becomes dangerous,

the water undermining the rails by washing away the ballast under the sleepers.

When a large level district is covered with water, the direction of streams running across should be known—this may be inferred from the position of bridges, which may be seen from a distance.

SECTION V.

RECONNAISSANCE OF A WOOD.

First follow the principal roads through the wood; then skirt round the edge, and follow along ravines and streams leading into it, and observe all that can be seen from the highest ground within the wood and outside. Carefully note character of country at the entry and exit of roads.

Examine nature of trees; whether all arms can march through the wood itself, or only along the roads—and, if the latter, state the reason, whether because of underwood, or marshes, or the trees being too closely planted or their branches too low.

Note all large open spaces, and show them on sketch. Also whether practicable to open up new routes by cutting through narrow patches of wood. Whether roads easily blocked by felling trees.

Note whether edge of wood is clearly defined or otherwise.

Where there are no roads, note the remarkable trees, rocks, towers, &c., which might serve as landmarks for troops on the march, giving compass bearings from these on known points. When the tracks are badly marked at cross roads, give compass bearing of route to be followed—the trees may be marked by chopping off slices from the bark to indicate the route.

All villages and water inside the wood must be reported on. Also points from which a good view may be had of surrounding country. Carefully note where every road leads to, and its distance (*see* Plate XIII.)

SECTION VI.

RECONNAISSANCE OF A RAILWAY.

1. Report upon capabilities for conveyance generally—the rolling stock, engines, passenger carriages, goods, and cattle trucks—their dimensions (including height of covered wagons), condition and numbers.

In England 1st class carriages, with 3 or 4 compartments, hold 18 to 24 men; 2nd and 3rd class, with 4 or 5 compartments, hold 32 to 40 men with their arms. Average length 20 feet.

For English traffic all arrangements are made for smaller trains and higher speed than for Continental.

Calculation for conveyance of troops by rail in England, on war strength:

A Battalion of *Infantry* requires 2 trains of about 23 vehicles each, including horse boxes and break vans. If regimental baggage wagons and draft horses are included, add 10 to 12 trucks per train to above estimate.

A Regiment of *Cavalry*, with its wagons, requires 4 trains of 34 carriages each.

A Battery of *Artillery*, complete, requires 2 trains of 32 carriages each.

Carriage of supplies.—A goods truck carries 1 ton straw, or 1½ ton hay, or 5 to 7 tons coals, or 6 to 9 head of cattle, or 30 to 40 sheep, or 2,000 rations bread, or 7,000 rations flour.

An *engine* drawing a heavy load consumes 100 cubic feet, or 660 gallons water, and 8 cwt. pit coal per hour. From these data may be calculated requirements of coal and water at a station.

2. *Stations* (*see* example, p. 94).—Mention its name. A great object to be obtained in the movement of large forces by rail must be to increase the facilities of embarking and

disembarking* to the utmost; and these mainly depend upon the arrangements of the stations, and the size and nature of the platforms.

Platforms.—There should be ramps at the ends, with easy access thereto for horses; and baggage wagons should be able to be entrained on the trucks without unloading. Remember that horses require platforms, permanent or temporary—men do not.

Platforms should be 20 feet wide, and long enough to take in the whole train. Note the length, breadth, height, and material of platform.

Platforms are most useful when troops may be entrained, &c. without interfering with the 'through traffic,' so that the main line may be kept open for other trains to run through.

Note also length available for entraining guns and wagons at other places—and facilities for erecting temporary platforms, in continuation of existing ones, or at new places; this is easy if the station is on the level, and the ground not swamp.

Report length and number of sidings, switches, turntables, 'crossovers' (by which men may cross while trains are running), cranes, water and coal supply.

Also whether any large storehouses or sheds are near, to be used as depôts or as hospitals for men who cannot continue their journey.

Whether facilities for supplies of hot water† for coffee, &c. during temporary halts, and water and buckets for horses.

The following report on Staines Railway Station (*see* Plate XIV.), London and South Western Railway, is given as an example‡:

* The terms 'entrain' and 'detrain' may conveniently be substituted for 'embark' and 'disembark,' as suggested by General Hamley in 'Staff College Exercises.'

† The Germans used hot jets of steam injected from the engines into cans for heating water for coffee, &c.

‡ The particulars given in this example do not profess to be strictly accurate; they were collected and the drawing made in about an hour, under very disadvantageous circumstances.

Platform.—'Down' 160 yards long by 3 to 4 broad. Earthen, gravelled, faced with brick, 1½′ above rails, 2½′ above road—difficult to widen, impossible to lengthen.

Entrances—at A (10′ gate), with ramp—at B (4′ gate). Both could be widened and ramps made. Roof over platform supported by pillars.

If paling removed, wagons could be conveniently unloaded from the road on to platform.

'Up' 110 yards long by 4 to 5 broad—earthen, gravelled, 2′ above rails—might be lengthened westward.

Entrances F, F (4′ gates), both might be widened. Slight ramp west end, but very narrow at M. Pillars on platform supporting roof.

Sidings (clear of the points).—250 yards along Reading line; 200 along Windsor. Both suitable for entrainment of infantry only.

Switches as shown.

Turntables, two T, T, for trucks only, not for engines.

Crossovers, none—but bridge 400 yards eastward carries main road across railway.

Cranes, two, north side.

Horses could be loaded at K (one truck), which could be lengthened—also at D (3 boxes) capable of being lengthened towards the siding, and temporary platform made.

Guns and wagons loaded at H and C, end on—but heavy pull up ramp. Trucks when loaded could be run on to sidings east and west out of the way.

Water—two columns (E, M) for engine supply, connected by pipes with tank L.

Coal—average supply about 50 tons.

Goods shed G, 70′ × 35′, brick, and shed at P available for temporary shelter. Also many buildings in village of Staines suitable for stores, hospitals, &c. Fire buckets useful for watering horses.

Outside.—On south side a good road 20′ wide leads to bridge—with space at Q, 250 yards × 35, useful as a rendezvous for troops or for parking waggons before entraining. On

north side there is ample space in large fields ½ mile from station.

H. G. M.
Capt.——Reg.

Dated

Outside the station, report upon the number and size of entrances, whether approached by steps. If approach to platform not available for horses or carriages, and if the station is in a cutting or embankment, it is only good for entraining infantry. Note what space outside for forming up troops or parking waggons before entraining. Whether station is in an embankment, cutting, or on level.

3. *The Line.*—Give the name of railway (as 'Great Western,' &c.). Whether double or single; gauge* accurately in feet and inches, inside measurement; description of rails and how laid on sleepers, whether longitudinal or transverse.

Bridges, cuttings, embankments, and level crossings. Tunnels, length, how revetted, soil.

Note points on the line where troops can be quickly got out, or stations extemporised—that is where the line is on the level, where rails to form sidings can be laid in, and which are close to a main road.

Telegraph—number of wires, and where connected with.

Distance between stations—Heights commanding the line. Defensive capabilities of stations. Supplies of rails, sleepers, &c. should be noted.

Junctions.—Whether line to required destination goes straight forward, or whether necessary to shunt and go back.

When two lines cross, state whether a train can be shunted from one line to another. If it cannot, whether

* The gauge of railway from Russian frontier as far as Jassy (north of Roumania) is that of Russian railways, 5 feet. The Roumanian, Turkish, and Austrian railways have gauge of 4′ 8½″. The difference being arranged for strategical purposes. But the Russians have arranged their carriages so as to shift wheels to fit new gauge.

facilities exist for making a short junction between them. This may be when one line is on the level and the other on an embankment, merely high enough to pass the engine below the other. Otherwise making a junction rapidly may be considered difficult.

SECTION VII.

RECONNAISSANCE OF VILLAGES.

Some idea of a village may be obtained without going inside. Villages built on hilly, rocky, or marshy ground are usually irregular—the houses are scattered. If there is a stream, the houses usually line it on either side. On even ground the number of main streets and their general direction may be inferred from the roads running into the village.

An open space may be expected near a church or large public building.

Note character of ground all round, especially that bordering roads on outskirts of village. Can the village be commanded by Artillery and whence, and does the ground afford cover?

When time and opportunity permit, examine carefully open spaces inside, nature of enclosures round the houses (whether hedges or walls, high or low). What houses available for depôts, hospitals, or barracks. The *houses*—material, size, whether thatched, tiled or slate or wooden roofs; whether detached or touching. Position and size of church and churchyard. What good points from which to observe surrounding country. *Streets*—whether narrow or tortuous, whether suitable for heavy traffic. Position of post office and telegraph.

Note whether an enemy could reconnoitre village from a distance.

Water—its quality, quantity, and how reached.

Whether village may be passed, by leaving main road and making a detour.

Give the names and addresses of persons who could afford information.

For 'supplies' and 'accommodation' see pages 108–9.

The capabilities of the village for defence would probably be noted in a separate report.

SECTION VIII.

RECONNAISSANCE OF A CAMPING GROUND.

The best site for an encampment or bivouac, when troops are liable to be attacked, is under cover of the position they would occupy for defence and not actually upon it, but near enough for all requirements of speedy occupation.

It is a great advantage to be independent of tents because of the transport they require. If close to the enemy the troops may bivouac, and if distant they may be in cantonments.

But tents may be required in sparsely populated countries; and, as the sanitary principles which apply to camps hold good for bivouacs, *the selection of camping grounds* will now be considered.

For convenience of arrangement, the Report may be divided as follows:

1. *Site*—including (*a*) its sanitary aspect; (*b*) general convenience; (*c*) communications.
2. *Extent* and *Shape*.
3. *Water*, *food*, and *fuel*.
4. Suitability for proper *distribution* of the various arms and the non-combatant departments.

1. *Site* to be healthy—drainage good from nature of soil or gentle slope. Sand, gravel, and chalk the driest. Clay, newly ploughed ground, the site of an old encampment, marshy land, and brushwood (unless on sand or gravel) are bad. In a forest even an open clearing is unhealthy because of decaying leaves.

General convenience.—Slopes not too steep, especially for cavalry. Hurdles, brushwood, branches of trees, heather or straw are useful for giving additional shelter and bedding

(especially for bivouacs). Convenient to have a market town near.

Communications to and from camp, as well as those inside, to be sufficient in number and good. Site not to be obstructed by ravines, marshy, or bad ground—and if these exist, note best points of passage across.

2. *Extent* required depends upon the number and nature of the troops, and whether the camp is to be occupied for a long or a short time. As a rough guide calculate as follows for temporary camping grounds :

War strength.—For one battalion Infantry 130 yards square. For one regiment Cavalry 200 yards front, 150 depth. For one battery of Artillery 130 yards front, 100 depth.

When a brigade or division is to be encamped, calculate for each battalion, regiment, &c. on above data, and allow fully double that total space for the whole encampment, to give room for hospitals, head quarters, commissariat depôts, engineer and ammunition trains, police, &c., and for spaces between corps, and for ground unsuitable for occupation.

The *shape* should allow a convenient arrangement of all arms, as briefly explained below in paragraph 4.

3. *Water.*—Good and abundant—best from running streams fordable here and there with good gravel bottom. Facilities for filling water carts (best to run them into water 2′ or 3′ deep), and for watering horses, either by walking them into water not less than 4″ or 5″ deep, or by constructing wooden troughs (easily made with planks of house floors) or trenches dug in the ground, filled by buckets or portable pumps, or the stream itself may be diverted into them.

A horse or bullock drinks about 1½ gallon at a time, in 3 minutes.

Drinking and cooking water for men should be taken *up stream* ; next, water for horses and cattle ; next, bathing place ; and last, washing place, farthest down the stream.

If water be scarce, find best place for a dam, or where to sink barrels to collect a supply.

Seeking for water.—'Surface springs should be sought for in depressions below the general level, where the earth is moist, or where the grass is unusually green, where gnats hover in swarms, or where the mist rises thickest in the evenings.' Also seek under stones in dry watercourses, or where birds direct their night flights, or where the bushes grow in sandy soil, or, in wild countries, the points where paths of men or animals converge.

Testing water.—'Drinking water should be clear and free from colour, taste, smell, or deposit, on standing.' 'Water from small ponds or shallow wells should be avoided.'

If a stream have a muddy bottom, beware of stirring up the mud when dipping vessels into it.

Amount of water required.—Each man requires for drinking 3 to 4 pints a day. For drinking and cooking ¾ to 1 gallon. For drinking, cooking, washing, &c., at least 4 gallons. For hospital supply, at least 40 gallons. Each horse requires for drinking 6 to 9 gallons.

To calculate amount of water supplied by a running stream.—Multiply together average breadth, depth, and velocity in feet per minute, and multiply product by 900, which gives the number of men for whom there is water supply, approximately.

The sufficiency of supply from wells may be tested roughly thus: Measure depth of water in well; draw off rapidly a given number of gallons, and note the diminution in depth and time taken to recover original depth of water —then compare this time with amount originally drawn off.

For *Food* see page 108.

Fuel should be at hand. Trees (about 1 foot diameter) with brushwood to start the fires. Pine trees and other soft wood are bad, but ash, maple, beech, birch, and other hard woods are good for fires.

4. The practical value of a report upon a camping ground

is at once increased if information be given as to most suitable sites for each arm and for the departmental branches. The following hints may be of use :

Horses should be watered three times a day, therefore they must not be too far from water, nor picketed in the middle of the camp. The ground should be firm and the slopes gentle.

No tents should be pitched in the bottom of a valley, as sudden heavy rains would flood them ; nor upon too low ground, but above the influence of miasma and night mists from rivers and swamps.

When practicable no ravine, stream, or other obstacle should run through the camp of a brigade, certainly not through that of a regiment.

Main communications—whether roads or bridges—should be kept clear of tents.

Hospitals to be located on the healthiest sites, not near cavalry lines ; and, in large camps, in rear of all, and conveniently distributed. It is convenient to place them near roads, on the way to a railway station.

Note the nearest post office, telegraph office, railway station, and market town.

Commissariat Depôts should have roads or good sound ground leading to and from them, in good communication with the whole camp and conveniently posted.

Sites for Brigade and Division *Head Quarters* depend more upon the position of the troops than upon the personal comfort of the staff.

Engineer Park and *Ammunition Train* to be near main roads and towards the rear.

Before making a reconnaissance of a camping ground the following points should be known by the reconnoitrer : The direction of the march into and out of the ground, and the number of men and horses, and the nature of the arms for which the ground is to be selected. Also the direction of the enemy.

The sketch should be on the scale of 4″ to 1 mile.

SECTION IX.

RECONNAISSANCE OF BIVOUAC GROUND.

'*In selecting a site for a bivouac, wood and water are, as for camps, the great requisites; but a good supply of the former is more essential for the bivouac than for the camp, as it is robbed of half its enjoyment unless the men can have fine fires to sleep near. This is all the more essential if the nights are cold. In cold weather, woods are the warmest place for a bivouac. In tropical climates it is pleasanter at night to bivouac in the open. The sanitary principles that apply to the selection of camps, hold good in choosing the site for a bivouac; dry and sheltered positions should be selected,' with straw, heather, or pine branches for bedding, to give the men the best chance of rest. Fires are most important in warm weather also, at night, if there is mist or dew in early morning.

SECTION X.

RECONNAISSANCE OF MOUNTAINS.

For military purposes a knowledge of the roads, passes, and tracks over the mountains is what is principally required.

If the lines of 'water partings' (or 'watersheds') of chains and spurs, and the watercourses of valleys and ravines are shown on the sketch, a very fair general idea of the whole mountain range may be gathered.

The sketch should show the relative heights of the principal hills, and their communications and points of connection.

Usually *roads* follow the lines of valleys. If two valleys run nearly parallel, a passable track may be found along the water parting of the hill between them.

Note particularly the worst and steepest points of the

* Wolseley's 'Soldier's Pocket Book.'

roads, and the parts most liable to be flooded by mountain torrents—and whether practicable for carriages, beasts of burden, or infantry only. Whether bad parts may be repaired, or altogether new routes followed to avoid steep inclines (up or down) or dangerous defiles.

Mountain *streams* are liable to sudden floodings—indicated by large round boulders lying in their bed. Ascertain from inhabitants to what extent these floods rise. The steeper the mountain slopes, the quicker the streams will rise. Fords across these streams are seldom good for horses.

Ravines may be dry one day and overflowed by a torrent the next; but when dry they may serve as roads, therefore ascertain where they lead to and where they join the main track.

Passes to be carefully reported on, especially if no other good road exists. The best pass is not always the least elevated; the latter are frequently marshy.

Remember that often it is easier to go round a hill, following a contour as it were, than to go straight over it.

Slopes may be termed 'gentle' up to 5°, 'steep' over 20°, and 'very steep' over 30°.

On very high mountains many passes are impracticable for months together, from snow drifts. Ascertain particulars about this.

It is useful to note what points give the best views of surrounding country.

SECTION XI.

RECONNAISSANCE OF A SMALL POST.

An officer charged with the defence of a small post, or with the selection of one, is required to send in a report and sketch explaining all that should be told.

The sketch should be on a scale of 4″ or 6″ to a mile. It should show the *direction* of the enemy, and of the picquets on either flank, and of the support; also *direction* of remarkable objects in front (as a church, village, hill top, &c.) as useful guides hereafter.

Usually a report separate from sketch must be rendered, not only describing the positions of sentries, detached parties, routes of patrols, &c., which may be shown on the face of sketch, but giving reasons briefly for all that has been done, and which would not at first be apparent to any one unacquainted with the ground. The reshould also be a general explanatory description of the whole ground.

This report to be written on half margin foolscap (when practicable) in the form of a memorandum, with names, rank, and regiment of writer and person to whom addressed; date, hour, and place from whence despatched, written at the top.

The report may be divided somewhat as follows, modified according to circumstances:

1. *General description* of ground—level, hilly, or undulating. The ravines, valleys, and hollows; the hills, spurs, underfeatures, and cliffs.

2. Facilities for *cover*. Woods, fences, walls, embankments, and natural dips.

3. *Water*—as an obstacle. Rivers, streams, large ponds, marshes, and how they may be crossed by defenders or assailants.

4. *Roads*, and all means of communication—even small paths and tracks leading to the front, rear, and laterally—those leading from the front through woods and hidden ground to be most carefully noted.

5. *Buildings* to be described in detail if intended to be rendered defensible and held.

6. *Commanding ground*, in front, rear, and flank.

7. *Disposition of sentries*, detached and examining parties, and routes of patrols, with reasons tersely given. Also how connection with other picquets and support is maintained, and how the main body of your own picquet is posted.

8. *Weak points*, which require careful watching, such as a wood or hollow in front, or a deep winding valley.

9. *Line of retreat*, if forced back in one direction or another, and how the retreat would be conducted.

10. *Second position* to which the picquet would fall back if necessary, and make another stand.

11. *Final retreat* upon the support.

By giving these particulars the relieving officer will know much that is useful even before he reaches the ground.

SECTION XII.

RECONNAISSANCE OF A POSITION.

Properly to reconnoitre a great 'Position' with a view to *selecting* it for defence, requires a wide knowledge of tactics, and the duty would probably devolve upon officers of superior rank.

But a commander may have selected a locality generally as likely to afford a good defensive position; his knowledge from maps may enable him to do this without having examined the ground personally. Details, however, may be required which his maps do not show, in which case reconnoitrers would be sent forward to gain this information. They would make a detailed sketch of the whole ground (scale 2″ or 4″ to 1 mile), or a trace or enlarged copy taken from some existing map would give general features, afterwards to be filled in, and a report sent in explaining all matters of tactical importance. This, however, is a subject which goes beyond the limits of this manual.

The possibility of many tactical formations depends much upon the slopes of the ground. A slope of 10° has a considerable effect on the movements of infantry in close formation. On a slope of 20° the movements of cavalry and artillery cannot be carried out in an orderly manner, except as single horsemen. A slope of 30° may be considered as impassable for infantry in close formation.

SECTION XIII.

ARRANGEMENTS FOR A CONCERTED RECONNAISSANCE OF A DISTRICT.

It may be necessary on service to have a tract of country —say 10 to 12 square miles—quickly reconnoitred.

The number and skill of the reconnoitrers requisite will depend mainly upon the nature of the country, the *amount* of details needed, the time allowed, and the nature of the maps available.

Before starting, all available maps should be carefully studied—it will save time in the long run to do so—and each officer should have some specific work allotted to him.

The following example may serve as a general guide how to set about such a task, without going into details which do not come within the scope of this treatise.

See Plate XV.

Example.—A rapid reconnaissance is to be made of the country between Croydon, Sutton, Banstead, and eastward to Red Lion (London and Brighton Railway), with a view to reporting the facilities afforded for moving troops over all parts of this district, and bivouacking them thereon. The enemy is towards the north; line of retreat southward. Reconnoitrers to start from Banstead.

Three reconnoitrers might examine this ground by following the routes as below:

[The dotted lines, lettered, indicate the several routes, with arrow heads to show the direction to and fro.]

1. Route A, A, going out by high ground, in order to have a better view of the whole country, and returning by the railway and valley.

2. Route B, B, examining cross roads to south on the way out, and those to the north on return journey. A shorter distance than A, A, because ground more cramped.

3. Route C, C, examining railway, means of crossing it, stations, &c.

SECTION XIV.

COAST RECONNAISSANCE.

A coast line may have to be reconnoitred with one of two objects, (*a*) with a view to defending it against a hostile landing; (*b*) with a view to effecting a landing. In both cases pretty much the same sort of work will have to be

done, as the pros and cons must be ascertained on both sides.

The report may be arranged somewhat as follows :

1. *The offing.*
2. *Topographical description* of beach and foreshore.
3. *Country* inland within cannon shot.
4. *Communications.*

1. From charts, 'sailing directions,'* or local pilots or experienced fishermen, ascertain depth of water, to show whether large ships may approach the shore, to cover a debarkation with their fire. Describe position of sandbanks and dangerous rocks. State rise of tide ; prevailing winds ; anchorages ; whether the bottom is 'foul' with rocks, or of sound good holding clay.

2. Width of beach at high and low water ; whether sand (hard or soft), shingle, mud, or rock ; whether bordered by cliffs, sandhills, &c., and points affording passage from beach inland. Whether beach, and country immediately behind, is under fire from the ships. Whether hills or headlands afford suitable positions for the defenders.

3. Nature of country inland ; whether level, hilly, open, woody, &c. Whether liable to artificial or natural inundations. Nature of soil. Whether intersected by hedges, deep drains, swamps, &c. What position is favourable for defence against the invader, and what points the enemy might occupy with a small force,† to cover and hold the landing place during the operation of disembarking his troops.

4. Note carefully how men, horses, and carriages can be brought from beach inland, marking the best routes or tracks leading to main roads, describing their suitability for heavy traffic.

* Books are published by the Admiralty giving minute information on all these matters, and may be purchased by any person.

† These detahcments would probably be landed somewhere near, and would then push quickly forward to seize a favourable covering position.

Even small harbours may prove invaluable for landing heavy guns and stores. Describe in detail size [and] depth; also length and height of wharves, jetties, &c.

SECTION XV.

NOTES ON ESTIMATION OF SUPPLIES.

To find the number of tons in a stack, multiply together the height, breadth, and length in yards, and divide by 12 (for hay), by 17 (for straw).

'Height' is distance from ground to eaves + ⅓ distance from eaves to apex (*see* Plate X., *fig.* 3).

i.e. $\frac{(AC + \frac{1}{3} DE) \times AF \times AB}{12}$ = No. tons hay.

A cubic yard of hay weighs 200 lbs. nearly.
,, ,, straw ,, 140 ,, ,,
,, ,, grain equal 20 bushels.
An acre of grass will yield from 1 to 3 tons of hay.
,, ,, oats ,, ,, 50 to 60 bushels.
,, ,, wheat ,, ,, 30 to 40 ,,
,, ,, barley ,, ,, 40 to 50 ,,
20 lbs. of unthreshed corn form a ration.
28 lbs. green forage = 10 lbs. hay.
1 load of hay = 36 trusses, of 56 lbs. each.
1 truss of straw weighs 36 lbs.
1 bushel of oats weighs from 36 to 41 lbs.
14 lbs. of bran = 9 lbs. of oats.
An average-sized ox supplies 300 rations.
,, ,, sheep ,, 45 ,,
,, ,, pig ,, 110 ,,
A load for a horse or mule may be estimated at 200 lbs.
,, ,, 2-horse wagon ,, ,, 800 ,,
,, ,, 4 ,, ,, ,, ,, 1,800 ,,
,, ,, 6 ,, ,, (general service new pattern) may be estimated at 3,300 lbs.

ACCOMMODATION.

An approximate calculation for temporary accommodation on the line of march may be made on one or other of the following data:

1. Allow 25 soldiers to each small house, or 100 to 200 to each large house.
2. For large buildings take ¼ number of square yards in the ground floor, for number of men per story.
3. Multiply the number of flues by 6 for number of men.
4. In a room 15′ wide allow 1 man per yard of length. In a room 15′ to 20′ wide allow 2 men per yard of length. In a room more than 25′ wide allow 3 men per yard of length.

SHELTER FOR HORSES.

In outhouses, sheds, barns, &c., if 15′ wide, allow 1 horse to every two yards of length. If 24′ wide, allow 2 horses to every two yards of length.

SECTION XVI.

COURSE OF FIELD SKETCHING AND RECONNAISSANCE OF GROUND FOR NON-COMMISSIONED OFFICERS OF INFANTRY, CAVALRY, AND ARTILLERY.

The whole teaching must be based on the principle that the men are not to be trained as makers of maps, but as intelligent soldiers, who will be required, either to work alone, or to assist Officers in investigating as quickly as possible and reporting clearly the military capabilities of a piece of country, whether maps of it are already in existence or not.

The means used ought to be such as are likely to be available on a campaign; the Prismatic Compass, therefore, though a valuable instrument, the use of which should be

known, must be considered as generally beyond the reach of the Non-commissioned Officers.

On the other hand, a Pocket Compass appears almost necessary for all Cavalry Officers and Non-commissioned Officers, as they may often have to ride by it; and it will be found quite sufficient for ordinary purposes of sketching roads or features of ground.

No class should consist of more than eight men, or ten at the very outside, and not more than four should be taken from each regiment, when the course is not carried out regimentally.

The materials required will be:

Some sheets of Drawing Paper (Whatman's pressed is the best, but white cartridge paper will do) cut into pieces of half foolscap size. Colours: Burnt Sienna, Crimson Lake, Prussian Blue, and Gamboge. Steel Pens (not etching pens, they are too fine). A few sheets of Bristol Board, or Card Board, cut into narrow slips, for scales and rulers. Camels' hair brushes with fine points (one for every two men will suffice).

For each man:

A common Magnetic Compass,* the needle of which can be clamped and unclamped at will.

A piece of stout Millboard, about 9 in. by 6 in. (the backs of old books would do), with two common indiarubber bands for each, and an extra band in the pocket lest one should break.

A good H Pencil and a small piece of Indiarubber (not ink-eraser).

A red and blue Pencil.

This is all that is absolutely necessary, but a Book for road traversing and a Boxwood Protractor should also be lent; so that the Non-commissioned Officers should learn the best way of traversing and plotting.†

The Instructor must have in his possession sufficient

* It should have a cover to preserve the glass, and a ring attached.

† *See* page 2.

prismatic compasses to teach the use of them, as the work done by their means would perhaps be more accurate;* but the Non-commissioned Officers should be taught that they must on no account regard the prismatic compass as a *necessary* for field sketching. Much of the most useful work is performed in war without the use of any instrument.

The course will be four weeks of five working days each;—twenty days.

During the last week of the course there will be an examination conducted by the Instructor; who, from the results of it and his own knowledge, will divide the Non-commissioned Officers into two classes:

1st. Those who have shown such ability in field sketching, as well as in reconnaissance, that they might usefully be given further instruction, and become, in their turn, able to instruct.

2d. Those who are capable reconnoitrers, but can only be rough draftsmen.†

Those who have neither hands for drawing nor wits for reconnaissance should be specially reported on as incompetent, and sent back to their regiments.

During the course, the Non-commissioned Officers should be taken off all stable duties except evening stables, and all guards and parades except on Saturdays and Sundays, but they may still attend to the interior economy of their troops or companies. Regimental Officers should attend the classes as often as possible.

The following course should be carried out as nearly as possible in the order given, regard being had to weather. About four hours' work each day should be exacted.

* The men should compare a sketch done by means of a prismatic compass with one done by ordinary compass, to show them how correctly the latter may be drawn.

† This class of men may, to a certain extent, make up for their shortcomings as draftsmen by their greater power of observation and description.

FIRST DAY.

Definitions.

Begin with a lecture describing the importance of reconnaissance in war, and how, by a proper division of labour, each man's work would form an important item of the reconnaissance. Then take the class out of doors, and instruct them thoroughly in the meaning of common military terms, with the details appertaining to them; such as—

Ground: Its various features.*

Water: Ditto.†

Roads: Different kinds and conditions.‡

Railways: Tunnels, viaducts, cuttings, embankments, sidings, &c.

Woods: Their details.§

Inhabited Places: Towns, villages, farms, &c.; walls, hedges, gardens, &c.; defensible houses, &c.

Special Features: Country houses, towers, tall chimneys, steeples, mills, lone trees, &c.

Each Non-commissioned Officer should carry with him a plate of conventional signs, and compare them with the actual features represented.

The Instructor must explain the likeness in each case.

N.B. Throughout the course, questions on this first lesson should be frequently asked.

* Open or close, undulating or level country, heights, valleys, ravines, cultivation, &c. (*see* page 28).

† Streams, rivers, nature of right or left bank, canals, streams for irrigation, current, banks; flashes, marshes, river sources, springs; bridges, fords, and water-mills (*see* page 85).

‡ Main roads, country roads, bridle paths, nature of route (whether metalled, how, and in what condition), tunnels; viaducts (their dimensions), gradients, boundaries, telegraphs (posts, stations, &c.) (*see* also page 76).

§ Forests, woods, groves, brushwood, or underwood, glades, rows of trees, &c. (*see* page 92).

SECOND DAY.

Reading Maps.

Give a short lecture explaining the common errors made in depicting features of country.* Then take an ordinary map with military features not marked on it (a rough one might be prepared), and show how little of the necessary information it contains. Then show a six-inch map, with military features, and point out instances of the conventional signs which are by this time somewhat familiar. Question the Non-commissioned Officers on them. Then, placing the map before them, let each in turn suppose himself to start on the map from a point on a road or the open country, in a given direction, and tell what is passed over and what is on either side of the march.

Explain the chief points of the compass as seen on the map; but do not yet show the compass itself.

Question thoroughly till the class have fairly mastered the features of country, as shown on a map.

As a change during this lesson, they may pace distances for an half an hour.†

THIRD AND FOURTH DAYS.

During these two days the Non-commissioned Officers should, at some convenient time, be taken out, if they are of cavalry or field artillery on horseback, if of infantry on foot; when each mounted Non-commissioned Officer should ascertain the pace of his horse at the walk and trot over a measured

* Common errors:—bridges, cuttings, embankments, trees, and houses too large; roads too wide; bends in roads exaggerated.

† As a rule, on level, even ground, infantry soldiers pace distances with fair regularity, if allowed to take the ordinary 'pace' of 30". But it will be necessary to give frequent practice up and down hill, and over rough ground, and along winding roads.

distance of not less than 200 yards;* after this the riders or men on foot should be sent at intervals over a distance of half a mile or so, reporting the distance as they estimate it on their return. The Instructor will of course know this distance accurately. Care must be taken that the Non-commissioned Officers do not compare their estimates. All distances to be estimated in yards.

During this practice those who are not actually pacing the distance may be questioned on features of ground within sight.

On these days the indoor work will be as follows:

Give out the plates of conventional signs to be copied, whenever there is spare time, with a hard black-lead pencil.

No attempt should be made at this stage to imitate the fineness of engraving, but there must be no possibility of mistake in the meaning of the work.

No printing must be attempted, but only clear small writing.

Also give the Non-commissioned Officers practice thus: Let each man have a piece of paper, marked in squares the sides of which represent known distances; the paper should also have two pencil lines on it representing a road. Write on the black board: 'At 100 yards road passes, by a brick bridge, over a stream which runs east to west, and is 20 yards wide. At 180 yards, cross lanes to ——— on east and ——— on west;' and so on, describing various features, which the men should mark at once on the paper, using black, red, and blue pencils.†

* If your horse takes, say 106 *steps* in going over 100 yards at a walk, you can turn any number of steps into the corresponding number of yards, by deducting 6 from every 100 steps taken. For example: 400 steps = $(400-4\times6)$ yards = 376 yards (nearly). And similarly for any other number of steps of the same horse. When pacing on horseback, count every other step, *i.e.* every time the off foot comes to the ground, and double the total.

† The common error in this practice is to draw everything too large, but it is well to accustom the men as soon as possible to draw on a small scale.

FIFTH DAY.

Explain the methods of copying, enlarging, and reducing maps, and give a piece of skeleton map, without hills, to be enlarged. Each man should start with a marked square, and add as many others grouped round it as he can do in the time. The map should represent a piece of country near at hand, and is to be enlarged to a scale of two inches to the mile.

SIXTH DAY.

Assemble in the class-room, and let each man provide himself with a rough scale, two inches to the mile, thus: On the edge of a piece of cardboard mark divisions of ¼ of an inch each. These will represent 220 yards. Divide the quarter inches into two parts. These subdivisions will then represent 110 yards each, a sufficient measure for rough purposes. The use of this, made in five minutes, will give the men ideas on the subject of scales. Go out on foot, carrying the skeleton maps prepared on the preceding day, and let the Non-commissioned Officers put in the features along the road by pacing, and guessing distances by the eye, always using the cardboard scale. By this time the Non-commissioned Officers will have discovered that they do not know exactly what features should be put in and reported. Tell them to write on the sketch whatever they think ought to be reported. They will encounter some difficulty, and be prepared for the lesson of the

SEVENTH DAY.

Give a lecture on what is to be reported, and typical example of a good road sketch and report. Let the Non-commissioned Officers make fair copies of their sketches produced the day before, using black, red, and blue pencils.

Prepare another skeleton map for the next day, but of new ground.

EIGHTH DAY.

Precisely the same work as on the Sixth Day. The knowledge gained up to this time ought to ensure the production of a fairly good report. Cavalry Non-commissioned Officers should now be working on horseback.*

NINTH DAY.

Fair sketches and reports to be made from the work of the Eighth Day.

Give a lecture on slopes and practical methods of estimating them,† and on the representation of hills. Give

* Let the original drawing, done on horseback, be as neat and distinct as possible. Do not rest the sketching board upon the saddle or folded cloak, but hold it in your hand, or sling it from your neck. Use coloured pencils freely, and, when not in use, slip the pencil between the buttons of your jacket, or under the cloak strap. Use indiarubber, not the finger, to correct a mistake.

† The steepness of natural slopes of ground is much less than is usually imagined. Show the men examples on the ground of slopes of 2°, 5°, 12°, and 20°. When a hill sketch does not show clearly which is the bottom and which the top of a hill, draw a small arrow head, always pointing *down* hill.

Ground which rises 1 foot or 1 yard (measured vertically) in every 12 feet, or 12 yards (measured horizontally), is said to have a slope of '1 in 12,' or may be expressed thus '$\frac{1}{12}$'. This degree of steepness may be also expressed as '5 degrees,' or 5°, and similarly for other slopes.

Gradients may be found roughly as follows (Plate X., *fig.* 5):

Let AB represent a man on horseback. BC the slope of the ground. C a point level with the man's eye (supposed to be 8' above his horse's feet). The steepness of the slope may be found by measuring the distance BC.

If BC = 32 yards, slope is 5 degrees, or $\frac{1}{12}$.
" = 21 " " " 7 " " $\frac{1}{8}$.
" = 16 " " " 10 " " $\frac{1}{6}$.
" = 10½ " " " 15 " " $\frac{1}{4}$.
" = 8 " " " 20 " " $\frac{1}{3}$.

If the observer be *on foot*, and his eye 5½ feet above the ground—

practice in the same, both in and out of doors. No time must be wasted in attempts at pretty drawing.*

TENTH DAY.

The same as during the latter part of the Ninth Day till some facility is acquired. Lend examples of hill shading to such as wish to practise out of hours, but no such example must be taken out of the class-room.

A fortnight will have elapsed between this and the first lesson, and already such of the Non-commissioned Officers as have fair capacity will have learnt enough to make a useful reconnaissance in any country, ordinary maps of which exist.

The second fortnight will be spent in sketching without maps, and in confirming the knowledge previously acquired.

The lessons given during the past fortnight have been progressive, nothing being taught till the men have seen the want of it.

The same principle should be adopted for the rest of the course, which, however, cannot be laid down in detail, as so much must depend on the weather. No man can be expected to work well with compasses, &c., in cold and wet weather.

If BC = 22 yards, slope is 5 degrees, or $\frac{1}{11}$.
" = 15 " " " 7 " " $\frac{1}{8}$.
" = 11 " " " 10 " " $\frac{1}{6}$.
" = $7\frac{1}{2}$ " " " 15 " " $\frac{1}{4}$.
" = $5\frac{1}{2}$ " " " 20 " " $\frac{1}{3}$.

To find a point level with the eye when the observer is mounted.

Measure on a wall a height, AB (Plate X., *fig.* 4), equal to height of observer's eye. Let observer draw his sword, and hold it upright in such a position that the *point* is level with line CA; let him remember the exact position of his hand resting on his thigh. The method of applying this to practice in the field is obvious.

By this means any man may ascertain and report the most important gradients on roads or hill sides.

* What is required is a clear drawing, sufficiently correct.

Non-commissioned Officers of cavalry should frequently make sketches on horseback.*

Third Week.

ELEVENTH DAY.

Supply each man with a pocket compass (which need not cost more than two or three shillings), a pencil and a piece of indiarubber, his scale, and the millboard and bands described above, and intended to act roughly as a sketching case; even the cover of a book would do. There should be one sketching case for each class, and the Non-commissioned Officers should be taught to imitate it with rough materials, such as twine instead of straps, &c. Explain the use of the compass, and Magnetic North and South.† Take the class out to sketch a road in the rough-and-ready way suitable for war, as follows: Place the paper (fastened by elastic rings to the millboard) horizontally, with its longest sides parallel to the direction of the road. Draw a line to represent the direction of the road, and lay the compass on the paper near one of the top corners, as is most convenient. Mark on the paper, without altering its position, points opposite the two ends of the needle, and draw a line to represent the Magnetic North and South. Then pace along the road, putting in the features as you go until you come to the first bend. There, place the compass again on the paper, adjusting the paper until magnetic North and South line, as previously marked upon it, correspond in direction with the ends of the needle. Draw by eye a line in the new direction of the road, and proceed as before.

* Although some experienced practical men say that the reconnoitrer should dismount when he has to make a sketch, yet in many cases a very fair sketch may be made on horseback—and men should learn, if possible, how to do this.

† Sketches sent in by Non-commissioned Officers need only show the Magnetic North, and not the True North (*see* page 4).

TWELFTH, THIRTEENTH, FOURTEENTH, AND FIFTEENTH DAYS.

Give constant practice in sketching with common compass on a scale of two inches to a mile, and in making reports of roads, rivers, &c. The Instructor must invariably be present, and teach the men to save time by working in pairs. He should point out good positions for troops and all things that ought to be reported on. Hills must only be represented (as they would be in war) by vertical hachures rapidly done, but their height should be calculated and marked.* During this week the principles of contouring may be taught; but no time should be lost in contouring accurately, as the object is not to make maps but practical sketches: calculations of heights and distances by simple methods must be taught.

Fourth Week.

Teach the use of the prismatic compass and protractor to all who show aptitude, and continue sketching ground and making reports. The best pupils may be taught the use of check angles and interpellation. Sufficient horizontal hachuring may be practised indoors to detect any talent for it; but the principle must be acted upon that these Non-commissioned Officers are not to be trained as map makers, but as practical reconnoitrers of ground. Part of this week must be employed in testing the acquirements of the Non-commissioned Officers.

N.B.—During the whole of the course, frequently remind the men that the work they are about may often have to be done in the neighbourhood of the enemy, and that in all their thoughts the idea of an existing enemy must have place.†

* *See* pages 67–68.

† To carry out this idea, the Instructor should mention in what direction the enemy is supposed to be, especially when road sketching is practised—the men being taught how to approach a hill or other cover in order to reconnoitre it, if an enemy were near. This part of the instruction gives great scope for useful work.

Though a course occupying a month has been laid down for guidance, the Instructor will probably be able to judge at the end of the second week whether all the Non-commissioned Officers will receive benefit from further teaching. If, in any case, it appears that no benefit would accrue to the Service from instruction during the third and fourth weeks, the Non-commissioned Officer should be sent back to regimental duty.

On the other hand, such Non-commissioned Officers as show exceptional ability should be encouraged to carry the subject further and qualify themselves to become Instructors in their regiments.* Examination in their power of instructing should form one of the tests used during the last week.

During the latter part of the course cavalry Non-commissioned Officers and mounted Non-commissioned Officers of artillery should practise reconnoitring over a wider extent of ground than is possible for infantry in the same time, and cavalry and infantry together should, at least once, be worked together; the cavalry taking the distant portions of the ground to be reconnoitred, the infantry that close to the march. It must, however, be understood that the length of the course is only sufficient to allow of the acquisition of elementary knowledge. The application of such knowledge must be practised assiduously afterwards with special reference to the capabilities and uses of the arm, whether infantry, cavalry, or artillery.

The following typical examples for practising Non-commissioned Officers in reconnaissance may be found useful. Some of these may be carried out at almost every station, and they will serve to show the men the practical utility of the foregoing course:

1. Find out how many men and horses might be billeted in the hamlet of ——— (*see* page 109) in time of war—

* These men might be instructed in 'Eye Sketching' without instruments. Paper ruled into small squares should be used (*see* note †, page 75). The bends of the roads, &c., and distances are put in by eye aided by the small squares (*see* also pages 59–62).

showing by sketch where each man and horse would be lodged, with sufficient clearness to guide the officer in charge of a detachment to tell off the men to their billets immediately on arrival.

2. Examine the country between A, B, and C, and ascertain how a patrol of 4 men might move from D to E, and thence to F without being seen from G.

Select the shortest practicable route that fulfils these conditions and mark it on the sketch, or describe it in writing.

3. What point, not more than ¼ of a mile from the road between A and B, gives the best view of the country towards the north-west.

4. Mark on a map the line, always in sight of some part of the road AB, from which the best view may be had of the country towards the west. (A useful thing for 'flanking party' to know when enemy is towards the west.)

5. In charge of a 'detached party' on outpost duty watching the ground between A, B, C, D, send in sketch or written report of this portion of ground (*see* page 103).

6. A mounted orderly is sent from A with a letter to be delivered at B as soon as possible. Mark best route to follow; the bridge at C is supposed to be destroyed, the hill (wood, village, &c.) at D being in the enemy's hands. You are provided with a map, scale 1″ to 1 mile.

7. Describe the road between A and B so far as you can examine it without leaving the ground included between C, D, E, and F.

8. Starting from B you are ordered to reconnoitre the valley east of ridge A, unseen by the enemy, whose vedettes are at C, D, E, and F. Mark on sketch the route you would follow.

9. Four squadrons of cavalry are to be watered in village of ——— in the shortest time practicable. Examine the village and report how the process of watering can best be carried out—describing where water is to be found, whether in ponds, wells, &c., and what number of horses should go to each place, and by what route—to and from.

LONDON : PRINTED BY
SPOTTISWOODE AND CO., NEW-STREET SQUARE
AND PARLIAMENT STREET

Fig. 2.

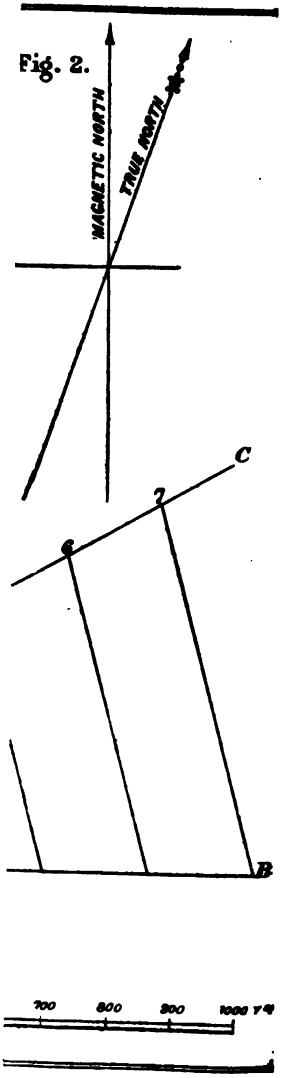

ig. 7.

3.



CONVENTIONAL



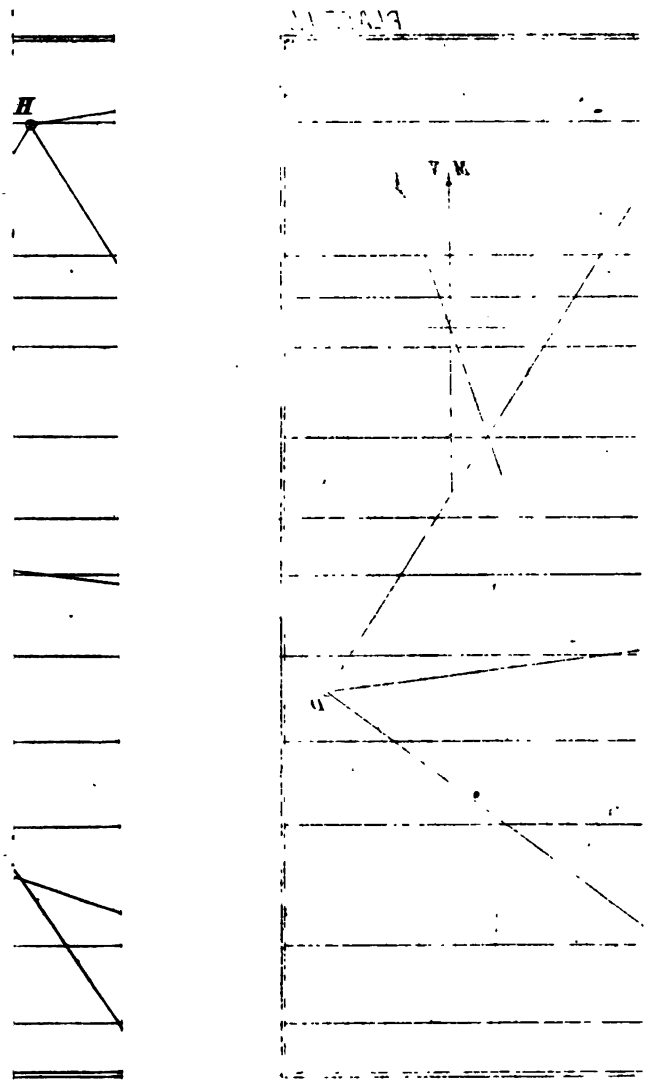
H
M

PLATE VI.

17.



18.



Fig. 19.

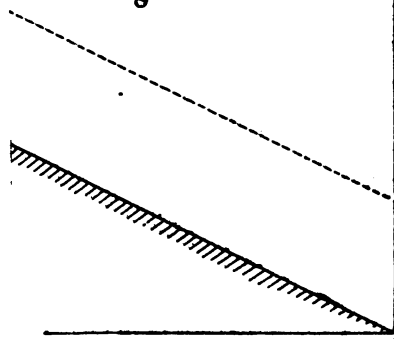

Fig. 20.



2
ale horizo
vertic
B
A

A
B

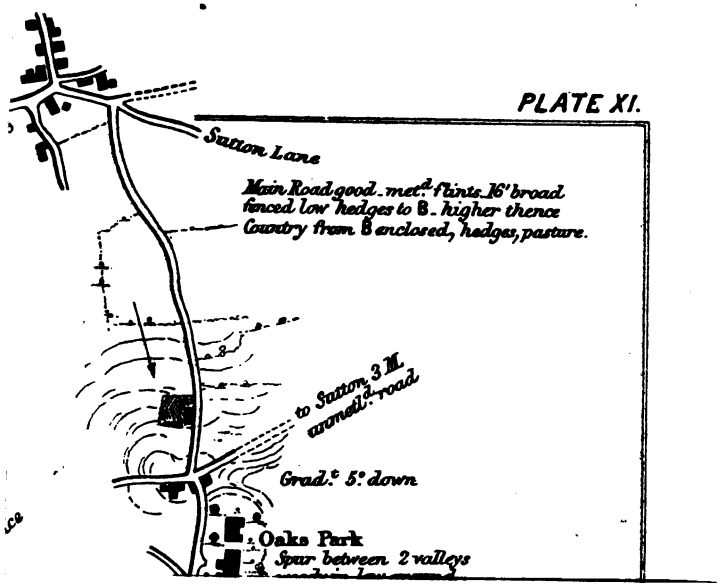
PLATE XI.
Sutton Lane
Main Road good - metd. flints 16' broad
fenced low hedges to B. higher thence
Country from B enclosed, hedges, pasture.
to Sutton 3 M.
unmetd. road
Gradt. 5° down
Oaks Park
Spur between 2 valleys

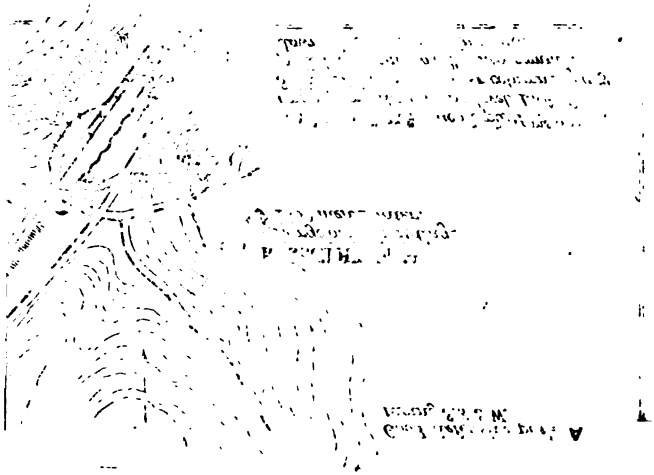

PLATE XII.

Road Sketch
FROM
TERHAM JUNCTION
TO
RANSTEAD.
Name
Rank & Reg.t
Date
Sutton 3. m.
Oaks Park
to Carshalton
Little Woodcote
to Beddington 2 m.
Great Woodcote
Russell Hill
CATERHAM JUNCTION
to Croydon 8 m.
to London

PLATE XIII.

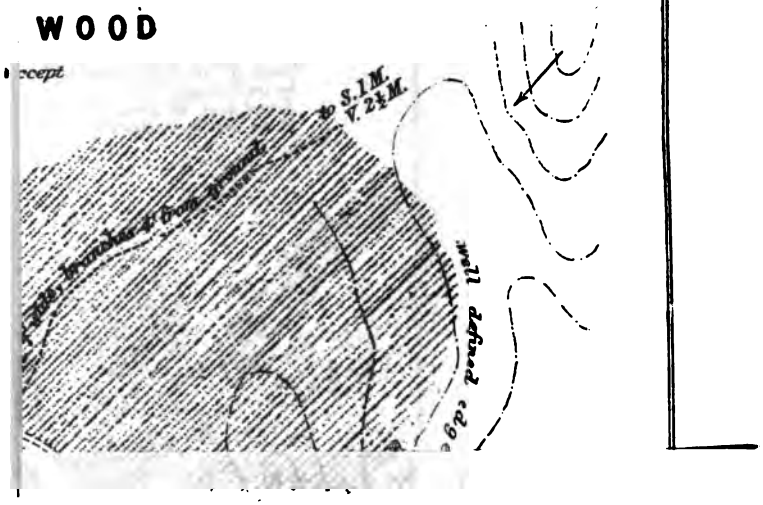

C
D
F
F
to Staines
rden
IC HOUSE.

LONDON : PRINTED BY
SPOTTISWOODE AND CO., NEW-STREET SQUARE
AND PARLIAMENT STREET

Fig. 2.

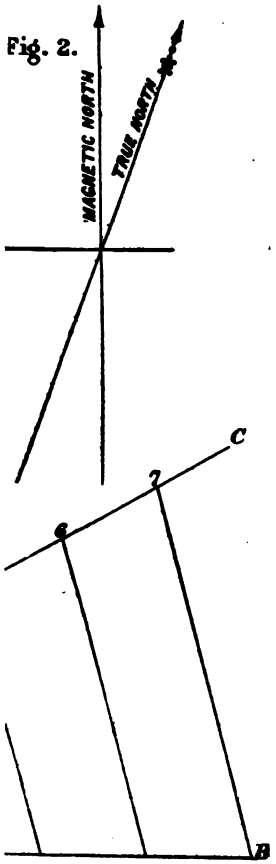

A SELECTION FROM THE LIST OF

MILITARY WORKS

PUBLISHED BY

C. KEGAN PAUL & CO.

1 Paternoster Square.

HASTY INTRENCHMENTS. By Colonel A. BRIALMONT. Translated by Lieutenant Charles A. Empson, R.A. With Nine Plates. Demy 8vo. price 6*s*.

THE OPERATIONS OF THE GERMAN ARMIES IN FRANCE, from Sedan to the end of the War of 1870–71. With Map. From the Journals of the Head-Quarters Staff. By Major W. BLUMB. Translated by the late E. M. Jones, Major 20th Foot, Prof. of Mil. Hist., Sandhurst. Demy 8vo. price 9*s*.

TACTICAL DEDUCTIONS FROM THE WAR OF 1870–1. By Captain A. von BOGUSLAWSKI. Translated by Colonel Sir Lumley Graham, Bart., late 18th (Royal Irish) Regiment. Third Edition, Revised and Corrected. Demy 8vo. price 7*s*.

MINOR TACTICS. By Captain C. CLERY. With 26 Maps and Plans. Third and revised Edition. Demy 8vo. cloth, price 16*s*.

STUDIES IN LEADING TROOPS. By Colonel von VERDY DU VERNOIS. An authorised and accurate Translation by Lieutenant H. J. T. Hildyard, 71st Foot. Parts I. and II. Demy 8vo. price 7*s*.

C. KEGAN PAUL & CO., 1 Paternoster Square, London.

THE OFFICER'S MEMORANDUM BOOK FOR PEACE AND WAR. By Lieutenant-Colonel R. Harrison. Second Edition. Oblong 32mo. roan, elastic band and pencil, price 3*s.* 6*d.*; russia, price 5*s.*

TACTICAL EXAMPLES. By Captain H. Helvig. Vol. I. The Battalion. Price 15*s.* Vol. II. The Regiment and Brigade. Price 10*s.* 6*d.* Translated from the German by Colonel Sir Lumley Graham. With numerous Diagrams. Demy 8vo. cloth.

NOTES ON CAVALRY TACTICS, ORGANISATION, &c. By a Cavalry Officer. With Diagrams. Demy 8vo. cloth, price 12*s.*

RUSSIAN WARS WITH TURKEY, PAST AND PRESENT. By Major Frank S. Russell. With Two Maps. Second Edition. Crown 8vo. cloth, price 6*s.*

THE DUTIES OF THE GENERAL STAFF. By Major-General B. von Schellendorf. Translated from the German by Lieutenant Hare. Vol. I. Demy 8vo. cloth, price 10*s.* 6*d.*

STUDIES IN THE NEW INFANTRY TACTICS. By Major W. von Scherff. Parts I. and II. Translated from the German by Colonel Lumley Graham. Demy 8vo. price 7*s.* 6*d.*

THE REGIMENT OF BENGAL ARTILLERY. By Lieutenant-Colonel F. W. Stubbs. The History of its Organisation, Equipment, and War Services. Compiled from Published Works, Official Records, and various Private Sources. With numerous Maps and Illustrations. 2 vols. demy 8vo. price 32*s.*

ELEMENTARY MILITARY GEOGRAPHY, RECONNOITRING, AND SKETCHING. By Captain C. E. H. Vincent. Compiled for Non-commissioned Officers and Soldiers of All Arms. Square crown 8vo. price 2*s.* 6*d.*

C. KEGAN PAUL & CO., 1 Paternoster Square, London.

A LIST OF

C. KEGAN PAUL AND CO.'S

PUBLICATIONS.

A LIST OF
C. KEGAN PAUL AND CO.'S
PUBLICATIONS.

ABBEY (Henry).
Ballads of Good Deeds, and Other Verses. Fcap. 8vo. Cloth gilt, price 5*s.*

ABDULLA (Hakayit).
Autobiography of a Malay Munshi. Translated by J. T. Thomson, F. R. G. S. With Photo-lithograph Page of Abdulla's MS. Post 8vo. Cloth, price 12*s.*

ADAMS (A. L.), M.A., M.B., F.R.S., F.G.S.
Field and Forest Rambles of a Naturalist in New Brunswick. With Notes and Observations on the Natural History of Eastern Canada. Illustrated. 8vo. Cloth, price 14*s.*

ADAMS (F. O.), F.R.G.S.
The History of Japan. From the Earliest Period to the Present Time. New Edition, revised. 2 volumes. With Maps and Plans. Demy 8vo. Cloth, price 21*s.* each.

ADAMS (W. D.).
Lyrics of Love, from Shakespeare to Tennyson. Selected and arranged by. Fcap. 8vo. Cloth extra, gilt edges, price 3*s.* 6*d.*
Also, a Cheap Edition. Fcap. 8vo. Cloth, price 2*s.* 6*d.*

ADAMS (John), M.A.
St. Malo's Quest, and other Poems. Fcap. 8vo. Cloth, 5*s.*

ADON.
Through Storm & Sunshine. Illustrated by M. E. Edwards, A. T. H. Paterson, and the Author. Crown 8vo. Cloth, price 7*s.* 6*d.*

A. J. R.
Told at Twilight; Stories in Verse, Songs, &c. Fcap. 8vo. Cloth, price 3*s.* 6*d.*

A. K. H. B.
A Scotch Communion Sunday, to which are added Certain Discourses from a University City. By the Author of "The Recreations of a Country Parson." Second Edition. Crown 8vo. Cloth, price 5*s.*

ALBERT (Mary).
Holland and her Heroes to the year 1585. An Adaptation from "Motley's Rise of the Dutch Republic. Small crown 8vo. Cloth, price, 4*s.* 6*d.*

ALLEN (Rev. R.), M.A.
Abraham; his Life, Times, and Travels, 3,800 years ago. Second Edition. With Map. Post 8vo. Cloth, price 6*s.*

ALLEN (Grant), B.A.
Physiological Æsthetics. Large post 8vo. 9*s.*

AMOS (Prof. Sheldon).
Science of Law. Third Edition. Crown 8vo. Cloth, price 5*s.*
Volume X. of The International Scientific Series.

ANDERSON (Rev. C.), M.A.
New Readings of Old Parables. Demy 8vo. Cloth, price 4*s.* 6*d.*

Church Thought and Church Work. Edited by. Second Edition. Demy 8vo. Cloth, price 7*s.* 6*d.*

The Curate of Shyre. Second Edition. 8vo. Cloth, price 7*s.* 6*d.*

ANDERSON (Col. R. P.).
Victories and Defeats. An Attempt to explain the Causes which have led to them. An Officer's Manual. Demy 8vo. Cloth, price 14*s.*

ANDERSON (R. C.), C.E.
Tables for Facilitating the Calculation of every Detail in connection with Earthen and Masonry Dams. Royal 8vo. Cloth, price £2 2s.

ANSON (Lieut.-Col. The Hon. A.), V.C., M.P.
The Abolition of Purchase and the Army Regulation Bill of 1871. Crown 8vo. Sewed, price 1s.
Army Reserves and Militia Reforms. Crown 8vo. Sewed, price 1s.
Story of the Supersessions. Crown 8vo. Sewed, price 6d.

ARCHER (Thomas).
About my Father's Business. Work amidst the Sick, the Sad, and the Sorrowing. Crown 8vo. Cloth, price 5s.

ARGYLE (Duke of).
Speeches on the Second Reading of the Church Patronage (Scotland) Bill in the House of Lords, June 2, 1874; and Earl of Camperdown's Amendment, June 9, 1874, placing the Election of Ministers in the hands of Ratepayers. Crown 8vo. Sewed, price 1s.
Army of the North German Confederation.
A Brief Description of its Organization, of the Different Branches of the Service and their *rôle* in War, of its Mode of Fighting, &c., &c. Translated from the Corrected Edition, by permission of the Author, by Colonel Edward Newdigate. Demy 8vo. Cloth, price 5s.

AUBERTIN (J. J.).
Camoens' Lusiads. Portuguese Text, with Translation by. With Map and Portraits. 2 vols. Demy 8vo. Price 30s.
Aunt Mary's Bran Pie.
By the author of "St. Olave's." Illustrated. Cloth, price 3s. 6d.
Aurora.
A Volume of Verse. Fcap. 8vo. Cloth, price 5s.

BAGEHOT (Walter).
Some Articles on the Depreciation of Silver, and Topics connected with it. Demy 8vo. Price 5s.

BAGEHOT (Walter)—*continued.*
Physics and Politics; or, Thoughts on the Application of the Principles of "Natural Selection" and "Inheritance" to Political Society. Fourth Edition. Crown 8vo. Cloth, price 4s.
Volume II. of The International Scientific Series.
The English Constitution.
A New Edition, Revised and Corrected, with an Introductory Dissertation on Recent Changes and Events. Crown 8vo. Cloth, price 7s. 6d.
Lombard Street. A Description of the Money Market. Seventh Edition. Crown 8vo. Cloth, price 7s. 6d.

BAGOT (Alan).
Accidents in Mines: their Causes and Prevention. Crown 8vo. Cloth, price 6s.

BAIN (Alexander), LL.D.
Mind and Body: the Theories of their relation. Fifth Edition. Crown 8vo. Cloth, price 4s.
Volume IV. of The International Scientific Series.

BAKER (Sir Sherston, Bart.).
Halleck's International Law; or Rules Regulating the Intercourse of States in Peace and War. A New Edition, revised, with Notes and Cases. 2 vols. Demy 8vo. Cloth, price 38s.

BALDWIN (Capt. J. H.), F.Z.S.
The Large and Small Game of Bengal and the North-Western Provinces of India. 4to. With numerous Illustrations. Second Edition. Cloth, price 21s.

BANKS (Mrs. G. L.).
God's Providence House. New Edition. Crown 8vo. Cloth, price 3s. 6d.

BARING (T. C.), M.A., M.P.
Pindar in English Rhyme. Being an Attempt to render the Epinikian Odes with the principal remaining Fragments of Pindar into English Rhymed Verse. Small Quarto. Cloth, price 7s.

BARLEE (Ellen).
Locked Out: a Tale of the Strike. With a Frontispiece. Royal 16mo. Cloth, price 1s. 6d.

BARNES (William).

An Outline of English Speechcraft. Crown 8vo. Cloth, price 4*s.*

BARTLEY (George C. T.).

Domestic Economy: Thrift in Every Day Life. Taught in Dialogues suitable for Children of all ages. Small crown 8vo. Cloth, limp, 2*s.*

BAUR (Ferdinand), Dr. Ph.

A Philological Introduction to Greek and Latin for Students. Translated and adapted from the German of. By C. KEGAN PAUL, M.A. Oxon., and the Rev. E. D. STONE, M.A., late Fellow of King's College, Cambridge, and Assistant Master at Eton. Crown 8vo. Cloth, price 6*s.*

BAYNES (Rev. Canon R. H.)

At the Communion Time. A Manual for Holy Communion. With a preface by the Right Rev. the Lord Bishop of Derry and Raphoe. Cloth, price 1*s.* 6*d.*

*** Can also be had bound in French morocco, price 2*s.* 6*d.*; Persian morocco, price 3*s.*; Calf, or Turkey morocco, price 3*s.* 6*d.*

Home Songs for Quiet Hours. Fourth and cheaper Edition. Fcap. 8vo. Cloth, price 2*s.* 6*d.*

This may also be had handsomely bound in morocco with gilt edges.

BECKER (Bernard H.).

The Scientific Societies of London. Crown 8vo. Cloth, price 5*s.*

BELLINGHAM (Henry), Barrister-at-Law.

Social Aspects of Catholicism and Protestantism in their Civil Bearing upon Nations. Translated and adapted from the French of M. le Baron de Haulleville. With a Preface by His Eminence Cardinal Manning. Crown 8vo. Cloth, price 6*s.*

BENNETT (Dr. W. C.).

Narrative Poems & Ballads. Fcap. 8vo. Sewed in Coloured Wrapper, price 1*s.*

BENNETT (Dr. W. C.)—*continued.*

Songs for Sailors. Dedicated by Special Request to H. R. H. the Duke of Edinburgh. With Steel Portrait and Illustrations. Crown 8vo. Cloth, price 3*s.* 6*d.*

An Edition in Illustrated Paper Covers, price 1*s.*

Songs of a Song Writer. Crown 8vo. Cloth, price 6*s.*

BENNIE (Rev. J. N.), M.A.

The Eternal Life. Sermons preached during the last twelve years. Crown 8vo. Cloth, price 6*s.*

BERNARD (Bayle).

Samuel Lover, the Life and Unpublished Works of. In 2 vols. With a Steel Portrait. Post 8vo. Cloth, price 21*s.*

BERNSTEIN (Prof.).

The Five Senses of Man. With 91 Illustrations. Second Edition. Crown 8vo. Cloth, price 5*s.*

Volume XXI. of The International Scientific Series.

BETHAM-EDWARDS (Miss M.).

Kitty. With a Frontispiece. Crown 8vo. Cloth, price 6*s.*

BISCOE (A. C.).

The Earls of Middleton, Lords of Clermont and of Fettercairn, and the Middleton Family. Crown 8vo. Cloth, price 10*s.* 6*d.*

BISSET (A.)

History of the Struggle for Parliamentary Government in England. 2 vols. Demy 8vo. Cloth, price 24*s.*

BLASERNA (Prof. Pietro).

The Theory of Sound in its Relation to Music. With numerous Illustrations. Crown 8vo. Cloth, price 5*s.*

Volume XXII. of The International Scientific Series.

Blue Roses; or, Helen Malinofska's Marriage. By the Author of "Véra." 2 vols. Fifth Edition. Cloth, gilt tops, 12*s.*

*** Also a Cheaper Edition in 1 vol. With frontispiece. Crown 8vo. Cloth, price 6*s.*

BLUME (Major W.).

The Operations of the German Armies in France, from Sedan to the end of the war of 1870-71. With Map. From the Journals of the Head-quarters Staff. Translated by the late E. M. Jones, Maj. 20th Foot, Prof. of Mil. Hist., Sandhurst. Demy 8vo. Cloth, price 9*s.*

BOGUSLAWSKI (Capt. A. von).

Tactical Deductions from the War of 1870-71. Translated by Colonel Sir Lumley Graham, Bart., late 18th (Royal Irish) Regiment. Third Edition, Revised and Corrected. Demy 8vo. Cloth, price 7*s.*

BONWICK (J.), F.R.G.S.

Egyptian Belief and Modern Thought. Large post 8vo. Cloth, price 10*s.* 6*d.*

Pyramid Facts and Fancies. Crown 8vo. Cloth, price 5*s.*

The Tasmanian Lily. With Frontispiece. Crown 8vo. Cloth, price 5*s.*

Mike Howe, the Bushranger of Van Diemen's Land. With Frontispiece. Crown 8vo. Cloth, price 5*s.*

BOSWELL (R. B.), M.A., Oxon.

Metrical Translations from the Greek and Latin Poets, and other Poems. Crown 8vo. Cloth, price 5*s.*

BOWEN (H. C.), M. A.

Studies in English, for the use of Modern Schools. Small Crown 8vo. Cloth, price 1*s.* 6*d.*

BOWRING (L.), C.S.I.

Eastern Experiences. Illustrated with Maps and Diagrams. Demy 8vo. Cloth, price 16*s.*

BOWRING (Sir John).

Autobiographical Recollections. With Memoir by Lewin B. Bowring. Demy 8vo. Price 14*s.*

BRADLEY (F. H.).

Ethical Studies. Critical Essays in Moral Philosophy. Large post 8vo. Cloth, price 9*s.*

BRADLEY (F. H.)—*continued.*

Mr. Sidgwick's Hedonism: an Examination of the Main Argument of "The Methods of Ethics." Demy 8vo., sewed, price 2*s.* 6*d.*

Brave Men's Footsteps. By the Editor of "Men who have Risen." A Book of Example and Anecdote for Young People. With Four Illustrations by C. Doyle. Third Edition. Crown 8vo. Cloth, price 3*s.* 6*d.*

BRIALMONT (Col. A.).

Hasty Intrenchments. Translated by Lieut. Charles A. Empson, R. A. With Nine Plates. Demy 8vo. Cloth, price 6*s.*

BROOKE (Rev. J. M. S.), M. A.

Heart, be Still. A Sermon preached in Holy Trinity Church, Southall. Imperial 32mo. Sewed, price 6*d.*

BROOKE (Rev. S. A.), M. A.

The Late Rev. F. W. Robertson, M.A., Life and Letters of. Edited by.

I. Uniform with the Sermons. 2 vols. With Steel Portrait. Price 7*s.* 6*d.*

II. Library Edition. 8vo. With Two Steel Portraits. Price 12*s.*

III. A Popular Edition, in 1 vol. 8vo. Price 6*s.*

Theology in the English Poets. — COWPER, COLERIDGE, WORDSWORTH, and BURNS. Third Edition. Post 8vo. Cloth, price 9*s.*

Christ in Modern Life. Eleventh Edition. Crown 8vo. Cloth, price 7*s.* 6*d.*

Sermons. First Series. Ninth Edition. Crown 8vo. Cloth, price 6*s.*

Sermons. Second Series. Third Edition. Crown 8vo. Cloth, price 7*s.*

The Fight of Faith. Sermons preached on various occasions. Third Edition. Crown 8vo. Cloth, price 7*s.* 6*d.*

Frederick Denison Maurice: The Life and Work of. A Memorial Sermon. Crown 8vo. Sewed, price 1*s.*

BROOKE (W. G.), M.A.

The Public Worship Regulation Act. With a Classified Statement of its Provisions, Notes, and Index. Third Edition, revised and corrected. Crown 8vo. Cloth, price 3*s.* 6*d.*

Six Privy Council Judgments—1850-1872. Annotated by. Third Edition. Crown 8vo. Cloth, price 9*s.*

BROUN (J. A.).

Magnetic Observations at Trevandrum and Augustia Malley. Vol. I. 4to. Cloth, price 63*s.*

The Report from above, separately sewed, price 21*s.*

BROWN (Rev. J. Baldwin), B.A.

The Higher Life. Its Reality, Experience, and Destiny. Fourth Edition. Crown 8vo. Cloth, price 7*s.* 6*d.*

Doctrine of Annihilation in the Light of the Gospel of Love. Five Discourses. Third Edition. Crown 8vo. Cloth, price 2*s.* 6*d.*

BROWN (J. Croumbie), LL.D.

Reboisement in France; or, Records of the Replanting of the Alps, the Cevennes, and the Pyrenees with Trees, Herbage, and Bush. Demy 8vo. Cloth, price 12*s.* 6*d.*

The Hydrology of Southern Africa. Demy 8vo. Cloth, price 10*s.* 6*d.*

BRYANT (W. C.)

Poems. Red-line Edition. With 24 Illustrations and Portrait of the Author. Crown 8vo. Cloth extra, price 7*s.* 6*d.*

A Cheaper Edition, with Frontispiece. Small crown 8vo. Cloth, price 3*s.* 6*d.*

BUCHANAN (Robert).

Poetical Works. Collected Edition, in 3 vols., with Portrait. Crown 8vo. Cloth, price 6*s.* each.

Master-Spirits. Post 8vo. Cloth, price 10*s.* 6*d.*

BULKELEY (Rev. H. J.).

Walled in, and other Poems. Crown 8vo. Cloth, price 5*s.*

BURCKHARDT (Jacob).

The Civilization of the Period of the Renaissance in Italy. Authorized translation, by S. G. C. Middlemore. 2 vols. Demy 8vo. Cloth, price 24*s.*

BURTON (Mrs. Richard).

The Inner Life of Syria, Palestine, and the Holy Land. With Maps, Photographs, and Coloured Plates. 2 vols. Second Edition. Demy 8vo. Cloth, price 24*s.*

BURTON (Capt. Richard F.).

The Gold Mines of Midian and the Ruined Midianite Cities. A Fortnight's Tour in North Western Arabia. With numerous Illustrations. Second Edition. Demy 8vo. Cloth, price 18*s.*

CALDERON.

Calderon's Dramas: The Wonder-Working Magician—Life is a Dream—The Purgatory of St. Patrick. Translated by Denis Florence MacCarthy. Post 8vo. Cloth, price 10*s.*

CARLISLE (A. D.), B. A.

Round the World in 1870. A Volume of Travels, with Maps. New and Cheaper Edition. Demy 8vo. Cloth, price 6*s.*

CARNE (Miss E. T.).

The Realm of Truth. Crown 8vo. Cloth, price 5*s.* 6*d.*

CARPENTER (E.).

Narcissus and other Poems. Fcap. 8vo. Cloth, price 5*s.*

CARPENTER (W. B.), LL.D., M.D., F.R.S., &c.

The Principles of Mental Physiology. With their Applications to the Training and Discipline of the Mind, and the Study of its Morbid Conditions. Illustrated. Fourth Edition. 8vo. Cloth, price 12*s.*

CAVALRY OFFICER.

Notes on Cavalry Tactics, Organization, &c. With Diagrams. Demy 8vo. Cloth, price 12*s.*

CHAPMAN (Hon. Mrs. E. W.).

A Constant Heart. A Story. 2 vols. Cloth, gilt tops, price 12*s.*

Children's Toys, and some Elementary Lessons in General Knowledge which they teach. Illustrated. Crown 8vo. Cloth, price 5*s.*

CHRISTOPHERSON (The late Rev. Henry), M.A.

Sermons. With an Introduction by John Rae, LL.D., F.S.A. Second Series. Crown 8vo. Cloth, price 6*s.*

CLERK (Mrs. Godfrey).

'Ilâm en Nâs. Historical Tales and Anecdotes of the Times of the Early Khalifahs. Translated from the Arabic Originals. Illustrated with Historical and Explanatory Notes. Crown 8vo. Cloth, price 7*s.*

CLERY (C.), Capt.

Minor Tactics. With 26 Maps and Plans. Third and revised Edition. Demy 8vo. Cloth, price 16*s.*

CLODD (Edward), F.R.A.S.

The Childhood of the World: a Simple Account of Man in Early Times. Third Edition. Crown 8vo. Cloth, price 3*s.*

A Special Edition for Schools. Price 1*s.*

The Childhood of Religions. Including a Simple Account of the Birth and Growth of Myths and Legends. Third Thousand. Crown 8vo. Cloth, price 5*s.*

A Special Edition for Schools. Price 1*s.* 6*d.*

COLERIDGE (Sara).

Pretty Lessons in Verse for Good Children, with some Lessons in Latin, in Easy Rhyme. A New Edition. Illustrated. Fcap. 8vo. Cloth, price 3*s.* 6*d.*

Phantasmion. A Fairy Tale. With an Introductory Preface by the Right Hon. Lord Coleridge, of Ottery St. Mary. A New Edition. Illustrated. Crown 8vo. Cloth, price 7*s.* 6*d.*

COLERIDGE (Sara)—*continued.*

Memoir and Letters of Sara Coleridge. Edited by her Daughter. With Index. 2 vols. With Two Portraits. Third Edition, Revised and Corrected. Crown 8vo. Cloth, price 24*s.*

Cheap Edition. With one Portrait. Cloth, price 7*s.* 6*d.*

COLLINS (Mortimer).

Inn of Strange Meetings, and other Poems. Crown 8vo. Cloth, price 5*s.*

COLLINS (Rev. R.), M.A.

Missionary Enterprise in the East. With special reference to the Syrian Christians of Malabar, and the results of modern Missions. With Four Illustrations. Crown 8vo. Cloth, price 6*s.*

CONGREVE (Richard), M.A., M.R.C.P.L.

Human Catholicism. Two Sermons delivered at the Positivist School on the Festival of Humanity, 87 and 88, January 1, 1875 and 1876. Demy 8vo. Sewed, price 1*s.*

Religion of Humanity; the Annual Address delivered at the Positivist School, 19, Chapel-street, Lamb's Conduit-street, W.C., on the Festival of Humanity, January 1, 1878.

COOKE (M. C.), M.A., LL.D.

Fungi; their Nature, Influences, Uses, &c. Edited by the Rev. M. J. Berkeley, M.A., F.L.S. With Illustrations. Second Edition. Crown 8vo. Cloth, price 5*s.*

Volume XIV. of The International Scientific Series.

COOKE (Prof. J. P.)

The New Chemistry. With 31 Illustrations. Third Edition. Crown 8vo. Cloth, price 5*s.*

Volume IX. of The International Scientific Series.

Scientific Culture. Crown 8vo. Cloth, price 1*s.*

COOPER (T. T.), F.R.G.S.

The Mishmee Hills: an Account of a Journey made in an Attempt to Penetrate Thibet from Assam, to open New Routes for Commerce. Second Edition. With Four Illustrations and Map. Post 8vo. Cloth, price 10*s.* 6*d.*

Cornhill Library of Fiction (The). Crown 8vo. Cloth, price 3*s.* 6*d.* per volume.

Half-a-Dozen Daughters. By J. Masterman.

The House of Raby. By Mrs. G. Hooper.

A Fight for Life. By Moy Thomas.

Robin Gray. By Charles Gibbon.

One of Two; or, A Left-Handed Bride. By J. Hain Friswell.

God's Providence House. By Mrs. G. L. Banks.

For Lack of Gold. By Charles Gibbon.

Abel Drake's Wife. By John Saunders.

Hirell. By John Saunders.

CORY (Lieut. Col. Arthur).

The Eastern Menace; or, Shadows of Coming Events. Crown 8vo. Cloth, price 5*s.*

Ione. A Poem in Four Parts. Fcap. 8vo. Cloth, price 5*s.*

Cosmos. A Poem. Fcap. 8vo. Cloth, price 3*s.* 6*d.*

COX (Rev. Sir G. W.), Bart.

A History of Greece from the Earliest Period to the end of the Persian War. 2 vols. Demy 8vo. Cloth, price 36*s.*

The Mythology of the Aryan Nations. 2 vols. Demy 8vo. Cloth, price 28*s.*

A General History of Greece from the Earliest Period to the Death of Alexander the Great, with a sketch of the subsequent History to the present time. Crown 8vo. Cloth, price 7*s.* 6*d.*

Tales of Ancient Greece. Third Edition. Small Crown 8vo. Cloth, price 6*s.*

School History of Greece. With Maps. Fcap. 8vo. Cloth, price 3*s.* 6*d.*

The Great Persian War from the Histories of Herodotus. New Edition. Fcap. 8vo. Cloth, price, 3*s.* 6*d.*

A Manual of Mythology in the form of Question and Answer. Third Edition. Fcap. 8vo. Cloth, price 3*s.*

COX (Rev. Samuel).

Salvator Mundi; or, Is Christ the Saviour of all Men? Fifth Edition. Crown 8vo. Cloth, price 5*s*

CRESSWELL (Mrs. G.).

The King's Banner. Drama in Four Acts. Five Illustrations. 4to. Cloth, price 10*s.* 6*d.*

CROMPTON (Henry).

Industrial Conciliation. Fcap. 8vo. Cloth, price 2*s.* 6*d.*

CUMMINS (H. I.), M. A.

Parochial Charities of the City of London. Sewed, price 1*s.*

CURWEN (Henry).

Sorrow and Song: Studies of Literary Struggle. Henry Mürger —Novalis—Alexander Petöfi—Honoré de Balzac—Edgar Allan Poe —André Chénier. 2 vols. Crown 8vo. Cloth, price 15*s.*

DANCE (Rev. C. D.).

Recollections of Four Years in Venezuela. With Three Illustrations and a Map. Crown 8vo. Cloth, price 7*s.* 6*d.*

D'ANVERS (N. R.).

The Suez Canal: Letters and Documents descriptive of its Rise and Progress in 1854-56. By Ferdinand de Lesseps. Translated by. Demy 8vo. Cloth, price 10*s.* 6*d.*

Little Minnie's Troubles. An Every-day Chronicle. With Four Illustrations by W. H. Hughes. Fcap. Cloth, price 3*s.* 6*d.*

Pixie's Adventures; or, the Tale of a Terrier. With 21 Illustrations. 16mo. Cloth, price 4*s.* 6*d.*

DAVIDSON (Rev. Samuel), D.D., LL.D.

The New Testament, translated from the Latest Greek Text of Tischendorf. A new and thoroughly revised Edition. Post 8vo. Cloth, price 10*s.* 6*d.*

Canon of the Bible: Its Formation, History, and Fluctuations. Second Edition. Small crown 8vo. Cloth, price 5*s.*

DAVIES (G. Christopher).

Mountain, Meadow, and Mere: a Series of Outdoor Sketches of Sport, Scenery, Adventures, and Natural History. With Sixteen Illustrations by Bosworth W. Harcourt. Crown 8vo. Cloth, price 6*s*.

Rambles and Adventures of Our School Field Club. With Four Illustrations. Crown 8vo. Cloth, price 5*s*.

DAVIES (Rev. J. L.), M.A.

Theology and Morality. Essays on Questions of Belief and Practice. Crown 8vo. Cloth, price 7*s*. 6*d*.

DAWSON (George), M.A.

Prayers, with a Discourse on Prayer. Edited by his Wife. Fifth Edition. Crown 8vo. Price 6*s*.

Sermons on Disputed Points and Special Occasions. Edited by his Wife. Second Edition. Crown 8vo. Cloth, price 6*s*.

Sermons on Daily Life and Duty. Edited by his Wife. Second Edition. Crown 8vo. Cloth, price 6*s*.

DE L'HOSTE (Col. E. P.).

The Desert Pastor, Jean Jarousseau. Translated from the French of Eugène Pelletan. With a Frontispiece. New Edition. Fcap. 8vo. Cloth, price 3*s*. 6*d*.

DE REDCLIFFE (Viscount Stratford), P.C., K.G., G.C.B.

Why am I a Christian? Fifth Edition. Crown 8vo. Cloth, price 3*s*.

DE TOCQUEVILLE (A.).

Correspondence and Conversations of, with Nassau William Senior, from 1834 to 1859. Edited by M. C. M. Simpson. 2 vols. Post 8vo. Cloth, price 21*s*.

DE VERE (Aubrey).

Alexander the Great. A Dramatic Poem. Small crown 8vo. Cloth, price 5*s*.

The Infant Bridal, and Other Poems. A New and Enlarged Edition. Fcap. 8vo. Cloth, price 7*s*. 6*d*.

DE VERE (Aubrey).—*continued.*

The Legends of St. Patrick, and Other Poems. Small crown 8vo. Cloth, price 5*s*.

St. Thomas of Canterbury. A Dramatic Poem. Large fcap. 8vo. Cloth, price 5*s*.

Antar and Zara: an Eastern Romance. INISFAIL, and other Poems, Meditative and Lyrical. Fcap. 8vo. Price 6*s*.

The Fall of Rora, the Search after Proserpine, and other Poems, Meditative and Lyrical. Fcap. 8vo. Price 6*s*.

DENNIS (J.).

English Sonnets. Collected and Arranged. Elegantly bound. Fcap. 8vo. Cloth, price 3*s*. 6*d*.

DOBSON (Austin).

Vignettes in Rhyme and Vers de Société. Third Edition. Fcap. 8vo. Cloth, price 5*s*.

Proverbs in Porcelain. By the Author of "Vignettes in Rhyme" Second Edition. Crown 8vo. 6*s*.

DOWDEN (Edward), LL.D.

Shakspere: a Critical Study of his Mind and Art. Third Edition. Large Post 8vo. Cloth, price 12*s*.

Studies in Literature, 1789-1877. Large Post 8vo. Cloth, price 12*s*.

Poems. Second Edition. Fcap. 8vo. Cloth, price 5*s*.

DOWNTON (Rev. H.), M.A.

Hymns and Verses. Original and Translated. Small crown 8vo. Cloth, price 3*s*. 6*d*.

DRAPER (J W.), M.D., LL.D.

History of the Conflict between Religion and Science. Eleventh Edition. Crown 8vo. Cloth, price 5*s*.

Volume XIII. of The International Scientific Series.

DREW (Rev. G. S.), M.A.

Scripture Lands in connection with their History. Second Edition. 8vo. Cloth, price 10*s.* 6*d.*

Nazareth: Its Life and Lessons. Third Edition. Crown 8vo. Cloth, price 5*s.*

The Divine Kingdom on Earth as it is in Heaven. 8vo. Cloth, price 10*s.* 6*d.*

The Son of Man: His Life and Ministry. Crown 8vo. Cloth, price 7*s.* 6*d.*

DREWRY (G. O.), M.D.

The Common-Sense Management of the Stomach. Fourth Edition. Fcap. 8vo. Cloth, price 2*s.* 6*d.*

DREWRY (G. O.), M.D., and BARTLETT (H. C.), Ph.D., F.C.S.

Cup and Platter: or, Notes on Food and its Effects. Small 8vo. Cloth, price 2*s.* 6*d.*

DRUMMOND (Miss).

Tripps Buildings. A Study from Life, with Frontispiece. Small crown 8vo. Cloth, price 3*s.* 6*d.*

DURAND (Lady).

Imitations from the German of Spitta and Terstegen. Fcap. 8vo. Cloth, price 4*s.*

DU VERNOIS (Col. von Verdy).

Studies in leading Troops. An authorized and accurate Translation by Lieutenant H. J. T. Hildyard, 71st Foot. Parts I. and II. Demy 8vo. Cloth, price 7*s.*

EDEN (Frederick).

The Nile without a Dragoman. Second Edition. Crown 8vo. Cloth, price 7*s.* 6*d.*

EDMONDS (Herbert).

Well Spent Lives: a Series of Modern Biographies. Crown 8vo. Price 5*s.*

EDWARDS (Rev. Basil).

Minor Chords; Or, Songs for the Suffering: a Volume of Verse. Fcap. 8vo. Cloth, price 3*s.* 6*d.*; paper, price 2*s.* 6*d.*

ELLIOT (Lady Charlotte).

Medusa and other Poems. Crown 8vo. Cloth, price 6*s.*

ELLIOTT (Ebenezer), The Corn Law Rhymer.

Poems. Edited by his son, the Rev. Edwin Elliott, of St. John's, Antigua. 2 vols. Crown 8vo. Cloth, price 18*s.*

ELSDALE (Henry).

Studies in Tennyson's Idylls. Crown 8vo. Cloth, price 5*s.*

ENGLISH CLERGYMAN.

An Essay on the Rule of Faith and Creed of Athanasius. Shall the Rubric preceding the Creed be removed from the Prayer-book? Sewed. 8vo. Price 1*s.*

Epic of Hades (The).

By a New Writer. Author of "Songs of Two Worlds." Fourth and finally revised Edition. Fcap. 8vo. Cloth, price 7*s.* 6*d.*

Eros Agonistes.

Poems. By E. B. D. Fcap. 8vo. Cloth, price 3*s.* 6*d.*

Essays on the Endowment of Research.

By Various Writers.

LIST OF CONTRIBUTORS.

Mark Pattison, B.D.
James S. Cotton, B.A.
Charles E. Appleton, D.C.L.
Archibald H. Sayce, M.A.
Henry Clifton Sorby, F.R.S.
Thomas K. Cheyne, M.A.
W. T. Thiselton Dyer, M.A.
Henry Nettleship, M.A.

Square crown octavo. Cloth, price 10*s.* 6*d.*

EVANS (Mark).

The Gospel of Home Life. Crown 8vo. Cloth, price 4*s.* 6*d.*

The Story of our Father's Love, told to Children; being a New and Enlarged Edition of Theology for Children. With Four Illustrations. Fcap. 8vo. Cloth, price 3*s.* 6*d.*

A Book of Common Prayer and Worship for Household Use, compiled exclusively from the Holy Scriptures. Fcap. 8vo. Cloth, price 2*s.* 6*d.*

EX-CIVILIAN.
Life in the Mofussil: or, Civilian Life in Lower Bengal. 2 vols. Large post 8vo. Price 14*s.*

EYRE (Maj.-Gen. Sir V.), C.B., K.C.S.I., &c.
Lays of a Knight-Errant in many Lands. Square crown 8vo. With Six Illustrations. Cloth, price 7*s.* 6*d.*

FARQUHARSON (M.).
I. Elsie Dinsmore. Crown 8vo. Cloth, price 3*s.* 6*d.*
II. Elsie's Girlhood. Crown 8vo. Cloth, price 3*s.* 6*d.*
III. Elsie's Holidays at Roselands. Crown 8vo. Cloth, price 3*s.* 6*d.*

FERRIS (Henry Weybridge).
Poems. Fcap. 8vo. Cloth, price 5*s.*

Folkestone Ritual Case (The). The Argument, Proceedings Judgment, and Report, revised by the several Counsel engaged. Demy 8vo. Cloth, price 25*s.*

FOOTMAN (Rev. H.), M.A.
From Home and Back; or, Some Aspects of Sin as seen in the Light of the Parable of the Prodigal. Crown 8vo. Cloth, price 5*s.*

FOWLE (Rev. Edmund).
Latin Primer Rules made Easy. Crown 8vo. Cloth, price 3*s.*

FOWLE (Rev. T. W.), M.A.
The Reconciliation of Religion and Science. Being Essays on Immortality, Inspiration, Miracles, and the Being of Christ. Demy 8vo. Cloth, price 10*s.* 6*d.*

FOX-BOURNE (H. R.).
The Life of John Locke, 1632—1704. 2 vols. Demy 8vo. Cloth, price 28*s.*

FRASER (Donald).
Exchange Tables of Sterling and Indian Rupee Currency, upon a new and extended system, embracing Values from One Farthing to One Hundred Thousand Pounds, and at Rates progressing, in Sixteenths of a Penny, from 1*s.* 9*d.* to 2*s.* 3*d.* per Rupee. Royal 8vo. Cloth, price 10*s.* 6*d.*

FRISWELL (J. Hain).
The Better Self. Essays for Home Life. Crown 8vo. Cloth, price 6*s.*
One of Two; or, A Left-Handed Bride. With a Frontispiece. Crown 8vo. Cloth, price 3*s.* 6*d.*

FYTCHE (Lieut.-Gen. Albert), C.S.I., late Chief Commissioner of British Burma.
Burma Past and Present, with Personal Reminiscences of the Country. With Steel Portraits, Chromolithographs, Engravings on Wood, and Map. 2 vols. Demy 8vo. Cloth, price 30*s.*

GAMBIER (Capt. J. W.), R.N.
Servia. Crown 8vo. Cloth, price 5*s.*

GARDNER (H.).
Sunflowers. A Book of Verses. Fcap. 8vo. Cloth, price 5*s.*

GARDNER (J.), M.D.
Longevity: The Means of Prolonging Life after Middle Age. Fourth Edition, revised and enlarged. Small crown 8vo. Cloth, price 4*s.*

GARRETT (E.).
By Still Waters. A Story for Quiet Hours. With Seven Illustrations. Crown 8vo. Cloth, price 6*s.*

G. H. T.
Verses, mostly written in India. Crown 8vo. Cloth, price 6*s.*

GIBBON (Charles).
For Lack of Gold. With a Frontispiece. Crown 8vo. Illustrated Boards, price 2*s.*
Robin Gray. With a Frontispiece. Crown 8vo. Illustrated boards, price 2*s.*

GILBERT (Mrs.).
Autobiography and other Memorials. Edited by Josiah Gilbert. Third Edition. With Portrait and several Wood Engravings. Crown 8vo. Cloth, price 7*s.* 6*d.*

GILL (Rev. W. W.), B.A.

Myths and Songs from the South Pacific. With a Preface by F. Max Müller, M.A., Professor of Comparative Philology at Oxford. Post 8vo. Cloth, price 9*s.*

GODKIN (James).

The Religious History of Ireland: Primitive, Papal, and Protestant. Including the Evangelical Missions, Catholic Agitations, and Church Progress of the last half Century. 8vo. Cloth, price 12*s.*

GOETZE (Capt. A. von).

Operations of the German Engineers during the War of 1870-1871. Published by Authority, and in accordance with Official Documents. Translated from the German by Colonel G. Graham, V.C., C.B., R.E. With 6 large Maps. Demy 8vo. Cloth, price 21*s.*

GODWIN (William).

William Godwin: His Friends and Contemporaries. With Portraits and Facsimiles of the handwriting of Godwin and his Wife. By C. Kegan Paul. 2 vols. Demy 8vo. Cloth, price 28*s.*

The Genius of Christianity Unveiled. Being Essays never before published. Edited, with a Preface, by C. Kegan Paul. Crown 8vo. Cloth, price 7*s.* 6*d.*

GOLDIE (Lieut. M. H. G.)

Hebe: a Tale. Fcap. 8vo. Cloth, price 5*s.*

GOODENOUGH (Commodore J. G.), R.N., C.B., C.M.G.

Memoir of, with Extracts from his Letters and Journals. Edited by his Widow. With Steel Engraved Portrait. Square 8vo. Cloth, 5*s.*

*** Also a Library Edition with Maps, Woodcuts, and Steel Engraved Portrait. Square post 8vo Cloth, price 14*s.*

GOODMAN (W.).

Cuba, the Pearl of the Antilles. Crown 8vo. Cloth, price 7*s.* 6*d.*

GOULD (Rev. S. Baring), M.A.

The Vicar of Morwenstow: a Memoir of the Rev. R. S. Hawker. With Portrait. Third Edition, revised. Square post 8vo. Cloth, 10*s.* 6*d.*

GRANVILLE (A. B.), M.D., F.R.S., &c.

Autobiography of A. B. Granville, F.R.S., etc. Edited, with a brief account of the concluding years of his life, by his youngest Daughter, Paulina B. Granville. 2 vols. With a Portrait. Second Edition. Demy 8vo. Cloth, price 32*s.*

GREY (John), of Dilston.

John Grey (of Dilston): Memoirs. By Josephine E. Butler. New and Revised Edition. Crown 8vo. Cloth, price 3*s.* 6*d.*

GRIFFITH (Rev. T.), A.M.

Studies of the Divine Master. Demy 8vo. Cloth, price 12*s.*

GRIFFITHS (Capt. Arthur).

Memorials of Millbank, and Chapters in Prison History. With Illustrations by R. Goff and the Author. 2 vols. Post 8vo. Cloth, price 21*s.*

GRIMLEY (Rev. H. N.), M.A., Professor of Mathematics in the University College of Wales.

Tremadoc Sermons, chiefly on the SPIRITUAL BODY, the UNSEEN WORLD, and the DIVINE HUMANITY. Second Edition. Crown 8vo. Cloth, price 6*s.*

GRÜNER (M. L.).

Studies of Blast Furnace Phenomena. Translated by L. D. B. Gordon, F.R.S.E., F.G.S. Demy 8vo. Cloth, price 7*s.* 6*d.*

GURNEY (Rev. Archer).

Words of Faith and Cheer. A Mission of Instruction and Suggestion. Crown 8vo. Cloth, price 6*s.*

First Principles in Church and State. Demy 8vo. Sewed, price 1*s.* 6*d.*

HAECKEL (Prof. Ernst).

The History of Creation. Translation revised by Professor E. Ray Lankester, M.A., F.R.S. With Coloured Plates and Genealogical Trees of the various groups of both plants and animals. 2 vols. Second Edition. Post 8vo. Cloth, price 32*s.*

The History of the Evolution of Man. With numerous Illustrations. 2 vols. Post 8vo.

HAKE (A. Egmont).

Paris Originals, with twenty etchings, by Léon Richeton. Large post 8vo. Cloth, price 14*s.*

Halleck's International Law or Rules. Regulating the Intercourse of States in Peace and War. A New Edition, revised, with Notes and Cases. 2 vols. Demy 8vo. Cloth, price 38*s.*

HARCOURT (Capt. A. F. P.).

The Shakespeare Argosy. Containing much of the wealth of Shakespeare's Wisdom and Wit, alphabetically arranged and classified. Crown 8vo. Cloth, price 6*s.*

HARDY (Thomas).

A Pair of Blue Eyes. New Edition. Crown 8vo. Cloth, price 6*s.*

HARRISON (Lieut.-Col. R.).

The Officer's Memorandum Book for Peace and War. Second Edition. Oblong 32mo. roan, elastic band and pencil, price 3*s.* 6*d.*; russia, 5*s.*

HAWEIS (Rev. H. R.), M.A.

Current Coin. Materialism—The Devil—Crime—Drunkenness—Pauperism—Emotion—Recreation—The Sabbath. Third Edition. Crown 8vo. Cloth, price 6*s.*

Speech in Season. Fourth Edition. Crown 8vo. Cloth, price 9*s.*

Thoughts for the Times. Tenth Edition. Crown 8vo. Cloth, price 7*s.* 6*d.*

HAWEIS (Rev. H. R.)—*continued.*

Unsectarian Family Prayers, for Morning and Evening for a Week, with short selected passages from the Bible. Second Edition. Square crown 8vo. Cloth, price 3*s.* 6*d.*

HAYMAN (H.), D.D., late Head Master of Rugby School.

Rugby School Sermons. With an Introductory Essay on the Indwelling of the Holy Spirit. Crown 8vo. Cloth, price 7*s.* 6*d.*

HELLWALD (Baron F. von).

The Russians in Central Asia. A Critical Examination, down to the present time, of the Geography and History of Central Asia. Translated by Lieut.-Col. Theodore Wirgman, LL.B. Large post 8vo. With Map. Cloth, price 12*s.*

HELVIG (Major H.).

The Operations of the Bavarian Army Corps. Translated by Captain G. S. Schwabe. With Five large Maps. In 2 vols. Demy 8vo. Cloth, price 24*s.*

Tactical Examples: Vol. I. The Battalion, price 15*s.* Vol. II. The Regiment and Brigade, price 10*s.* 6*d.* Translated from the German by Col. Sir Lumley Graham. With numerous Diagrams. Demy 8vo. Cloth.

HERFORD (Brooke).

The Story of Religion in England. A Book for Young Folk. Crown 8vo. Cloth, price 5*s.*

HEWLETT (Henry G.).

A Sheaf of Verse. Fcap. 8vo. Cloth, price 3*s.* 6*d.*

HINTON (James).

Life and Letters of. Edited by Ellice Hopkins, with an Introduction by Sir W. W. Gull, Bart., and Portrait engraved on Steel by C. H. Jeens. Crown 8vo. Cloth, 8*s.* 6*d.*

The Place of the Physician. To which is added ESSAYS ON THE LAW OF HUMAN LIFE, AND ON THE RELATION BETWEEN ORGANIC AND INORGANIC WORLDS. Second Edition. Crown 8vo. Cloth, price 3*s.* 6*d.*

HINTON (James).—*continued.*

Physiology for Practical Use. By various Writers. With 50 Illustrations. 2 vols. Second Edition. Crown 8vo. Cloth, price 12*s.* 6*d.*

An Atlas of Diseases of the Membrana Tympani. With Descriptive Text. Post 8vo. Price £6 6*s.*

The Questions of Aural Surgery. With Illustrations. 2 vols. Post 8vo. Cloth, price 12*s.* 6*d.*

H. J. C.

The Art of Furnishing. A Popular Treatise on the Principles of Furnishing, based on the Laws of Common Sense, Requirement, and Picturesque Effect. Small crown 8vo. Cloth, price 3*s.* 6*d.*

HOCKLEY (W. B.).

Tales of the Zenana; or, A Nuwab's Leisure Hours. By the Author of "Pandurang Hari." With a Preface by Lord Stanley of Alderley. 2 vols. Crown 8vo. Cloth, price 21*s.*

Pandurang Hari; or, Memoirs of a Hindoo. A Tale of Mahratta Life sixty years ago. With a Preface by Sir H. Bartle E. Frere, G.C.S.I., &c. Crown 8vo. Cloth, price 6*s.*

HOFFBAUER (Capt.).

The German Artillery in the Battles near Metz. Based on the official reports of the German Artillery. Translated by Capt. E. O. Hollist. With Map and Plans. Demy 8vo. Cloth, price 21*s.*

HOLMES (E. G. A.).

Poems. Fcap. 8vo. Cloth, price 5*s.*

HOLROYD (Major W. R. M.).

Tas-hil ul Kālām; or, Hindustani made Easy. Crown 8vo. Cloth, price 5*s.*

HOOPER (Mary).

Little Dinners: How to Serve them with Elegance and Economy. Thirteenth Edition. Crown 8vo. Cloth, price 5*s.*

HOOPER (Mary).—*continued.*

Cookery for Invalids, Persons of Delicate Digestion, and Children. Crown 8vo. Cloth, price 3*s.* 6*d.*

Every-Day Meals. Being Economical and Wholesome Recipes for Breakfast, Luncheon, and Supper. Second Edition. Crown 8vo. Cloth, price 5*s.*

HOOPER (Mrs. G.).

The House of Raby. With a Frontispiece. Crown 8vo. Cloth, price 3*s.* 6*d.*

HOPKINS (Ellice).

Life and Letters of James Hinton, with an Introduction by Sir W. W. Gull, Bart., and Portrait engraved on Steel by C. H. Jeens. Crown 8vo. Cloth, price 8*s.* 6*d.*

HOPKINS (M.).

The Port of Refuge; or, Counsel and Aid to Shipmasters in Difficulty, Doubt, or Distress. Crown 8vo. Second and Revised Edition. Cloth, price 6*s.*

HORNE (William), M.A.

Reason and Revelation: an Examination into the Nature and Contents of Scripture Revelation, as compared with other Forms of Truth. Demy 8vo. Cloth, price 12*s.*

HORNER (The Misses).

Walks in Florence. A New and thoroughly Revised Edition. 2 vols. crown 8vo. Cloth limp. With Illustrations.

Vol. I.—Churches, Streets, and Palaces. 10*s.* 6*d.* Vol. II.—Public Galleries and Museums. 5*s.*

HOWARD (Mary M.).

Beatrice Aylmer, and other Tales. Crown 8vo. Cloth, price 6*s.*

HOWARD (Rev. G. B.).

An Old Legend of St. Paul's. Fcap. 8vo. Cloth, price 4*s.* 6*d.*

HOWELL (James).

A Tale of the Sea, Sonnets, and other Poems. Fcap. 8vo. Cloth, price 5*s.*

HUGHES (Allison).

Penelope and other Poems. Fcap. 8vo. Cloth, price 4*s.* 6*d.*

HULL (Edmund C. P.).

The European in India. With a MEDICAL GUIDE FOR ANGLO-INDIANS. By R. R. S. Mair, M.D., F.R.C.S.E. Third Edition, Revised and Corrected. Post 8vo. Cloth, price 6*s*.

HUMPHREY (Rev. W.).

Mr. Fitzjames Stephen and Cardinal Bellarmine. Demy 8vo. Sewed, price 1*s*.

IGNOTUS.

Culmshire Folk. A Novel. New and Cheaper Edition. Crown 8vo. Cloth, price 6*s*.

INCHBOLD (J. W.).

Annus Amoris. Sonnets. Foolscap 8vo. Cloth, price 4*s*. 6*d*.

INGELOW (Jean).

The Little Wonder-horn. A Second Series of "Stories Told to a Child." With Fifteen Illustrations. Small 8vo. Cloth, price 2*s*. 6*d*.

Indian Bishoprics. By an Indian Churchman. Demy 8vo. 6*d*.

International Scientific Series (The).

I. The Forms of Water in Clouds and Rivers, Ice and Glaciers. By J. Tyndall, LL.D., F.R.S. With 25 Illustrations. Seventh Edition. Crown 8vo. Cloth, price 5*s*.

II. Physics and Politics; or, Thoughts on the Application of the Principles of "Natural Selection" and "Inheritance" to Political Society. By Walter Bagehot. Fourth Edition. Crown 8vo. Cloth, price 4*s*.

III. Foods. By Edward Smith, M.D., LL.B., F.R.S. With numerous Illustrations. Fifth Edition. Crown 8vo. Cloth, price 5*s*.

IV. Mind and Body: The Theories of their Relation. By Alexander Bain, LL.D. With Four Illustrations. Fifth Edition. Crown 8vo. Cloth, price 4*s*.

V. The Study of Sociology. By Herbert Spencer. Sixth Edition. Crown 8vo. Cloth, price 5*s*.

International Scientific Series (The)—*continued.*

VI. On the Conservation of Energy. By Balfour Stewart, M.A., LL.D., F.R.S. With 14 Illustrations. Fourth Edition. Crown 8vo. Cloth, price 5*s*.

VII. Animal Locomotion; or, Walking, Swimming, and Flying. By J. B. Pettigrew, M.D., F.R.S., etc. With 130 Illustrations. Second Edition. Crown 8vo. Cloth, price 5*s*.

VIII. Responsibility in Mental Disease. By Henry Maudsley, M.D. Third Edition. Crown 8vo. Cloth, price 5*s*.

IX. The New Chemistry. By Professor J. P. Cooke, of the Harvard University. With 31 Illustrations. Fourth Edition. Crown 8vo. Cloth, price 5*s*.

X. The Science of Law. By Professor Sheldon Amos. Third Edition. Crown 8vo. Cloth, price 5*s*.

XI. Animal Mechanism. A Treatise on Terrestrial and Aerial Locomotion. By Professor E. J. Marey. With 117 Illustrations. Second Edition. Crown 8vo. Cloth, price 5*s*.

XII. The Doctrine of Descent and Darwinism. By Professor Oscar Schmidt (Strasburg University). With 26 Illustrations. Third Edition. Crown 8vo. Cloth, price 5*s*.

XIII. The History of the Conflict between Religion and Science. By J. W. Draper, M.D., LL.D. Eleventh Edition. Crown 8vo. Cloth, price 5*s*.

XIV. Fungi; their Nature, Influences, Uses, &c. By M. C. Cooke, M.A., LL.D. Edited by the Rev. M. J. Berkeley, M.A., F.L.S. With numerous Illustrations. Second Edition. Crown 8vo. Cloth, price 5*s*.

XV. The Chemical Effects of Light and Photography. By Dr. Hermann Vogel (Polytechnic Academy of Berlin). With 100 Illustrations. Third and Revised Edition. Crown 8vo. Cloth, price 5*s*.

International Scientific Series (The)—*continued.*

XVI. The Life and Growth of Language. By William Dwight Whitney, Professor of Sanskrit and Comparative Philology in Yale College, New Haven. Second Edition. Crown 8vo. Cloth, price

XVII. Money and the Mechanism of Exchange. By W. Stanley Jevons, M.A., F.R.S. Third Edition. Crown 8vo. Cloth, price 5*s.*

XVIII. The Nature of Light: With a General Account of Physical Optics. By Dr. Eugene Lommel, Professor of Physics in the University of Erlangen. With 188 Illustrations and a table of Spectra in Chromo-lithography. Second Edition. Crown 8vo. Cloth, price 5*s.*

XIX. Animal Parasites and Messmates. By Monsieur Van Beneden, Professor of the University of Louvain, Correspondent of the Institute of France. With 83 Illustrations. Second Edition. Crown 8vo. Cloth, price 5*s.*

XX. Fermentation. By Professor Schützenberger, Director of the Chemical Laboratory at the Sorbonne. With 28 Illustrations. Second Edition. Crown 8vo. Cloth, price 5*s.*

XXI. The Five Senses of Man. By Professor Bernstein, of the University of Halle. With 91 Illustrations. Second Edition. Crown 8vo. Cloth, price 5*s.*

XXII. The Theory of Sound in its Relation to Music. By Professor Pietro Blaserna, of the Royal University of Rome. With numerous Illustrations. Second Edition. Crown 8vo. Cloth, price 5*s.*

XXIII. Studies in Spectrum Analysis. By J. Norman Lockyer. F.R.S. With six photographic Illustrations of Spectra, and numerous engravings on wood. Crown 8vo. Second Edition. Cloth, price 6*s.* 6*d.*

Forthcoming Volumes.

Prof. W. Kingdon Clifford, M.A. **The First Principles of the Exact Sciences explained to the Non-mathematical.**

International Scientific Series (The).

Forthcoming Vols.—continued.

W. B. Carpenter, LL.D., F.R.S. The Physical Geography of the Sea.

Sir John Lubbock, Bart., F.R.S. On Ants and Bees.

Prof. W. T. Thiselton Dyer, B.A., B.Sc. Form and Habit in Flowering Plants.

Prof. Michael Foster, M.D. Protoplasm and the Cell Theory.

H. Charlton Bastian, M.D., F.R.S. The Brain as an Organ of Mind.

Prof. A. C. Ramsay, LL.D., F.R.S. Earth Sculpture: Hills, Valleys, Mountains, Plains, Rivers, Lakes; how they were Produced, and how they have been Destroyed.

P. Bert (Professor of Physiology, Paris). Forms of Life and other Cosmical Conditions.

Prof. T. H. Huxley. The Crayfish: an Introduction to the Study of Zoology.

The Rev. A Secchi, D.J., late Director of the Observatory at Rome. The Stars.

Prof. J. Rosenthal, of the University of Erlangen. General Physiology of Muscles and Nerves.

Prof. A. de Quatrefages, Membre de l'Institut. The Human Race.

Prof. Thurston. The Steam Engine. With numerous Engravings.

Francis Galton, F.R.S. Psychometry.

J. W. Judd, F.R.S. The Laws of Volcanic Action.

Prof. F. N. Balfour. The Embryonic Phases of Animal Life.

J. Luys, Physician to the Hospice de la Salpétrière. The Brain and its Functions. With Illustrations.

Dr. Carl Semper. Animals and their Conditions of Existence.

Prof. Wurtz. Atoms and the Atomic Theory.

International Scientific Series (The).

Forthcoming Vols.—continued.

GEORGE J. ROMANES, F.L.S. Animal Intelligence.

ALFRED W. BENNETT. A Handbook of Cryptogamic Botany.

JACKSON (T. G.).

Modern Gothic Architecture. Crown 8vo. Cloth, price 5s.

JACOB (Maj.-Gen. Sir G. Le Grand), K.C.S.I., C.B.

Western India Before and during the Mutinies. Pictures drawn from life. Second Edition. Crown 8vo. Cloth, price 7s. 6d.

JENKINS (E.) and RAYMOND (J.), Esqs.

A Legal Handbook for Architects, Builders, and Building Owners. Second Edition Revised. Crown 8vo. Cloth, price 6s.

JENKINS (Rev. R. C.), M.A.

The Privilege of Peter and the Claims of the Roman Church confronted with the Scriptures, the Councils, and the Testimony of the Popes themselves. Fcap. 8vo. Cloth, price 3s. 6d.

JENNINGS (Mrs. Vaughan).

Rahel: Her Life and Letters. With a Portrait from the Painting by Daffinger. Square post 8vo. Cloth, price 7s. 6d.

JEVONS (W. Stanley), M.A., F.R.S.

Money and the Mechanism of Exchange. Second Edition. Crown 8vo. Cloth, price 5s.

Volume XVII. of The International Scientific Series.

JONES (Lucy).

Puddings and Sweets. Being Three Hundred and Sixty-Five Receipts approved by Experience. Crown 8vo., price 2s. 6d.

KAUFMANN (Rev. M.), B.A.

Socialism: Its Nature, its Dangers, and its Remedies considered. Crown 8vo. Cloth, price 7s. 6d.

KER (David).

The Boy Slave in Bokhara. A Tale of Central Asia. With Illustrations. Crown 8vo. Cloth, price 5s.

The Wild Horseman of the Pampas. Illustrated. Crown 8vo. Cloth, price 5s.

KING (Alice).

A Cluster of Lives. Crown 8vo. Cloth, price 7s. 6d.

KING (Mrs. Hamilton).

The Disciples. A Poem. Third Edition, with some Notes. Crown 8vo. Cloth, price 7s. 6d.

Aspromonte, and other Poems. Second Edition. Fcap. 8vo. Cloth, price 4s. 6d.

KINGSLEY (Charles), M.A.

Letters and Memories of his Life. Edited by his WIFE. With 2 Steel engraved Portraits and numerous Illustrations on Wood, and a Facsimile of his Handwriting. Eleventh Edition. 2 vols., demy 8vo. Cloth, price 36s.

All Saints' Day and other Sermons. Second Edition. Crown 8vo. Cloth, 7s. 6d.

Letters to Young Men on Betting and Gambling. 8vo. sewed, price 7s. 6d. per 100.

KNIGHT (A. F. C.).

Poems. Fcap 8vo. Cloth, price 5s.

LACORDAIRE (Rev. Père).

Life: Conferences delivered at Toulouse. A New and Cheaper Edition. Crown 8vo. Cloth, price 3s. 6d.

Lady of Lipari (The).

A Poem in Three Cantos. Fcap. 8vo. Cloth, price 5s.

LAMBERT (Cowley), F.R.G.S.

A Trip to Cashmere and Ladâk. With numerous Illustrations. Crown 8vo. Cloth, 7s. 6d.

LAURIE (J. S.).

Educational Course of Secular School Books for India: The First Hindustani Reader. Stiff linen wrapper, price 6*d.*

The Second Hindustani Reader. Stiff linen wrapper, price 6*d.*

The Oriental (English) Reader. Book I., price 6*d.*; II., price 7½*d.*; III., price 9*d.*; IV., price 1*s.*

Geography of India; with Maps and Historical Appendix, tracing the Growth of the British Empire in Hindustan. Fcap. 8vo. Cloth, price 1*s.* 6*d.*

LAYMANN (Capt.).

The Frontal Attack of Infantry. Translated by Colonel Edward Newdigate. Crown 8vo. Cloth, price 2*s.* 6*d.*

L. D. S.

Letters from China and Japan. With Illustrated Title-page. Crown 8vo. Cloth, price 7*s.* 6*d.*

LEANDER (Richard).

Fantastic Stories. Translated from the German by Paulina B. Granville. With Eight full-page Illustrations by M. E. Fraser-Tytler. Crown 8vo. Cloth, price 5*s.*

LEE (Rev. F. G.), D.C.L.

The Other World; or, Glimpses of the Supernatural. 2 vols. A New Edition. Crown 8vo. Cloth, price 15*s.*

LEE (Holme).

Her Title of Honour. A Book for Girls. New Edition. With a Frontispiece. Crown 8vo. Cloth, price 5*s.*

LENOIR (J.).

Fayoum; or, Artists in Egypt. A Tour with M. Gérome and others. With 13 Illustrations. A New and Cheaper Edition. Crown 8vo. Cloth, price 3*s.* 6*d.*

LEWIS (Mary A.).

A Rat with Three Tales. With Four Illustrations by Catherine F. Frere. Cloth, price 5*s.*

LOCKER (F.).

London Lyrics. A New and Revised Edition, with Additions and a Portrait of the Author. Crown 8vo. Cloth, elegant, price 6*s.*

Also, an Edition for the People. Fcap. 8vo. Cloth, price 2*s.* 6*d.*

LOCKYER (J. Norman), F.R.S.

Studies in Spectrum Analysis; with six photographic illustrations of Spectra, and numerous engravings on wood. Second Edition. Crown 8vo. Cloth, price 6*s.* 6*d.*

Vol. XXIII. of the International Scientific Series.

LOMMEL (Dr. E.).

The Nature of Light: With a General Account of Physical Optics. Second Edition. With 188 Illustrations and a Table of Spectra in Chromo-lithography. Second Edition. Crown 8vo. Cloth, price 5*s.*

Volume XVIII. of The International Scientific Series.

LORIMER (Peter), D.D.

John Knox and the Church of England: His Work in her Pulpit, and his Influence upon her Liturgy, Articles, and Parties. Demy 8vo. Cloth, price 12*s.*

John Wiclif and his English Precursors, by Gerhard Victor Lechler. Translated from the German, with additional Notes. 2 vols. Demy 8vo. Cloth, price 21*s.*

LOTHIAN (Roxburghe).

Dante and Beatrice from 1282 to 1290. A Romance. 2 vols. Post 8vo. Cloth, price 24*s.*

LOVER (Samuel), R.H.A.

The Life of Samuel Lover, R. H. A.; Artistic, Literary, and Musical. With Selections from his Unpublished Papers and Correspondence. By Bayle Bernard. 2 vols. With a Portrait. Post 8vo. Cloth, price 21*s.*

LUCAS (Alice).

Translations from the Works of German Poets of the 18th and 19th Centuries. Fcap. 8vo. Cloth, price 5*s.*

LYONS (R. T.), Surg.-Maj. Bengal Army.

A Treatise on Relapsing Fever. Post 8vo. Cloth, price *7s. 6d.*

MACAULAY (J.), M.A., M.D., Edin.

The Truth about Ireland: Tours of Observation in 1872 and 1875. With Remarks on Irish Public Questions. Being a Second Edition of "Ireland in 1872," with a New and Supplementary Preface. Crown 8vo. Cloth, price *3s. 6d.*

MAC CLINTOCK (L.).

Sir Spangle and the Dingy Hen. Illustrated. Square crown 8vo., price *2s. 6d.*

MAC DONALD (G.).

Malcolm. With Portrait of the Author engraved on Steel. Fourth Edition. Crown 8vo. Price *6s.*

The Marquis of Lossie. Second Edition. Crown 8vo. Cloth, price *6s.*

St. George and St. Michael. Crown 8vo. Cloth, *6s.*

MAC KENNA (S. J.).

Plucky Fellows. A Book for Boys. With Six Illustrations. Second Edition. Crown 8vo. Cloth, price *3s. 6d.*

At School with an Old Dragoon. With Six Illustrations. Second Edition. Crown 8vo. Cloth, price *5s.*

MACLACHLAN (A. N. C.), M.A.

William Augustus, Duke of Cumberland: being a Sketch of his Military Life and Character, chiefly as exhibited in the General Orders of His Royal Highness, 1745—1747. With Illustrations. Post 8vo. Cloth, price *15s.*

MACNAUGHT (Rev. John).

Cœna Domini: An Essay on the Lord's Supper, its Primitive Institution, Apostolic Uses, and Subsequent History. Demy 8vo. Cloth, price *14s.*

MAGNUSSON (Eirikr), M.A., and PALMER (E.H.), M.A.

Johan Ludvig Runeberg's Lyrical Songs, Idylls and Epigrams. Fcap. 8vo. Cloth, price *5s.*

MAIR (R. S.), M.D., F.R.C.S.E.

The Medical Guide for Anglo-Indians. Being a Compendium of Advice to Europeans in India, relating to the Preservation and Regulation of Health. With a Supplement on the Management of Children in India. Second Edition. Crown 8vo. Limp cloth, price *3s. 6d.*

MALDEN (H. E. and E. E.)

Princes and Princesses. Illustrated. Small crown 8vo. Cloth, price *2s. 6d.*

MANNING (His Eminence Cardinal).

Essays on Religion and Literature. By various Writers. Third Series. Demy 8vo. Cloth, price *10s. 6d.*

The Independence of the Holy See, with an Appendix containing the Papal Allocution and a translation. Cr. 8vo. Cloth, price *5s.*

The True Story of the Vatican Council. Crown 8vo. Cloth, price *5s.*

MAREY (E. J.).

Animal Mechanics. A Treatise on Terrestrial and Aerial Locomotion. With 117 Illustrations. Second Edition. Crown 8vo. Cloth, price *5s.*

Volume XI. of The International Scientific Series.

MARRIOTT (Maj.-Gen. W. F.), C.S.I.

A Grammar of Political Economy. Crown 8vo. Cloth, price *6s.*

MASTERMAN (J.).

Worth Waiting for. A New Novel. 3 vols. Crown 8vo. Cloth.

Half-a-dozen Daughters. With a Frontispiece. Crown 8vo. Cloth, price *3s. 6d.*

MAUDSLEY (Dr. H.).

Responsibility in Mental Disease. Second Edition. Crown 8vo. Cloth, price *5s.*

Volume VIII. of The International Scientific Series.

MAUGHAN (W. C.).

The Alps of Arabia; or, Travels through Egypt, Sinai, Arabia, and the Holy Land. With Map. Second Edition. Demy 8vo. Cloth, price *5s.*

MAURICE (C. E.).
Lives of English Popular Leaders. No. 1.—STEPHEN LANGTON. Crown 8vo. Cloth, price *7s. 6d.* No. 2.—TYLER, BALL, and OLDCASTLE. Crown 8vo. Cloth, price *7s. 6d.*

Mazzini (Joseph).
A Memoir. By E. A. V. Two Photographic Portraits. Second Edition. Crown 8vo. Cloth, price *5s.*

MEDLEY (Lieut.-Col. J. G.), R.E.
An Autumn Tour in the United States and Canada. Crown 8vo. Cloth, price *5s.*

MEREDITH (George).
The Ordeal of Richard Feverel. A History of Father and Son. In one vol. with Frontispiece. Crown 8vo. Cloth, price *6s.*

MICKLETHWAITE (J. T.), F.S.A.
Modern Parish Churches: Their Plan, Design, and Furniture. Crown 8vo. Cloth, price *7s. 6d.*

MIDDLETON (The Lady).
Ballads. Square 16mo. Cloth, price *3s. 6d.*

MILLER (Edward).
The History and Doctrines of Irvingism; or, the so-called Catholic and Apostolic Church. 2 vols. Large post 8vo. Cloth, price *25s.*

MILLER (Robert).
The Romance of Love. Fcap. 8vo. Cloth, price 5s.

MILNE (James).
Tables of Exchange for the Conversion of Sterling Money into Indian and Ceylon Currency, at Rates from *1s. 8d.* to *2s. 3d.* per Rupee. Second Edition. Demy 8vo. Cloth, price £2 *2s.*

MIVART (St. George), F.R.S.
Contemporary Evolution: An Essay on some recent Social Changes. Post 8vo. Cloth, price *7s. 6d.*

MOCKLER (E.).
A Grammar of the Baloochee Language, as it is spoken in Makran (Ancient Gedrosia), in the Persia-Arabic and Roman characters. Fcap. 8vo. Cloth, price *5s.*

MOFFAT (Robert Scott).
The Economy of Consumption; an Omitted Chapter in Political Economy, with special reference to the Questions of Commercial Crises and the Policy of Trades Unions; and with Reviews of the Theories of Adam Smith, Ricardo, J. S. Mill, Fawcett, &c. Demy 8vo. Cloth, price *18s.*

The Principles of a Time Policy: being an Exposition of a Method of Settling Disputes between Employers and Labourers in regard to Time and Wages, by a simple Process of Mercantile Barter, without recourse to Strikes or Locks-out. Reprinted from "The Economy of Consumption," with a Preface and Appendix containing Observations on some Reviews of that book, and a Recriticism of the Theories of Ricardo and J. S. Mill on Rent, Value, and Cost of Production. Demy 8vo. Cloth, price *3s. 6d.*

MOLTKE (Field-Marshal Von).
Letters from Russia. Translated by Robina Napier. Crown 8vo. Cloth, price *6s.*

MOORE (Rev. D.), M.A.
Christ and His Church. By the Author of "The Age and the Gospel," &c. Crown 8vo. Cloth, price *3s. 6d.*

MORE (R. Jasper).
Under the Balkans. Notes of a Visit to the District of Philippopolis in 1876. With a Map and Illustrations from Photographs. Crown 8vo. Cloth, price *6s.*

MORELL (J. R.).
Euclid Simplified in Method and Language. Being a Manual of Geometry. Compiled from the most important French Works, approved by the University of Paris and the Minister of Public Instruction. Fcap. 8vo. Cloth, price *2s. 6d.*

MORICE (Rev. F. D.), M.A.
The Olympian and Pythian Odes of Pindar. A New Translation in English Verse. Crown 8vo. Cloth, price *7s. 6d.*

MORLEY (Susan).
Aileen Ferrers. A Novel. 2 vols. Crown 8vo. Cloth.

Throstlethwaite. A Novel. 3 vols. Crown 8vo. Cloth.

MORLEY (Susan)—*continued.*

Margaret Chetwynd. A Novel. 3 vols. Crown 8vo. Cloth.

MORSE (E. S.), Ph.D.

First Book of Zoology. With numerous Illustrations. Crown 8vo. Cloth, price 5*s.*

MORSHEAD (E. D. A.)

The Agamemnon of Æschylus. Translated into English verse. With an Introductory Essay. Crown 8vo. Cloth, price 5*s.*

MOSTYN (Sydney).

Perplexity. A Novel. 3 vols. Crown 8vo. Cloth.

MUSGRAVE (Anthony).

Studies in Political Economy. Crown 8vo. Cloth, price 6*s.*

My Sister Rosalind.

A Novel. By the Author of "Christiana North," and "Under the Limes." 2 vols. Cloth.

NAAKÉ (J. T.).

Slavonic Fairy Tales. From Russian, Servian, Polish, and Bohemian Sources. With Four Illustrations. Crown 8vo. Cloth, price 5*s.*

NEWMAN (J. H.), D.D.

Characteristics from the Writings of. Being Selections from his various Works. Arranged with the Author's personal approval. Third Edition. With Portrait. Crown 8vo. Cloth, price 6*s.*

*** A Portrait of the Rev. Dr. J. H. Newman, mounted for framing, can be had, price 2*s.* 6*d.*

NEW WRITER (A).

Songs of Two Worlds. Third Edition. Complete in one volume with Portrait. Fcap. 8vo. Cloth, price 7*s.* 6*d.*

The Epic of Hades. Fourth and finally revised Edition. Fcap. 8vo. Cloth, price 7*s.* 6*d.*

NICHOLAS (Thomas), Ph. D., F.G.S.

The Pedigree of the English People: an Argument, Historical and Scientific, on the Formation and Growth of the Nation, tracing Race-admixture in Britain from the earliest times, with especial reference to the incorporation of the Celtic Aborigines. Fifth edition. Demy 8vo. Cloth, price 16*s.*

NICHOLSON (Edward B.), Librarian of the London Institution.

The Christ Child, and other Poems. Crown 8vo. Cloth, price 4*s.* 6*d.*

NOAKE (Major R. Compton).

The Bivouac; or, Martial Lyrist, with an Appendix—Advice to the Soldier. Fcap. 8vo. Price 5*s.* 6*d.*

NOBLE (J. A.).

The Pelican Papers. Reminiscences and Remains of a Dweller in the Wilderness. Crown 8vo. Cloth, price 6*s.*

NORMAN PEOPLE (The).

The Norman People, and their Existing Descendants in the British Dominions and the United States of America. Demy 8vo. Cloth, price 21*s.*

NORRIS (Rev. Alfred).

The Inner and Outer Life Poems. Fcap. 8vo. Cloth, price 6*s.*

Northern Question (The); Or, Russia's Policy in Turkey unmasked. Demy 8vo. Sewed, price 1*s.*

Notes on Cavalry Tactics, Organization, &c. By a Cavalry Officer. With Diagrams. Demy 8vo. Cloth, price 12*s.*

NOTREGE (John), A.M.

The Spiritual Function of a Presbyter in the Church of England. Crown 8vo. Cloth, red edges, price 3*s.* 6*d.*

Oriental Sporting Magazine (The).

A Reprint of the first 5 Volumes, in 2 Volumes. Demy 8vo. Cloth, price 28*s.*

Our Increasing Military Difficulty, and one Way of Meeting it. Demy 8vo. Stitched, price 1*s.*

PAGE (Capt. S. F.).

Discipline and Drill. Cheaper Edition. Crown 8vo. Price 1*s.*

PALGRAVE, (W. Gifford).

Hermann Agha; An Eastern Narrative. Third and Cheaper Edition. Crown 8vo. Cloth, price 6*s.*

PANDURANG HARI;
Or, Memoirs of a Hindoo. With an Introductory Preface by Sir H. Bartle E. Frere, G.C.S.I., C.B. Crown 8vo. Price 6*s.*

PARKER (Joseph), D.D.
The Paraclete: An Essay on the Personality and Ministry of the Holy Ghost, with some reference to current discussions. Second Edition. Demy 8vo. Cloth, price 12*s.*

PARR (Harriet).
Echoes of a Famous Year. Crown 8vo. Cloth, price 8*s.* 6*d.*

PAUL (C. Kegan).
Goethe's Faust. A New Translation in Rime. Crown 8vo. Cloth, price 6*s.*
William Godwin: His Friends and Contemporaries. With Portraits and Facsimiles of the Handwriting of Godwin and his Wife. 2 vols. Square post 8vo. Cloth, price 28*s.*
The Genius of Christianity Unveiled. Being Essays by William Godwin never before published. Edited, with a Preface, by C. Kegan Paul. Crown 8vo. Cloth price 7*s.* 6*d.*

PAUL (Margaret Agnes).
Gentle and Simple: A Story. 2 vols. Crown 8vo. Cloth, gilt tops, price 12*s.*

PAYNE (John).
Songs of Life and Death. Crown 8vo Cloth, price 5*s.*

PAYNE (Prof. J. F.).
Lectures on Education. Price 6*d.* each.
II. Fröbel and the Kindergarten System. Second Edition.
A Visit to German Schools: Elementary Schools in Germany. Notes of a Professional Tour to inspect some of the Kindergartens, Primary Schools, Public Girls Schools, and Schools for Technical Instruction in Hamburgh, Berlin, Dresden, Weimar, Gotha, Eisenach, in the autumn of 1874. With Critical Discussions of the General Principles and Practice of Kindergartens and other Schemes of Elementary Education. Crown 8vo. Cloth, price 4*s.* 6*d.*

PEACOCKE (Georgiana).
Rays from the Southern Cross: Poems. Crown 8vo. With Sixteen Full-page Illustrations by the Rev. P. Walsh. Cloth elegant, price 10*s.* 6*d.*

PELLETAN (E.).
The Desert Pastor, Jean Jarousseau. Translated from the French. By Colonel E. P. De L'Hoste. With a Frontispiece. New Edition. Fcap. 8vo. Cloth, price 3*s.* 6*d.*

PENNELL (H. Cholmondeley).
Pegasus Resaddled. By the Author of "Puck on Pegasus," &c. &c. With Ten Full-page Illustrations by George Du Maurier. Second Edition. Fcap. 4to. Cloth elegant, price 12*s.* 6*d.*

PENRICE (Maj. J.), B.A.
A Dictionary and Glossary of the Ko-ran. With copious Grammatical References and Explanations of the Text. 4to. Cloth, price 21*s.*

PERCIVAL (Rev. P.).
Tamil Proverbs, with their English Translation. Containing upwards of Six Thousand Proverbs. Third Edition. Demy 8vo. Sewed, price 9*s.*

PESCHEL (Dr. Oscar).
The Races of Man and their Geographical Distribution. Large crown 8vo. Cloth, price 9*s.*

PETTIGREW (J. Bell), M.D., F.R.S.
Animal Locomotion; or, Walking, Swimming, and Flying. With 130 Illustrations. Second Edition. Crown 8vo. Cloth, price 5*s.*
Volume VII. of The International Scientific Series.

PFEIFFER (Emily).
Glan Alarch: His Silence and Song. A Poem. Crown 8vo. price 6*s.*
Gerard's Monument and Other Poems. Second Edition. Crown 8vo. Cloth, price 6*s.*
Poems. Crown 8vo. Cloth, price 6*s.*

PIGGOT (J.), F.S.A., F.R.G.S.

Persia—Ancient and Modern. Post 8vo. Cloth, price 10*s.* 6*d.*

PLAYFAIR (Lieut.-Col.), Her Britannic Majesty's Consul-General in Algiers.

Travels in the Footsteps of Bruce in Algeria and Tunis. Illustrated by facsimiles of Bruce's original Drawings, Photographs, Maps, &c. Royal 4to. Cloth, bevelled boards, gilt leaves, price £3 3*s.*

POOR (Henry V.).

Money and its Laws, embracing a History of Monetary Theories and a History of the Currencies of the United States. Demy 8vo. Cloth, price 21*s.*

POUSHKIN (A. S.).

Russian Romance. Translated from the Tales of Belkin, etc. By Mrs. J. Buchan Telfer (*née* Mouravieff). Crown 8vo. Cloth, price 7*s.* 6*d.*

POWER (H.).

Our Invalids: How shall we Employ and Amuse Them? Fcap. 8vo. Cloth, price 2*s.* 6*d.*

POWLETT (Lieut. N.), R.A.

Eastern Legends and Stories in English Verse. Crown 8vo. Cloth, price 5*s.*

PRESBYTER.

Unfoldings of Christian Hope. An Essay showing that the Doctrine contained in the Damnatory Clauses of the Creed commonly called Athanasian is unscriptural. Small crown 8vo. Cloth, price 4*s.* 6*d.*

PRICE (Prof. Bonamy).

Currency and Banking. Crown 8vo. Cloth, price 6*s.*

Chapters on Practical Political Economy. Being the Substance of Lectures delivered before the University of Oxford. Large post 8vo. Cloth, price 12*s.*

PROCTOR (Richard A.), B.A.

Our Place among Infinities. A Series of Essays contrasting our little abode in space and time with the Infinities around us. To which are added Essays on "Astrology," and "The Jewish Sabbath." Third Edition. Crown 8vo. Cloth, price 6*s.*

The Expanse of Heaven. A Series of Essays on the Wonders of the Firmament. With a Frontispiece. Third Edition. Crown 8vo. Cloth, price 6*s.*

Proteus and Amadeus. A Correspondence. Edited by Aubrey De Vere. Crown 8vo. Cloth, price 5*s.*

PUBLIC SCHOOLBOY.

The Volunteer, the Militiaman, and the Regular Soldier. Crown 8vo. Cloth, price 5*s.*

Punjaub (The) and North Western Frontier of India. By an old Punjauber. Crown 8vo. Cloth, price 5*s.*

RAM (James).

The Philosophy of War. Small Crown 8vo. Cloth, price 3*s.* 6*d.*

READ (Carveth).

On the Theory of Logic: An Essay. Crown 8vo. Cloth, price 6*s.*

REANEY (Mrs. G. S.).

Blessing and Blessed; a Sketch of Girl Life. With a frontispiece. Crown 8vo. Cloth, price 5*s.*

Waking and Working; or, from Girlhood to Womanhood. With a Frontispiece. Crown 8vo. Cloth, price 5*s.*

Sunshine Jenny and other Stories. Three Illustrations. Royal 16mo. Cloth, price 1*s.* 6*d.*

Sunbeam Willie, and other Stories. Three Illustrations. Royal 16mo. Cloth, price 1*s.* 6*d.*

RHOADES (James).

Timoleon. A Dramatic Poem. Fcap. 8vo. Cloth, price 5*s.*

RIBOT (Prof. Th.).

English Psychology. Second Edition. A Revised and Corrected Translation from the latest French Edition. Large post 8vo. Cloth, price 9*s.*

RIBOT (Prof. Th.)—*continued.*

Heredity: A Psychological Study on its Phenomena, its Laws, its Causes, and its Consequences. Large crown 8vo. Cloth, price 9*s.*

RINK (Chevalier Dr. Henry).

Greenland: Its People and its Products. By the Chevalier Dr. Henry Rink, President of the Greenland Board of Trade. With sixteen Illustrations, drawn by the Eskimo, and a Map. Edited by Dr. Robert Brown. Crown 8vo. Price 10*s.* 6*d.*

ROBERTSON (The Late Rev. F. W.), M.A., of Brighton.

Notes on Genesis. Third Edition. Crown 8vo., price 5*s.*

New and Cheaper Editions:—

The Late Rev. F. W. Robertson, M.A., Life and Letters of. Edited by the Rev. Stopford Brooke, M.A., Chaplain in Ordinary to the Queen.

I. 2 vols., uniform with the Sermons. With Steel Portrait. Crown 8vo. Cloth, price 7*s.* 6*d.*

II. Library Edition, in Demy 8vo., with Two Steel Portraits. Cloth price 12*s.*

III. A Popular Edition, in 1 vol. Crown 8vo. Cloth, price 6*s.*

Sermons. Four Series. Small crown 8vo. Cloth, price 3*s.* 6*d.* each.

Expository Lectures on St. Paul's Epistles to the Corinthians. A New Edition. Small crown 8vo. Cloth, price 5*s.*

Lectures and Addresses, with other literary remains. A New Edition. Crown 8vo. Cloth, price 5*s.*

An Analysis of Mr. Tennyson's "In Memoriam." (Dedicated by Permission to the Poet-Laureate.) Fcap. 8vo. Cloth, price 2*s.*

The Education of the Human Race. Translated from the German of Gotthold Ephraim Lessing. Fcap. 8vo. Cloth, price 2*s.* 6*d.*

The above Works can also be had half-bound in morocco.

*** A Portrait of the late Rev. F. W. Robertson, mounted for framing, can be had, price 2*s.* 6*d.*

ROBINSON (A. Mary F.).

A Handful of Honeysuckle. Fcap. 8vo. Cloth, price 3*s.* 6*d.*

ROSS (Mrs. E.), ("Nelsie Brook").

Daddy's Pet. A Sketch from Humble Life. With Six Illustrations. Royal 16mo. Cloth, price 1*s.*

RUSSELL (E. R.).

Irving as Hamlet. Second Edition. Demy 8vo. Sewed, price 1*s.*

RUSSELL (Major Frank S.).

Russian Wars with Turkey, Past and Present. With Two Maps. Second Edition. Crown 8vo., price 6*s.*

RUTHERFORD (John).

The Secret History of the Fenian Conspiracy; its Origin, Objects, and Ramifications. 2 vols. Post 8vo. Cloth, price 18*s.*

SADLER (S. W.), R.N.

The African Cruiser. A Midshipman's Adventures on the West Coast. With Three Illustrations. Second Edition. Crown 8vo. Cloth, price 3*s.* 6*d.*

SAMAROW (G.).

For Sceptre and Crown. A Romance of the Present Time. Translated by Fanny Wormald. 2 vols. Crown 8vo. Cloth, price 15*s.*

SAUNDERS (Katherine).

Gideon's Rock, and other Stories. Crown 8vo. Cloth, price 6*s.*

Joan Merryweather, and other Stories. Crown 8vo. Cloth, price 6*s.*

Margaret and Elizabeth. A Story of the Sea. Crown 8vo. Cloth, price 6*s.*

SAUNDERS (John).

Israel Mort, Overman: a Story of the Mine. Crown 8vo. Price 6*s.*

Hirell. With Frontispiece. Crown 8vo. Cloth, price 3*s.* 6*d.*

Cheap Edition. With Frontispiece, price 2*s.*

Abel Drake's Wife. With Frontispiece. Crown 8vo. Cloth, price 3*s.* 6*d.*

Cheap Edition. With Frontispiece, price 2*s.*

SCHELL (Maj. von).

The Operations of the First Army under Gen. Von Goeben. Translated by Col. C. H. von Wright. Four Maps. Demy 8vo. Cloth, price 9*s.*

The Operations of the First Army under Gen. Von Steinmetz. Translated by Captain E. O. Hollist. Demy 8vo. Cloth, price 10*s.* 6*d.*

SCHELLENDORF, (Maj.-Gen. B. von).

The Duties of the General Staff. Translated from the German by Lieutenant Hare. Vol. I. Demy 8vo. Cloth, 10*s.* 6*d.*

SCHERFF (Maj. W. von).

Studies in the New Infantry Tactics. Parts I. and II. Translated from the German by Colonel Lumley Graham. Demy 8vo. Cloth, price 7*s.* 6*d.*

SCHMIDT (Prof. Oscar).

The Doctrine of Descent and Darwinism. With 26 Illustrations. Third Edition. Crown 8vo. Cloth, price 5*s.*

Volume XII. of The International Scientific Series.

SCHÜTZENBERGER (Prof. F.).

Fermentation. With Numerous Illustrations. Crown 8vo. Cloth, price 5*s.*

Volume XX. of The International Scientific Series.

SCOTT (Patrick).

The Dream and the Deed, and other Poems. Fcap. 8vo. Cloth, price 5*s.*

SCOTT (W. T.).

Antiquities of an Essex Parish; or, Pages from the History of Great Dunmow. Crown 8vo. Cloth, price 5*s.* Sewed, 4*s.*

SCOTT (Robert H.).

Weather Charts and Storm Warnings. Illustrated. Crown 8vo. Cloth, price 3*s.* 6*d.*

Seeking his Fortune, and other Stories. With Four Illustrations. Crown 8vo. Cloth, price 3*s.* 6*d.*

SENIOR (N. W.).

Alexis De Tocqueville. Correspondence and Conversations with Nassau W. Senior, from 1833 to 1859. Edited by M. C. M. Simpson. 2 vols. Large post 8vo. Cloth, price 21*s.*

Journals Kept in France and Italy. From 1848 to 1852. With a Sketch of the Revolution of 1848. Edited by his Daughter, M. C. M. Simpson. 2 vols. Post 8vo. Cloth, price 24*s.*

Seven Autumn Leaves from Fairyland. Illustrated with Nine Etchings. Square crown 8vo. Cloth, price 3*s.* 6*d.*

SEYD (Ernest), F.S.S.

The Fall in the Price of Silver. Its Causes, its Consequences, and their Possible Avoidance, with Special Reference to India. Demy 8vo. Sewed, price 2*s.* 6*d.*

SHADWELL (Maj.-Gen.), C.B.

Mountain Warfare. Illustrated by the Campaign of 1799 in Switzerland. Being a Translation of the Swiss Narrative compiled from the Works of the Archduke Charles, Jomini, and others. Also of Notes by General H. Dufour on the Campaign of the Valtelline in 1635. With Appendix, Maps, and Introductory Remarks. Demy 8vo. Cloth, price 16*s.*

SHAW (Flora L.).

Castle Blair: a Story of Youthful Lives. 2 vols. crown 8vo. Cloth, price 12*s.* Also, an edition in 1 vol. crown 8vo. 6*s.*

SHELLEY (Lady).

Shelley Memorials from Authentic Sources. With (now first printed) an Essay on Christianity by Percy Bysshe Shelley. With Portrait. Third Edition. Crown 8vo. Cloth, price 5*s.*

SHERMAN (Gen. W. T.).

Memoirs of General W. T. Sherman, Commander of the Federal Forces in the American Civil War. By Himself. 2 vols. With Map. Demy 8vo Cloth, price 24*s.*

Copyright English Edition.

SHILLITO (Rev. Joseph).

Womanhood: its Duties, Temptations, and Privileges. A Book for Young Women. Second Edition. Crown 8vo. Price 3*s.* 6*d.*

SHIPLEY (Rev. Orby), M.A.

Church Tracts, or Studies in Modern Problems. By various Writers. 2 vols. Crown 8vo. Cloth, price 5*s.* each.

SHUTE (Richard), M.A.

A Discourse on Truth. Large Post 8vo. Cloth, price 9*s.*

SMEDLEY (M. B.).

Boarding-out and Pauper Schools for Girls. Crown 8vo. Cloth, price 3*s.* 6*d.*

SMITH (Edward), M.D., LL.B., F.R.S.

Health and Disease, as Influenced by the Daily, Seasonal, and other Cyclical Changes in the Human System. A New Edition. Post 8vo. Cloth, price 7*s.* 6*d.*

Foods. Profusely Illustrated. Fourth Edition. Crown 8vo. Cloth, price 5*s.*

Volume III. of The International Scientific Series.

Practical Dietary for Families, Schools, and the Labouring Classes. A New Edition. Post 8vo. Cloth, price 3*s.* 6*d.*

Tubercular Consumption in its Early and Remediable Stages. Second Edition. Crown 8vo. Cloth, price 6*s.*

SMITH (Hubert).

Tent Life with English Gipsies in Norway. With Five full-page Engravings and Thirty-one smaller Illustrations by Whymper and others, and Map of the Country showing Routes. Third Edition. Revised and Corrected. Post 8vo. Cloth, price 21*s.*

Songs of Two Worlds. By the Author of "The Epic of Hades." Third Edition. Complete in one Volume, with Portrait. Fcap 8vo. Cloth, price 7*s.* 6*d.*

Songs for Music.

By Four Friends. Square crown 8vo. Cloth, price 5*s.*

Containing songs by Reginald A. Gatty, Stephen H. Gatty, Greville J. Chester, and Juliana Ewing.

SPENCER (Herbert).

The Study of Sociology. Fifth Edition. Crown 8vo. Cloth, price 5*s.*

Volume V. of The International Scientific Series.

SPICER (H.).

Otho's Death Wager. A Dark Page of History Illustrated. In Five Acts. Fcap. 8vo. Cloth, price 5*s.*

STAPLETON (John).

The Thames: A Poem. Crown 8vo. Cloth, price 6*s.*

STEPHENS (Archibald John), LL.D.

The Folkestone Ritual Case. The Substance of the Argument delivered before the Judicial Committee of the Privy Council. On behalf of the Respondents. Demy 8vo. Cloth, price 6*s.*

STEVENSON (Robert Louis).

An Inland Voyage. With Frontispiece by Walter Crane. Crown 8vo. Cloth, price 7*s.* 6*d.*

STEVENSON (Rev. W. F.).

Hymns for the Church and Home. Selected and Edited by the Rev. W. Fleming Stevenson.

The most complete Hymn Book published.

The Hymn Book consists of Three Parts:—I. For Public Worship.—II. For Family and Private Worship.—III. For Children.

*** *Published in various forms and prices, the latter ranging from* 8*d.* *to* 6*s. Lists and full particulars will be furnished on application to the Publishers.*

STEWART (Prof. Balfour), M.A., LL.D., F.R.S.

On the Conservation of Energy. Fifth Edition. With Fourteen Engravings. Crown 8vo. Cloth, price 5*s.*

Volume VI. of The International Scientific Series.

STONEHEWER (Agnes).

Monacell: A Legend of North Wales. A Poem. Fcap. 8vo. Cloth, price 3*s.* 6*d.*

STRETTON (Hesba). Author of "Jessica's First Prayer."

Michael Lorio's Cross and other Stories. With Two Illustrations. Royal 16mo. Cloth, price 1*s.* 6*d.*

The Storm of Life. With Ten Illustrations. Twenty-first Thousand. Royal 16mo. Cloth, price 1*s.* 6*d.*

The Crew of the Dolphin. Illustrated. Fourteenth Thousand. Royal 16mo. Cloth, price 1*s.* 6*d.*

Cassy. Thirty-eighth Thousand. With Six Illustrations. Royal 16mo. Cloth, price 1*s.* 6*d.*

The King's Servants. Forty-third Thousand. With Eight Illustrations. Royal 16mo. Cloth, price 1*s.* 6*d*

Lost Gip. Fifty-ninth Thousand. With Six Illustrations. Royal 16mo. Cloth, price 1*s.* 6*d.*

*** *Also a handsomely bound Edition, with Twelve Illustrations, price* 2*s.* 6*d.*

David Lloyd's Last Will. With Four Illustrations. Royal 16mo., price 2*s.* 6*d.*

The Wonderful Life. Thirteenth Thousand. Fcap. 8vo. Cloth, price 2*s.* 6*d.*

A Night and a Day. With Frontispiece. Twelfth Thousand. Royal 16mo. Limp cloth, price 6*d.*

Friends till Death. With Illustrations and Frontispiece. Twenty-fourth Thousand. Royal 16mo. Cloth, price 1*s.* 6*d.*; limp cloth, price 6*d.*

Two Christmas Stories. With Frontispiece. Twenty-first Thousand. Royal 16mo. Limp cloth, price 6*d.*

Michel Lorio's Cross, and Left Alone. With Frontispiece. Fifteenth Thousand. Royal 16mo. Limp cloth, price 6*d.*

STRETTON (Hesba)—*continued.*

Old Transome. With Frontispiece. Sixteenth Thousand. Royal 16mo. Limp cloth, price 6*d.*

*** Taken from "The King's Servants."

The Worth of a Baby, and how Apple-Tree Court was won. With Frontispiece. Nineteenth Thousand. Royal 16mo. Limp cloth, price 6*d.*

STUBBS (Lieut.-Colonel F. W.)

The Regiment of Bengal Artillery. The History of its Organization, Equipment, and War Services. Compiled from Published Works, Official Records, and various Private Sources. With numerous Maps and Illustrations. Two Vols. Demy 8vo. Cloth, price 32*s.*

STUMM (Lieut. Hugo), German Military Attaché to the Khivan Expedition.

Russia's advance Eastward. Based on the Official Reports of. Translated by Capt. C. E. H. VINCENT. With Map. Crown 8vo. Cloth, price 6*s.*

SULLY (James), M.A.

Sensation and Intuition. Demy 8vo. Cloth, price 10*s.* 6*d.*

Pessimism: a History and a Criticism. Demy 8vo. Price 14*s.*

Sunnyland Stories. By the Author of "Aunt Mary's Bran Pie." Illustrated. Small 8vo. Cloth, price 3*s.* 6*d.*

Supernatural in Nature, The. A Verification of Scripture by Free Use of Science. Demy 8vo. Cloth, price 14*s.*

Sweet Silvery Sayings of Shakespeare. Crown 8vo. cloth gilt, price 7*s.* 6*d.*

SYME (David).

Outlines of an Industrial Science. Second Edition. Crown 8vo. Cloth, price 6*s.*

Tales of the Zenana. By the Author of "Pandurang Hari." 2 vols. Crown 8vo. Cloth, price 21*s.*

TAYLOR (Rev. J. W. A.), M.A.

Poems. Fcap. 8vo. Cloth, price 5*s.*

TAYLOR (Sir H.).

Works Complete. Author's Edition, in 5 vols. Crown 8vo. Cloth, price 6*s.* each.

Vols. I. to III. containing the Poetical Works, Vols. IV. and V. the Prose Works.

TAYLOR (Col. Meadows), C.S.I., M.R.I.A.

A Noble Queen: a Romance of Indian History. 3 vols. Crown 8vo. Cloth.

Seeta. 3 vols. Crown 8vo. Cloth.

The Confessions of a Thug. Crown 8vo. Cloth, price 6*s.*

Tara: a Mahratta Tale. Crown 8vo. Cloth, price 6*s.*

TELFER (J. Buchan), F.R.G.S., Commander R.N.

The Crimea and Trans-Caucasia. With numerous Illustrations and Maps. 2 vols. Medium 8vo. Second Edition. Cloth, price 36*s.*

TENNYSON (Alfred).

The Imperial Library Edition. Complete in 7 vols. Demy 8vo. Cloth, price £3 13*s.* 6*d.*; in Roxburgh binding, £4 7*s.* 6*d.*

Author's Edition. Complete in 6 Volumes. Post 8vo. Cloth gilt; or half-morocco, Roxburgh style:—

VOL. I. **Early Poems, and English Idylls.** Price 6*s.*; Roxburgh, 7*s.* 6*d.*

VOL. II. **Locksley Hall, Lucretius, and other Poems.** Price 6*s.*; Roxburgh, 7*s.* 6*d.*

VOL. III. **The Idylls of the King** (*Complete*). Price 7*s.* 6*d.*; Roxburgh, 9*s.*

VOL. IV. **The Princess, and Maud.** Price 6*s.*; Roxburgh, 7*s.* 6*d.*

VOL. V. **Enoch Arden, and In Memoriam.** Price 6*s.*; Roxburgh, 7*s.* 6*d.*

TENNYSON (Alfred)—*continued.*

VOL. VI. **Dramas.** Price 7*s.*; Roxburgh, 8*s.* 6*d.*

Cabinet Edition. 12 volumes. Each with Frontispiece. Fcap. 8vo. Cloth, price 2*s.* 6*d.* each.

CABINET EDITION. 12 vols. Complete in handsome Ornamental Case. 32*s.*

Pocket Volume Edition. 13 vols. In neat case, 36*s.* Ditto, ditto. Extra cloth gilt, in case, 42*s.*

The Guinea Edition of the Poetical and Dramatic Works, complete in 12 volumes, neatly bound and enclosed in box. Cloth, price 21*s.* French morocco, price 31*s.* 6*d.*

The Shilling Edition of the Poetical and Dramatic Works, in 12 vols., pocket size. Price 1*s.* each.

The Crown Edition. Complete in 1 volume, strongly bound in cloth, price 6*s.* Cloth, extra gilt leaves, price 7*s.* 6*d.* Roxburgh, half morocco, price 8*s.* 6*d.*

*** Can also be had in a variety of other bindings.

Original Editions:

Poems. Small 8vo. Cloth, price 6*s.*

Maud, and other Poems. Small 8vo. Cloth, price 3*s.* 6*d.*

The Princess. Small 8vo. Cloth, price 3*s.* 6*d.*

Idylls of the King. Small 8vo. Cloth, price 5*s.*

Idylls of the King. Complete. Small 8vo. Cloth, price 6*s.*

The Holy Grail, and other Poems. Small 8vo. Cloth, price 4*s.* 6*d.*

Gareth and Lynette. Small 8vo. Cloth, price 3*s.*

Enoch Arden, &c. Small 8vo. Cloth, price 3*s.* 6*d.*

In Memoriam. Small 8vo. Cloth, price 4*s.*

TENNYSON (Alfred)—*continued.*

Queen Mary. A Drama. New Edition. Crown 8vo. Cloth, price 6*s.*

Harold. A Drama. Crown 8vo. Cloth, price 6*s.*

Selections from Tennyson's Works. Super royal 16mo. Cloth, price 3*s.* 6*d.* Cloth gilt extra, price 4*s.*

Songs from Tennyson's Works. Super royal 16mo. Cloth extra, price 3*s.* 6*d.*
Also a cheap edition. 16mo. Cloth, price 2*s.* 6*d.*

Idylls of the King, and other Poems. Illustrated by Julia Margaret Cameron. 2 vols. Folio Half-bound morocco, cloth sides, price £6 6*s.* each.

Tennyson for the Young and for Recitation. Specially arranged. Fcap. 8vo. Price 1*s.* 6*d.*

Tennyson Birthday Book. Edited by Emily Shakespear. 32mo. Cloth limp, 2*s.*; cloth extra, 3*s.*

THOMAS (Moy).

A Fight for Life. With Frontispiece. Crown 8vo. Cloth, price 3*s.* 6*d.*

THOMPSON (Alice C.).

Preludes. A Volume of Poems. Illustrated by Elizabeth Thompson (Painter of "The Roll Call"). 8vo. Cloth, price 7*s.* 6*d.*

THOMPSON (Rev. A. S.).

Home Words for Wanderers. A Volume of Sermons. Crown 8vo. Cloth, price 6*s.*

Thoughts in Verse.

Small Crown 8vo. Cloth, price 1*s.* 6*d.*

THRING (Rev. Godfrey), B.A.

Hymns and Sacred Lyrics. Fcap. 8vo. Cloth, price 5*s.*

TODD (Herbert), M.A.

Arvan; or, The Story of the Sword. A Poem. Crown 8vo. Cloth, price 7*s.* 6*d.*

TODHUNTER (Dr. J.)

Laurella; and other Poems. Crown 8vo. Cloth, price 6*s.* 6*d.*

TRAHERNE (Mrs. A.).

The Romantic Annals of a Naval Family. A New and Cheaper Edition. Crown 8vo. Cloth, price 5*s.*

TREMENHEERE (Lieut.-Gen. C. W.)

Missions in India: the System of Education in Government and Mission Schools contrasted. Demy 8vo. Sewed, price 2*s.*

TURNER (Rev. C. Tennyson).

Sonnets, Lyrics, and Translations. Crown 8vo. Cloth, price 4*s.* 6*d.*

TYNDALL (John), L.L.D., F.R.S.

The Forms of Water in Clouds and Rivers, Ice and and Glaciers. With Twenty-five Illustrations. Seventh Edition. Crown 8vo. Cloth, price 5*s.*
Volume I. of The International Scientific Series.

VAMBERY (Prof. A.).

Bokhara: Its History and Conquest. Second Edition. Demy 8vo. Cloth, price 18*s.*

VAN BENEDEN (Mons.).

Animal Parasites and Messmates. With 83 Illustrations. Second Edition. Cloth, price 5*s.*
Volume XIX. of The International Scientific Series.

VINCENT (Capt. C. E. H.).

Elementary Military Geography, Reconnoitring, and Sketching. Compiled for Non-Commissioned Officers and Soldiers of all Arms. Square crown 8vo. Cloth, price 2*s.* 6*d.*

VOGEL (Dr. Hermann).

The Chemical effects of Light and Photography, in their application to Art, Science, and Industry. The translation thoroughly revised. With 100 Illustrations, including some beautiful specimens of Photography. Third Edition. Crown 8vo. Cloth, price 5*s.*
Volume XV. of The International Scientific Series.

VYNER (Lady Mary).

Every day a Portion. Adapted from the Bible and the Prayer Book, for the Private Devotions of those living in Widowhood. Collected and edited by Lady Mary Vyner. Square crown 8vo. Cloth extra, price 5*s*.

WARTENSLEBEN (Count H. von).

The Operations of the South Army in January and February, 1871. Compiled from the Official War Documents of the Head-quarters of the Southern Army. Translated by Colonel C. H. von Wright. With Maps. Demy 8vo. Cloth, price 6*s*.

The Operations of the First Army under Gen. von Manteuffel. Translated by Colonel C. H. von Wright. Uniform with the above. Demy 8vo. Cloth, price 9*s*.

WATERFIELD, W.

Hymns for Holy Days and Seasons. 32mo. Cloth, price 1*s*. 6*d*.

WAY (A.), M.A.

The Odes of Horace Literally Translated in Metre. Fcap. 8vo. Cloth, price 2*s*.

WELLS (Capt. John C.), R.N.

Spitzbergen—The Gateway to the Polynia; or, A Voyage to Spitzbergen. With numerous Illustrations by Whymper and others, and Map. New and Cheaper Edition. Demy 8vo. Cloth, price 6*s*.

WETMORE (W. S.).

Commercial Telegraphic Code. Second Edition. Post 4to. Boards, price 42*s*.

WHITAKER (Florence).

Christy's Inheritance. A London Story. Illustrated. Royal 16mo. Cloth, price 1*s*. 6*d*.

WHITE (A. D.), LL.D.

Warfare of Science. With Prefatory Note by Professor Tyndall. Second Edition. Crown 8vo. Cloth, price 3*s*. 6*d*.

WHITE (Capt. F. B. P.).

The Substantive Seniority Army List—Majors and Captains. 8vo. Sewed, price 2*s*. 6*d*.

WHITNEY (Prof. W. D.)

The Life and Growth of Language. Second Edition. Crown 8vo. Cloth, price 5*s*. *Copyright Edition.*

Volume XVI. of The International Scientific Series.

Essentials of English Grammar for the Use of Schools. Crown 8vo. Cloth, price 3*s*. 6*d*.

WHITTLE (J. L.), A.M.

Catholicism and the Vatican. With a Narrative of the Old Catholic Congress at Munich. Second Edition. Crown 8vo. Cloth, price 4*s*. 6*d*.

WICKHAM (Capt. E. H., R.A.)

Influence of Firearms upon Tactics: Historical and Critical Investigations. By an OFFICER OF SUPERIOR RANK (in the German Army). Translated by Captain E. H. Wickham, R.A. Demy 8vo. Cloth, price 7*s*. 6*d*.

WILBERFORCE (H. W.).

The Church and the Empires. Historical Periods. Preceded by a Memoir of the Author by John Henry Newman, D.D. of the Oratory. With Portrait. Post 8vo. Cloth, price 10*s*. 6*d*.

WILKINSON (T. L.).

Short Lectures on the Land Laws. Delivered before the Working Men's College. Crown 8vo. Limp Cloth, price 2*s*.

WILLIAMS (A. Lukyn).

Famines in India; their Causes and Possible Prevention. The Essay for the Le Bas Prize, 1875. Demy 8vo. Cloth, price 5*s*.

WILLIAMS (Charles), one of the Special Correspondents attached to the Staff of Ghazi Ahmed Mouktar Pasha.

The Armenian Campaign: Diary of the Campaign of 1877 in Armenia and Koordistan. With Two Special Maps. Large post 8vo. Cloth, price 10*s.* 6*d.*

WILLIAMS (Rowland), D.D.

Life and Letters of, with Extracts from his Note-Books. Edited by Mrs. Rowland Williams. With a Photographic Portrait. 2 vols. Large post 8vo. Cloth, price 24*s.*

Psalms, Litanies, Counsels and Collects for Devout Persons. Edited by his Widow. New and Popular Edition. Crown 8vo. Cloth, price 3*s.* 6*d.*

WILLIS (R., M.D.)

Servetus and Calvin: a Study of an Important Epoch in the Early History of the Reformation. 8vo. Cloth, price 16*s.*

WILLOUGHBY (The Hon. Mrs.).

On the North Wind—Thistledown. A Volume of Poems. Elegantly bound. Small crown 8vo. Cloth, price 7*s.* 6*d.*

WILSON (H. Schütz).

Studies and Romances. Crown 8vo. Cloth, price 7*s.* 6*d.*

WILSON (Lieut.-Col. C. T.).

James the Second and the Duke of Berwick. Demy 8vo. Cloth, price 12*s.* 6*d.*

WINTERBOTHAM (Rev. R.), M.A., B.Sc.

Sermons and Expositions. Crown 8vo. Cloth, price 7*s.* 6*d.*

WOINOVITS (Capt. I.).

Austrian Cavalry Exercise. Translated by Captain W. S. Cooke. Crown 8vo. Cloth, price 7*s.*

WOOD (C. F.).

A Yachting Cruise in the South Seas. With Six Photographic Illustrations. Demy 8vo. Cloth, price 7*s.* 6*d.*

WRIGHT (Rev. David), M.A.

Waiting for the Light, and other Sermons. Crown 8vo. Cloth, price 6*s.*

WYLD (R. S.), F.R.S.E.

The Physics and the Philosophy of the Senses; or, The Mental and the Physical in their Mutual Relation. Illustrated by several Plates. Demy 8vo. Cloth, price 16*s.*

YONGE (C. D.).

History of the English Revolution of 1688. Crown 8vo. Cloth, price 6*s.*

YOUMANS (Eliza A.).

An Essay on the Culture of the Observing Powers of Children, especially in connection with the Study of Botany. Edited, with Notes and a Supplement, by Joseph Payne, F.C.P., Author of "Lectures on the Science and Art of Education," &c. Crown 8vo. Cloth, price 2*s.* 6*d.*

First Book of Botany. Designed to Cultivate the Observing Powers of Children. With 300 Engravings. New and Enlarged Edition. Crown 8vo. Cloth, price 5*s.*

YOUMANS (Edward L.), M.D.

A Class Book of Chemistry, on the Basis of the New System. With 200 Illustrations. Crown 8vo. Cloth, price 5*s.*

ZIMMERN (H.).

Stories in Precious Stones. With Six Illustrations. Third Edition. Crown 8vo. Cloth, price 5*s.*

THE NINETEENTH CENTURY.

A Monthly Review, edited by JAMES KNOWLES, *price 2s. 6d.*

Vols. 1 and 2 (Price 14s. each) and Vol. 3 (Price 17s.) contain Contributions by the following Writers:

The Duke of Argyll.
Mr. Matthew Arnold.
Rabbi Hermann Adler.
Mr. Arthur Arnold.
Rev. J. Baldwin Brown.
Mr. Edgar Bowring.
Mr. Thomas Brassey, M.P.
Mr. Edgar A. Bowring.
Sir Thomas Bazley, Bart., M.P.
Professor George von Bunsen.
Rev. Dr. George Percy Badger.
Rev. Canon Barry.
Dr. H. Charlton Bastian.
Professor Clifford.
Dr. Carpenter.
Professor Colvin.
Mr. Grant Duff, M.P.
Mr. Edward Dicey.
Rev. R. W. Dale.
Mr. J. A. Froude.
Mr. Archibald Forbes.
Rt. Hon. W. E. Gladstone, M.P.
Bishop of Gloucester and Bristol.
Mr. W. R. Greg.
Professor Huxley.
Mr. Frederick Harrison.
Mr. George Jacob Holyoake.
Mr. R. H. Hutton.
Mr. Henry Irving.
Sir John Lubbock, M.P.
Cardinal Manning.
Rev. Dr. Martineau.
Rev. Malcolm MacColl.
Professor Henry Morley.
His Highness Midhat Pasha.
Professor Henry Morley.
Mr. A. H. Mackonochie.
Rt. Hon. Lyon Playfair, M.P.
Mr. George Potter.
Viscount Stratford de Redcliffe.
Professor Croom Robertson.
Rev. J. Guiness Rogers.
Professor Ruskin.
Mr. W. R. S. Ralston.
The Very Rev. the Dean of St. Paul's.
Lord Selborne.
Sir James Fitzjames Stephen.
Rt. Hon. James Stansfeld, M.P.
Mr. James Spedding.
Professor Godwin Smith.
Professor Tyndall.
Mr. Tennyson.
Sir Julius Vogel.
Dr. Ward.
Major Gen. Sir Garnet Wolseley.
The Very Rev. the Dean of Westminster.
The Right Rev. Chas. Wordsworth, Bishop of St. Andrew's.
Mr. Frederick Wedmore.
Sir Thomas Watson.
&c. &c.

LONDON:
C. KEGAN PAUL AND CO.,
1, PATERNOSTER SQUARE.

CHISWICK PRESS:—CHARLES WHITTINGHAM, TOOKS COURT, CHANCERY LANE.